

1
अधीक्षण अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य अंचल, पटना

पत्रांक :- 1836 (3150)

पटना/दिनांक 26/11/2020

प्रेषक,

अधीक्षण अभियंता
ग्रामीण कार्य विभाग
कार्य अंचल, पटना

सेवा में,

मुख्य अभियंता-4
ग्रामीण कार्य विभाग
बिहार, पटना

विषय :- कार्य प्रमंडल, पटना के अधीन अतिवृष्ट से क्षतिग्रस्त पथ में हुए तत्काल मरम्मत कार्य का डी0पी0आर0 के संबंध में।

प्रसंग :- कार्यपालक अभियंता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, पटना का पत्रांक-1552 अनु० दिनांक-27.10.2020

महाशय,

उपर्युक्त विषयक प्रासंगिक पत्र से प्राप्त विषयांकित योजनान्तर्गत निम्न 04 (चार) योजनाओं का डी0पी0आर0 को तकनीकी अनुमोदन कर प्रशासनिक स्वीकृत हेतु समर्पित किया जाता है।

क्रमांक	योजना का नाम	पथ लंबाई (कि०मी० में)	क्षतिग्रस्त पथ की लंबाई (कि०मी० में)	प्राक्कलित राशि (लाख में)
1.	NH Chakpul Se Saidanichak Bhaya Khaira Toli Path	1.60	0.525	15.650
2.	Sheikpura Se Saidanichak via Pipra Path	1.00	0.650	36.115
3.	Bariya to Manoharpur Kachuara	2.40	0.990	32.447
4.	NH-30 to Nand Lal Chapra	3.60	0.815	26.189

अनु०-यथोक्त। (दो-दो प्रति में)

विश्वासभाजन

(Signature)

अधीक्षण अभियंता
ग्रामीण कार्य विभाग, कार्य अंचल, पटना

(29)

कार्यपालक अभियन्ता का कार्यालय
ग्रामीण कार्य विभाग, कार्य प्रमंडल, बाढ़


पत्रांक 967 / 279 / बाढ़ / दिनांक 17/11/2020

प्रेषक,

कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग,
कार्य प्रमंडल बाढ़।

सेवा में,

अधीक्षण अभियन्ता,
ग्रामीण कार्य विभाग,
कार्य अंचल पटना।

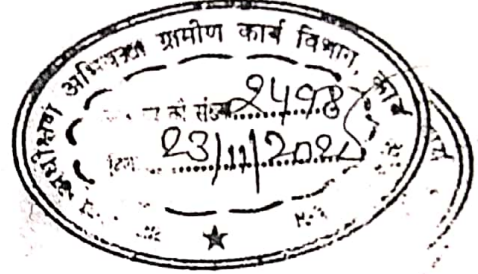

विषय :- वर्ष 2020 में बाढ़ में क्षतिग्रस्त पथों को मोटरेबुल करने हेतु किये गये कार्य की जाँच के संबंध में।

प्रसंग :- भवदीय का पत्रांक 1481 दिनांक 15.09.2020 एवं पत्रांक 1771 दिनांक 07.11.2020

महाशय,

उपरोक्त विषयक प्रासंगिक पत्र के निर्देश के अलोक में ग्रामीण कार्य विभाग, कार्य प्रमंडल पटना का अतिवृष्टि एवं बाढ़ से क्षतिग्रस्त निम्नलिखित पाँच पथों का स्थलीय जाँच कर जाँच प्रतिवेदन विहित प्रपत्र में भरकर आवश्यक कार्रवाई हेतु समर्पित किया जाता है जो संतोषजनक पाया गया।

क्रमांक	पथ का नाम	पथ की लम्बाई	क्षतिग्रस्त पथ की लम्बाई
1	2	3	4
1	Sheikpura Se Saidanichka Via Pipra Path	1.00 KM	0.650 KM
2	NH Chakpul Se Saidanichak Bhaya Khaira Toli Path	1.60 KM	0.525 KM
3	NH30 to Nand Lal Chapra	3.60 KM	0.815 KM
4	Bariya to Manoharpur Kachuara	2.40 KM	0.990 KM
5	Punadih School Murajpur	4.00 KM	0.075 KM

अनु०:- निरीक्षण प्रतिवेदन प्रपत्र संलग्न।
(दो प्रतियों में)

विश्वासभाजन

17/11/20
कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, बाढ़

Inspection Report for Flood Damage Work

Date:.....

1. Name of PIU:- *Executive Engineer, R.W.D.(W) Division Palna*
2. Name of Block/Road:- *Sampat Chak/Sheikhpura to Saidal Chak via Piprapath*
3. For Road:-
4. Damage Location/Chainage:- *25m to 400m, 430m to 705m*
5. Damage Length:- *650m*
6. Nature of Damage:- *Damage to due to heavy rain.*
 - I. Material being used in Restoration Works:- *brick bats.*
 - II. Equipments/Tools being used in Restoration Works:- *Tractor, J.C.B. Roller etc*
 - III. Procedure taken up in Restoration Works:- *Brick bats laying, spreading and Compaction.*
 - IV. Restored Length:- *650 M.*

B. For Bridge

1. Damage Location/Chainage:-
 2. Damage Length:-
 3. Nature of Damage:-
 4. Details of Restoration Works:-
- } N/A
- I. Material being used in Restoration Works:-
 - II. Equipments/Tools being used in Restoration Works:-
 - III. Procedure taken up in Restoration Works:-
 - IV. Restored Length
- } N/A

Kanadh
10/11/20

AE.

[Signature], 10/11/20
Name of Inspector
Executive Engineer
R.W.D, Works Division Barh



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar


BIHAR RURAL ROADS PROJECT

Bihar Rural Road Development Agency (BRRDA)

Govt. of Bihar



**EMERGENT REPAIR OF ROAD FROM EMERGENT REPAIR OF ROAD
FROM SHEIKPURA SE SAIDANICHAK VIA PIPRA PATH UNDER FDR**

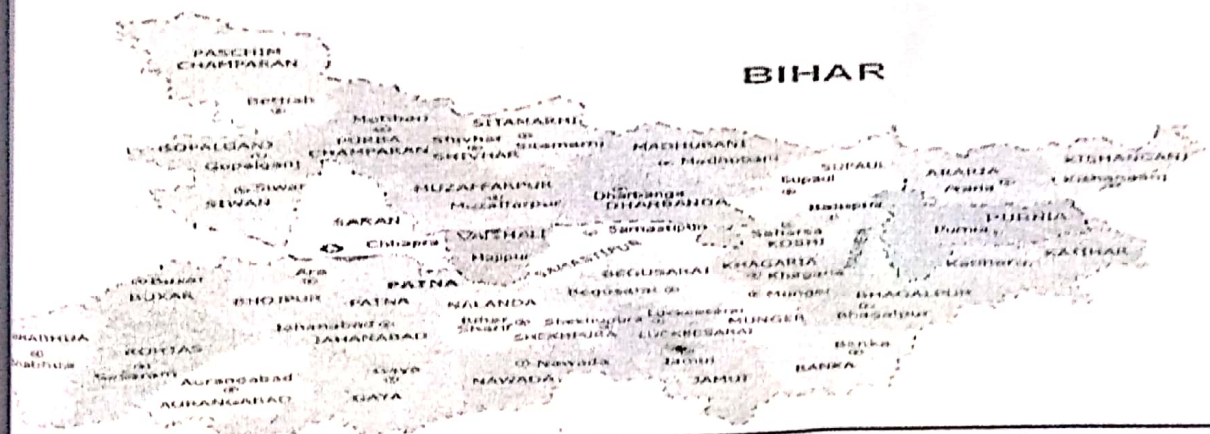

Name of the Road :-

**EMERGENT REPAIR OF ROAD FROM SHEIKPURA SE SAIDANICHAK VIA PIPRA
PATH UNDER FDR**

DISTRICT	:	Patna	
DIVISION	:	Patna	
BLOCK	:	SAMPATCHAK	
TOTAL COST OF CONSTRUCTION	:	36.115 35.651 25.822	Lac
TOTAL COST OF PROJECT	:	36.115 35.651 25.822	Lac

Executive Engineer
Rural Works Division, PATNA
Patna

O/C

SUMMARY OF COST ESTIMATE FOR THE PROJECT

NAME OF ROAD :

EMERGENT REPAIR OF ROAD FROM SHEIKPURA SE
SAIDANICHAK

DISTRICT

PATNA

BLOCK

SAMPATCHAK

DIVISION

PATNA

Sl. No.	DESCRIPTION	AMOUNT (LAKHS)
1	BRICK BATS	
		30.176 30.169
	TOTAL COST IN LACS =	30.176 30.169
	GST @ 12 % ON (PART A)	3.621 3.620
	LABOUR CESS GST @ 1 % ON (PART A)	0.302 0.302
	SUB TOTAL WITH GST & Labour cess	34.099 34.091
	CNC @ 1 %	0.341 0.341
	TOTAL	34.44 34.432
	Provision for contingencies @ 10%	1.675 1.396
	TOTAL COST OF PROJECT IN LACS =	36.115 35.827

[Signature]
E
RWD

[Signature]
AE
RWD

[Signature]
EE
RWD

Technically approved for Rs. 36.115 (Rupees Thirty six lakhs

eleven thousand and fifty five hundred only)

including five year Maintenance Cost

[Signature]
25/11/2020
Estimator
R.W.D.
Works Circle, Patna

[Signature]
25/11/2020
प्रावकलन पदाधिकारी
ग्रामीण कार्य विभाग
कार्य अंचल पटना

[Signature]
25.11.2020
तथापनी सलाहकार
ग्रामीण कार्य विभाग
कार्य अंचल, पटना

[Signature]
26/11/2020
Superintending Engineer
R.W.D. WORKS CIRCLE, PATNA