



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar


BIHAR RURAL ROADS PROJECT

Bihar Rural Road Development Agency (BRRDA)

Govt. of Bihar



EMERGENT REPAIR OF ROAD FROM MUKHYA KHAGAU ROAD BATALA TO ADAMPUR MUSHARI TAK KI ORE JANE WALI ROAD UNDER FDR AT- DANAPUR BLOCK IN PATNA DISTRICT.

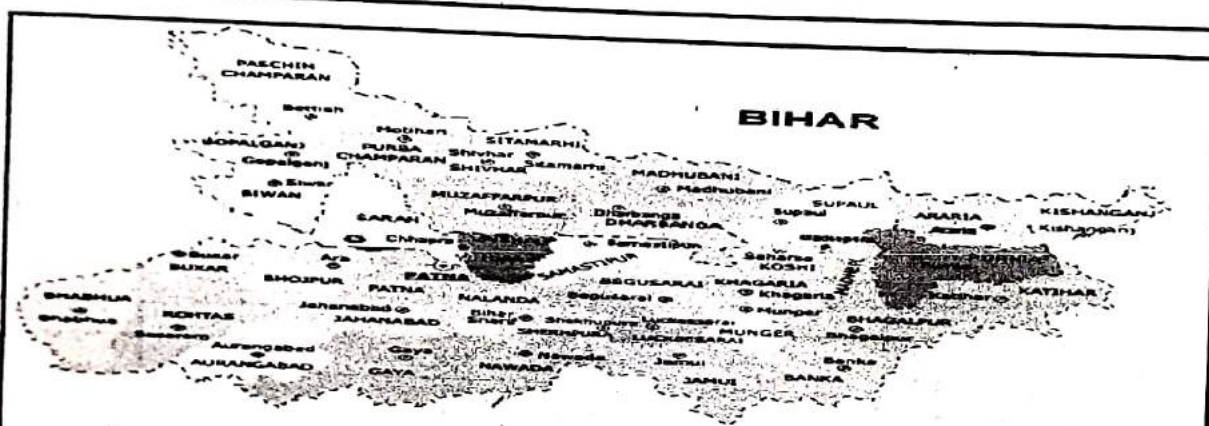

Name of the Road :-

EMERGENT REPAIR OF ROAD FROM MUKHYA KHAGAU ROAD BATALA TO ADAMPUR MUSHARI TAK KI ORE JANE WALI ROAD UNDER FDR

DISTRICT	:	Patna	
DIVISION	:	DANAPUR	
BLOCK	:	DANAPUR	
Total Length of Road	:	1.10	km
Total Damaged Length Of Road	:	0.900	km
TOTAL COST OF CONSTRUCTION	:	21.439	Lacs
TOTAL COST OF PROJECT	:	21.439	Lacs

Executive Engineer
Rural Works Division, Danapur
Danapur

प्रतिवेदन

कार्य का नाम : मुख्य खगौल पथ बटाला से आदमपुर मुसहरी तक
जानेवाली पथ की आपातकालीन मरम्मत ।

पथ की लम्बाई : 1.100 कि०मी०

प्राक्कलित राशि: मो० 21.439 लाख

मद : एफ०डी०आर०

प्रस्तुत प्राक्कलन दानापुर प्रखण्ड अन्तर्गत मुख्य खगौल पथ बटाला से आदमपुर मुसहरी तक जानेवाली पथ की आपातकालीन मरम्मत का वर्तमान अनुसूचित दर पर मो० 21.439 लाख (इक्कीस लाख तेतालीस हजार नौ सौ) रुपये मात्र का तैयार किया गया है । इस माह में लगातार अतिवृष्टि से पथ काफी क्षतिग्रस्त हो गया है । आवागमन बन्द है । विभागीय निर्देशानुसार पथ को मोटरेबूल करने हेतु ब्रीक्स वैट भरने का प्रावधान प्राक्कलन में किया गया है । जनहित में पथ को मोटरेबूल करना अति आवश्यक है । अतः प्राक्कलन की स्वीकृति जनहित में अतिआवश्यक है ।

निवेदन है कि प्राक्कलन में अतिआवश्यक है ।


कनीय अभियंता
दानापुर

सहायक अभियंता
दानापुर


कार्यपालक अभियंता
(ग्रामीण कार्य विभाग)
कार्य प्रमोडल, दानापुर
०१/०१/२०

SUMMARY OF COST ESTIMATE FOR THE PROJECT

NAME OF ROAD :

EMERGENT REPAIR OF ROAD FROM MUKHYA
KHAGAUL ROAD BATALA TO ADAMPUR MUSHARI
TAK KI ORE JANE WALI ROAD UNDER FDR


DISTRICT
BLOCK
DIVISION

PATNA
DANAPUR
DANAPUR

Sl. No.	DESCRIPTION	AMOUNT (LAKHS)
1	BRICK BATS	1887807.009
	TOTAL COST IN LACS =	18.878
	GST @ 12 % ON (PART A)	2.265
	LABOUR CESS GST @ 1 % ON (PART A)	0.189
	SUB TOTAL WITH GST & Labour cess	21.332
	CNC @0.5%	0.107
	TOTAL	21.439
	TOTAL COST OF PROJECT IN LACS =	21.439


JE
RWD


AE
RWD


EE
RWD

01/07/20

Details of Road & Bridge

Bill No.	Wing	Circle	District	Division	Road/Bridge Name	Scheme Name	Status (Comp./On Going)	Is Maintenance (Y/N)	Length (in Km)	Damage Part Length During Flood	Restoration Amount (in Lakh)	Remarks	FDR Fin Year	Type R/B	Start Point		Intermediate Point		End Point	
															Latitude	Longitude	Latitude	Longitude	Latitude	Longitude
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
1	CE-1 Patna	Patna	Patna	Danapur	Mudhya Khagaul Road Batala to Adampur Mushari Tak to ore Jane Well Road	FDR	On Going	No	1.100	0.900	21.439	Badly Damaged & Traffic Closed	2020-21	Road	25.59148	85.04251	25.59308	85.04251	25.5941	85.04251
2	CE-1 Patna	Patna	Patna	Danapur	Sarvodaya City Adampur to Lakhani Bigha Tak	FDR	On Going	No	0.600	0.450	11.694	Badly Damaged & Traffic Closed	2020-21	Road	25.59567	85.03197	25.59408	85.03197	25.5943	85.03197

20/10/2020

20/10/2020

R. V. D (u)
Dir. Danapur
07/9/2020

RURAL WORKS DEPARTMENT

(Govt. of Bihar)

EMERGENT REPAIR OF ROAD FROM MUKHYA KHAGAU ROAD BATALA TO ADAMPUR
NAME OF ROAD : MUSHARI TAK KI ORE JANE WALI ROAD UNDER FDR

BLOCK DANAPUR DIV(RWD)-DANAPUR

DISTRICT PATNA CIRCLE(RWD)-PATNA

Sl. No.	SDB Sl. No.	MORD ReIN	Item Description	Unit	Length	Width	Height	Quantity	Rate	Amount (In Rs.)
1			Providing and laying jhana khoa or Stone filter under brick pitching or boulder pitching in slope or apron or at any other place including light ramming etc. All complete as per approved design specification and direction of E/A .QTY VIDE POT MEASUREMENT	Cum				825.00	2288.25	1887807.01

TOTAL= 1887807.01

[Signature]
20/07/20
JE(RWI)

[Signature]
20/07/20
A E (RWD)

[Signature]
11/9/20
E E(RWD)
WORK DIVISION
DANAPUR

पत्रांक:- 964/3137

मसौदी/दिनांक:- 16.10.2020

प्रेषक :

कार्यपालक अभियंता
ग्रामीण कार्य विभाग,
कार्य प्रमंडल मसौदी।

सेवा में,

अधीक्षक अभियंता
ग्रामीण कार्य विभाग,
कार्य अंचल, पटना।

विषय:-वर्ष-2019 के बाढ़ में क्षतिग्रस्त पथों को मोटरेबुल करने हेतु किये गये कार्य की जाँच के संबंध में।

प्रसंग:-विभागीय पत्रांक-मु0अ0-4 (मु0) विविध (कार्य)-23-291/2019-3976 दिनांक-11.09.2019
एवं भवदीय पत्रांक-1481 दिनांक-15.09.2020

महाशय,

उपर्युक्त विषयक प्रासंगिक पत्र के निर्देश के आलोक में ग्रामीण कार्य विभाग, कार्य प्रमंडल दानापुर का निम्नलिखित दो पथों का दिनांक-13.10.2020 को बाढ़ क्षतिग्रस्त मरम्मत कार्य का जाँच किया गया एवं किया गया कार्य संतोषप्रद पाया गया।

सूचनार्थ समर्पित।

क्रमांक	पथ का नाम	पथ की लम्बाई	क्षतिग्रस्त पथ की लम्बाई
1	सर्वोदय सिटी आदमपुर से लखनी बिगहा पथ	0.600	0.450
2	मुख्य खगौल रोड बटाला से आदमपुर मुशहरी तक जाने वाली सड़क	1.100	0.900

अनु0:- निरीक्षण प्रतिवेदन प्रपत्र संलग्न।
(दो प्रतियों में)

विश्वासभाजन

16/10/2020
कार्यपालक अभियंता
ग्रामीण कार्य विभाग,
कार्य प्रमंडल मसौदी।

Inspection Report for Flood Damage Work

Date:....13/10/2020

1. Name of PIU:- Executive Engineer, R.W.D(W) Division Darnapur
2. Name of Block/Road:- Darnapur / Main Khajaul Road Bata,la to
3. For Road:- Adampur Mushari Jane wali Road.
4. Damage Location/Chainage:- Ch. 0m to 750 m and 950 m to 1100 m
5. Damage Length:- 900 m
6. Nature of Damage:- Damage due to heavy Rain
 - I. Material being used in Restoration Works:- Brick Bats
 - II. Equipments/Tools being used in Restoration Works:- J.C.B, Tractor, Roller
 - III. Procedure taken up in Restoration Works:- Brick bats laying, spreading and Compacting.
 - IV. Restored Length:- 900 m

B. For Bridge

1. Damage Location/Chainage:-
 2. Damage Length:-
 3. Nature of Damage:-
 4. Details of Restoration Works:-
- N/A
- I. Material being used in Restoration Works:-
 - II. Equipments/Tools being used in Restoration Works:-
 - III. Procedure taken up in Restoration Works:-
 - IV. Restored Length
- N/A

13/10/2020
Name of Inspector
Executive Engineer
R.W.D Works Division
Masaurhi