



लखीसराय समाहरणालय (जिला गोपनीय शाखा)



पत्रांक 2376 / गो0

लखीसराय, दिनांक- 16.10.2020

प्रेषक,

जिलाधिकारी
लखीसराय।

सेवा में,

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग, कार्य प्रमंडल,
लखीसराय।

विषय :- बिहार विधान सभा आम निर्वाचन, 2020 के मददेनजर ग्रामीण क्षेत्र के सड़को को वाहन परिचालन योग्य बनाने के संबंध में।

महाशय,


उपर्युक्त विषय के संबंध में कहना है कि बिहार विधान सभा आम निर्वाचन, 2020 को लेकर सभी प्रखंडों में मतदान केन्द्र बनाये गये हैं। मतदाताओं एवं मतदान कर्मियों/सुरक्षा बलों के मतदान केन्द्र तक सुगम पहुँच हेतु सम्पर्क पथ का वाहन परिचालन योग्य (Motorable) होना आवश्यक है। इस निमित्त जिला अन्तर्गत मरम्मत किये जाने वाले सड़क का विवरण इस प्रकार है :-

क्र0	पथ का नाम	सड़क की लम्बाई
01	रेहुआ रोड से बालिका विद्यापीठ के पीछे गेट नं0-02 (एन0एच0-80) तक सड़क	0.600 कि0मी0
02	रेहुआ रोड से आई0टी0आई0 कैम्पस तक सड़क	0.300 कि0मी0
03	मध्य विद्यालय नवकाडीह से मध्य विद्यालय तक सड़क	0.60 कि0मी0
04	शृंगारपुर मोड़ से रामेश्वर धाम तक सड़क	1.10 कि0मी0
05	पचौता ग्राम से पतनेर मोड़ तक सड़क की मरम्मत	1.60 कि0मी0
06	दैताबोध रोड से पवैय हॉल्ट तक	1.2 कि0मी0
07	पचना सड़क से अमहरा तक	06 कि0मी0
08	गिरधरपुर पंचायत से सदायविगहा	
09	ऐजनीघाट से रेपुरा ग्राम तक	

ज्ञातव्य है कि लखीसराय जिले में दिनांक-28.10.2020 को प्रथम चरण में मतदान निर्धारित है। उक्त आलोक में उपरोक्त पथांशों को कार्य हित में मोटरेबुल करना आवश्यक है।

अतः अनुरोध है कि उक्त वर्णित सभी पथांशों का युद्धस्तर पर निर्वाचन तिथि के पूर्व मरम्मत/मोटरेबुल कराना सुनिश्चित करेंगे।

विश्वासभाजन


जिलाधिकारी,
लखीसराय।



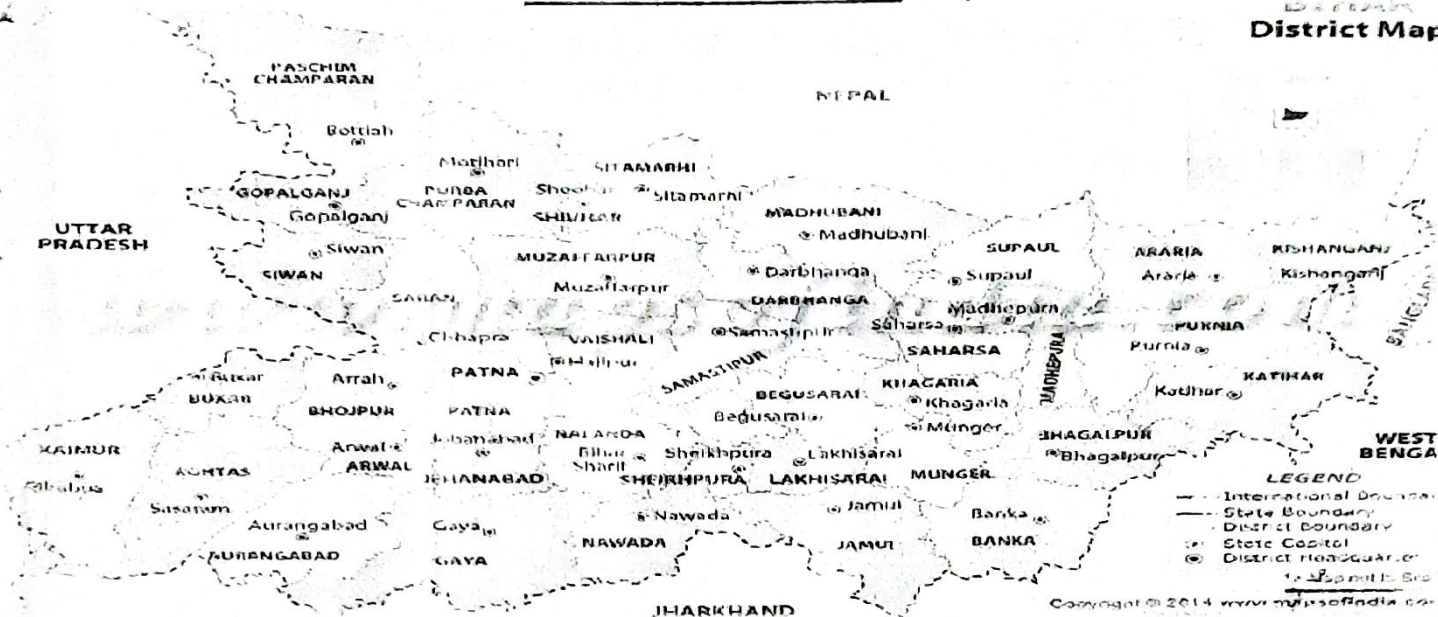
ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

DETAILED PROJECT REPORT FOR FDR(2245)

YEAR (2020 - 2021)

District Map



DISTRICT	:-	LAKHISARAI
BLOCK	:-	LAKHISARAI
NAME OF ROAD	:-	RESTORATION OF WORK FROM REHUAA ROAD TO BEHIND BALIKA VIDIYAPITH GATE NO.2 (NH-80) ROAD
TOTAL LENGTH OF ROAD	:-	0.600 KM
TOTAL COST OF CONSTRUCTION INCLUDING 12% GST & 1% LABOUR CESS	:-	1.89 LAKH
COST OF ROAD CONSTRUCTION PER KM	:-	3.15 LAKH
5 YEAR MAINTENANCE COST INCLUDING 12% GST & 1% LABOUR CESS	:-	0.00 LAKH
Contingency 2.25% On Construction Cost	:-	0.00 LAKH
TOTAL COST OF PROJECT	:-	1.89 LAKH
TOTAL PROJECT COST PER KM	:-	3.150 LAKH

SUBMITTED BY:

EXECUTIVE ENGINEER
RWD (W) DIVISION, LAKHISARAI
LAKHISARAI

TA COPY
WITH S.F.

FDR

YEAR (2020-21)

GENERAL ABSTRACT OF COST

Block:--LAKHISARAI

District:--LAKHISARAI


Length of Road:-- 0.600 KM

Name of Road:-- RESTORATION OF WORK FROM REHUAA ROAD TO BEHIND
BALIKA VIDYAPITH GATE NO.2 (NH-80) ROAD

SL. No.	Item of Work	Amount
A	COST OF CONSTRUCTION	1.62 Lacs
	ADD 1% LABOUR CESS ON CONSTRUCTION COST	0.02 Lacs
	ADD 12% GST ON CONSTRUCTION COST	0.19 Lacs
	SEIGNIORAGE FEE 10% ON BASIC COST OF MINES MATERIAL	0.05 Lacs
	TOTAL COST OF CONSTRUCTION	1.89 Lacs
C	AVERAGE COST PER KM	3.15 Lacs
TOTAL COST INCLUDING 5YRS. MAINTENANCE		1.89 Lacs


20/10/2020
Junior Engineer
RWD (w) Division,
Lakhisarai


20/10/2020
Asstt. Engineer
RWD (w) Division, Lakhisarai


20/10/2020
Executive Engineer
RWD (w) Division,
Lakhisarai

Estimate) Cost

Construction Cost: Rs. 1.89 Lakh

Ref. E.E. Letter No.....dt.....

Technically Approved for Rs. 1.89 Lakh

(Rupees one lakh eighty
nine thousand) Only.

for construction work & 5 Years Maintenance.

Handwritten Signature
14/12/2020


**Superintending Engineer
Rural Works Department
Works Circle, Munger**

Cost Estimate for Road Work

FORMAT F6

Sl. No.	SDB SL. NO	MORD Rel. No	Description	Unit	NOS	LENGTH	WIDTH	HEIGHT	QUANTITY	RATE	AMOUNT (in Rs.)
SUB HEAD : PREPARATORY WORKS, SITE CLEARANCE, DISMANTLING											
1	2.2	201 (I-A)	Clearing and Grubbing Road Land (By manual means) including uprooting wild vegetation , grass bushes, shrubs, saplings and trees of girth upto 300mm , removals of stumps of such trees cut earlier & disposal of unserviceable materials & stacking of serviceable materials to be used or auctioned upto a lead of 1000 m including removal and disposal of top organic soil not exceeding 150mm in thickness as per technical specification - clause 201.1 and direction of E/I								
				Ha	2	600.00	0.75		900.00 0.09	52,970.33	4,767.00
Sub Head : PAVEMENT LAYERS - GSB & WBM ITEMS											
2	4.1	401 (i)	Granular Sub-base with Well Graded Material (Table 400.1) (By mix in place method) For Grading II Material Construction of granular sub-base by providing well graded material, spreading in uniform layers with motor grader on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401								
			as per Annexure I	Cum					123.93 123.93	1,272.29	1,57,675.00
3		401	Supplying & filling of brick bats as per technical specification clause 401								
			GSB in Widening Portion	Cum	0.00	550.00	4.050	0.600	0.00 0.00	1,526.65	0.00
			Net GSB Qty. Required form Grading II Material								
TOTAL COST OF PAVEMENT IN RS. =											1,62,442.00


20.10.2020
Junior Engineer


20.10.2020
Assistant Engineer


20.10.2020
Executive Engineer


Name of work :- RESTORATION OF WORK FROM REHUA ROAD TO
BEHIND BALIKA VIDYAPITH GATE NO.2 (NH-80)

Annexure I

G.S.B

S.NO.	K.M.	N0	Length	Width	Depth	Quan.
1	Q	1	20.50	2.40	0.15	7.38
2		1	7.23	3.00	0.15	3.25
3		1	5.22	3.39	0.15	2.65
4		1	6.55	2.87	0.15	2.82
5		1	8.09	2.90	0.15	3.52
6		1	10.00	2.98	0.15	4.47
7		1	2.65	2.95	0.15	1.17
8		1	2.40	2.80	0.15	1.01
9		1	2.75	3.50	0.15	1.44
10		1	1.50	1.00	0.15	0.23
11		1	2.00	1.75	0.15	0.53
12		1	2.75	2.00	0.15	0.83
13		1	2.70	1.90	0.15	0.77
14		1	2.25	1.90	0.15	0.64
15		1	6.20	2.10	0.15	1.95
16		1	18.50	2.50	0.15	6.94
17		1	8.00	2.30	0.15	2.76
18		1	12.00	2.20	0.15	3.96
19		1	15.00	2.00	0.15	4.50
20		1	13.50	2.70	0.15	5.47
21		1	18.90	3.20	0.15	9.07
22		1	21.60	3.50	0.15	11.34
23		1	26.00	2.90	0.15	11.31
24		1	15.00	3.00	0.15	6.75
25		1	20.00	2.80	0.15	8.40
26		1	25.40	3.10	0.15	11.81
27		1	21.00	2.80	0.15	8.82
			220.32	Total		123.93


20.10.2020
J.E.


20.10.2020
A.E.


20.10.2020