

बिहार सरकार
कार्यपालक अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य प्रमंडल, लखीसराय

पत्रांक:- 1083 (अनु.) लखीसराय/ दिनांक:- 30.09.2020

प्रेषक,

कार्यपालक अभियंता
ग्रामीण कार्य विभाग,
कार्य प्रमंडल लखीसराय।

सेवा में,

नोडल पदाधिकारी
नई अनुरक्षण नीति 2018 (MR 3054)
ग्रामीण कार्य विभाग, बिहार, पटना।

विषय:-

MR 3054/ नई अनुरक्षण नीति 2018 के अन्तर्गत कराये गये निम्न कार्यो को विरुद्ध में
आवंटन उपलब्ध कराने के संबंध में।


महाशय,

उपरोक्त विषय के संबंध में सूचित करना है कि MR 3054/नई अनुरक्षण नीति 2018 के
अन्तर्गत T10 Morma to Khirho एवं Khirho to Patner का Surface कार्य पूर्ण हो चुका है। इस कार्य
के भुगतान हेतु आवंटन की अधियाचना विहित प्रपत्र में भर समर्पित की जाती है।

अतः सादर अनुरोध है कि शीघ्र आवंटन उपलब्ध कराने की कृपा की जाय।

अनु०-यथोक्त।

विश्वासभाजन


30.9.2020.

कार्यपालक अभियंता
ग्रामीण कार्य विभाग,

कार्य प्रमंडल लखीसराय
30-9-2020

RWD Works Division, Lakhisarai

Requisition Format for Scheme Head- MR (3054) Under Bihar Rural Road "New Maintenance Policy 2018" (Initial Rectification and Surface Renewal)

Name of Division:- Jhalpa

S.N	Package No.	Name of Road	Project ID as per MIS	Administrative Approval (A.A) Letter No. & Date	Administrative Approval (A.A)		Agreement Amount (in Lakh)		Agreement No. & Date	Date of Completion as per Agreement	Actual Date of Completion	Value of IRI in MM/KM	Thickness of Bitumen Layer (in MM)	Value of Bitumen Content (in %)	Previous Total Allotted Amount (in Lakh)	Up-to-date expenditure as per MIS (in Lakh)	Requisition against work done (in Lakh)	Remarks
					Length (K.M)	Amount (in Lakh)	Initial Rectification with Surface Renewal (in Lakh)	5 Year Routine Maintenance										
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
1	MR-N/19-20	T10 Morra to Khirho	NEA220001398	3105 & 19.07.2019	2.870	96.72100	54.53132	26.72383	24/SBD/2019-20 & 11.11.2019	10.08.2020	23.09.2020	3316	25	5.02	0	0	54.53132	Surface Completed
2	Lakhisarai/05	Khirho to Patner	NEA220001497	3105 & 19.07.2019	3.350	170.68200	112.33922	29.70697	24/SBD/2019-20 & 11.11.2019	10.08.2020	23.09.2020	2242	25	5.09	0	0	112.33922	Surface Completed

Executive Engineer
RWD Works Division, Lakhisarai

[Signature]
30.9.2020

Name of Road :- Khirho To Patner (Length-3.350 KM)

Date	Time	Section No.	Length in km	Bumps in mm	Speed Rate	OR mm/km	UIV	CATEGORY ROAD	IRI	Latitude	Longitude	Event
30/9/20	11:19:0	50	0.1	250	0	2500	2411	G	3.31	25.17387	86.8163	Normal
30/9/20	11:19:14	50	0.1	220	20.2	2200	2163	G	3.01	25.17372	86.9208	Normal
30/9/20	11:19:14	50	0.1	230	30.3	2300	2245	G	3.11	25.17361	86.1002	Normal
30/9/20	11:19:14	50	0.1	190	30.3	1900	1914	G	2.69	25.17351	86.11245	Normal
30/9/20	11:19:50	50	0.1	220	30.3	2200	2163	G	3.01	25.17348	86.1148	Normal
30/9/20	11:20:0	50	0.1	220	30.3	2200	2163	G	3.01	25.17326	86.13332	Normal
30/9/20	11:20:0	50	0.1	270	30.3	2700	2577	G	3.51	25.17314	86.14007	Normal
30/9/20	11:20:24	50	0.1	200	20.2	2000	1997	G	2.8	25.173	86.15302	Normal
30/9/20	11:20:24	50	0.1	180	30.3	1800	1831	G	2.59	25.17293	86.15858	Normal
30/9/20	11:20:24	50	0.1	250	20.2	2500	2411	G	3.31	25.17287	86.17153	Normal
30/9/20	11:21:0	50	0.1	210	20.2	2100	2080	G	2.9	25.17362	86.17153	Normal
30/9/20	11:21:0	50	0.1	200	20.2	2000	1997	G	2.8	25.17387	86.18013	Normal
30/9/20	11:21:35	50	0.1	190	30.3	1900	1914	G	2.69	25.17386	86.18888	Normal
30/9/20	11:21:35	50	0.1	200	30.3	2000	1997	G	2.8	25.17393	86.2008	Normal
30/9/20	11:21:35	50	0.1	230	30.3	2300	2245	G	3.11	25.17397	86.21212	Normal
30/9/20	11:21:35	50	0.1	210	30.3	2100	2080	G	2.9	25.17412	86.22103	Normal
30/9/20	11:22:0	50	0.1	250	30.3	2500	2411	G	3.31	25.17422	86.23147	Normal
30/9/20	11:22:3	50	0.1	240	30.3	2400	2328	G	3.21	25.1743	86.2409	Normal
30/9/20	11:22:3	50	0.1	200	30.3	2000	1997	G	2.8	25.17435	86.24865	Normal
30/9/20	11:22:38	50	0.1	210	30.3	2100	2080	G	2.9	25.17438	86.26178	Normal
30/9/20	11:22:38	50	0.1	230	30.3	2300	2245	G	3.11	25.17449	86.26935	Normal
30/9/20	11:23:0	50	0.1	230	30.3	2300	2245	G	3.11	25.17454	86.28147	Normal
30/9/20	11:23:0	50	0.1	190	30.3	1900	1914	G	2.69	25.1747	86.29377	Normal
30/9/20	11:23:20	50	0.1	180	30.3	1800	1831	G	2.59	25.17491	86.31043	Curve
30/9/20	11:23:20	50	0.1	230	20.2	2300	2245	G	3.11	25.17491	86.31043	Normal
30/9/20	11:23:55	50	0.1	210	30.3	2100	2080	G	2.9	25.17379	86.31312	Normal
30/9/20	11:23:55	50	0.1	210	40.4	2100	2080	G	2.9	25.17161	86.30908	Normal
30/9/20	11:24:0	50	0.1	350	30.3	3500	3239	G	4.31	25.17041	86.30773	Normal
30/9/20	11:25:6	50	0.1	350	30.3	3500	3239	G	4.31	25.16958	86.30673	Normal
30/9/20	11:25:42	50	0.1	330	20.2	3300	3073	G	4.11	25.16851	86.31125	Normal
30/9/20	11:26:0	50	0.1	400	20.2	4000	3653	G	4.8	25.16802	86.31023	Normal
30/9/20	11:26:0	50	0.056	360	10.1	3600	3322	G	4.41	25.16462	86.30903	Normal

$$Y = 0 * X^2 + 0.828 * X + 341.6$$

$$X = 8200$$

$$Y = 7131$$

(R) RURAL ROAD

Good Average Poor
<4000 4001-5000 >5001

[Signature]
30.9.2020

कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमण्डल, लखीसराय

Name of Customer: M/S Sajwada Ki Loo Canal
 Name of Work/ Road: Kitho To Palner
 Lab Job number:
 Date: 9/30/2020
 Section No. 50


Test Date: 9/30/2020 Road Name: Kitho To Palner
 Machine No: 339 Road Type: (R) RURAL ROAD
 Start S No: Side: Interval:
 Start E No:
 Weather: UV Range: 831 To 5000 1000 mm/Km
 Start Location: 0 Dist Range: 0 To 35 01 * 1000 m
 End Location: 3350 Equation: $Y = 0.0 * X^2 + 0.828 * X + 341.6$

Print Generate Report and Graph

Rdraw Graph

Map View

File: C:\OFFICIAL\Bump Machine\30.09.20\Kitho To Palner\0 to End\300913182ds, Section No.: 50, Egn: $Y = 0.0 * X$
 Name of Customer: Name of Work/ Road: Lab Job number:

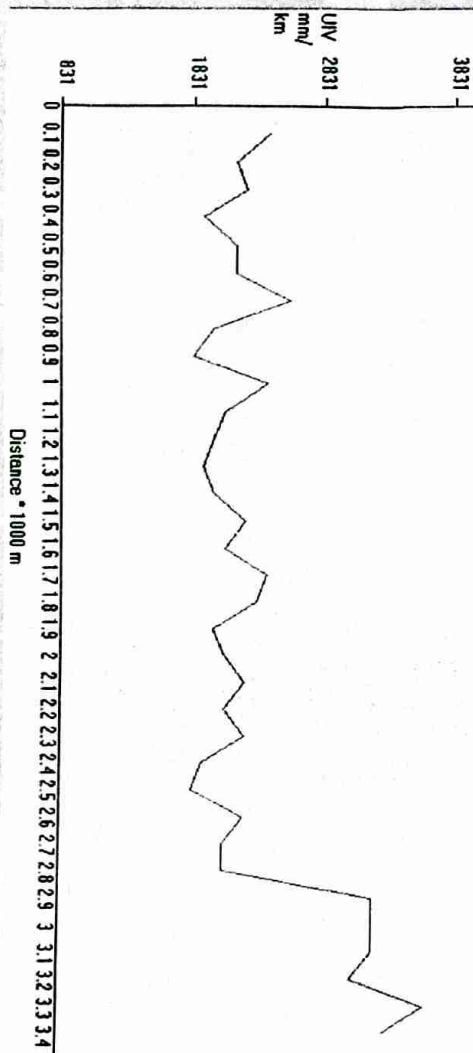

कार्यपालक अभियंता
 ग्रामीण कार्य विभाग
 30.9.2020