

कार्यपालक अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य प्रमंडल,
मुजफ्फरपुर पश्चिम

पत्रांक :- 584/मुजफ्फरपुर

दिनांक :- 7/4/21

प्रेषक:- कार्यपालक अभियंता,
ग्रामीण कार्य विभाग, कार्य प्रमंडल,
मुजफ्फरपुर पश्चिम।

सेवा में,
अपर मुख्य कार्यपालक पदाधिकारी
-सह-सचिव,
ग्रामीण कार्य विभाग, बिहार, पटना।

विषय:- शीर्ष नई अनुरक्षण नीति-2018 (MR) अन्तर्गत वित्तीय वर्ष 2021-22 में व्यय हेतु आवंटन की मांग।

महाशय,

उपर्युक्त विषयक शीर्ष नई अनुरक्षण नीति-2018 (MR) अन्तर्गत वित्तीय वर्ष 2021-22 में व्यय हेतु आवंटन संलग्न विवरणी के अनुसार रु0 77.08273 (सतहत्तर लाख आठ हजार दो सौ तिहत्तर) रुपये मात्र का आवंटन उपलब्ध कराने की कृपा की जाये, ताकि किये गये कार्य का भुगतान किया जा सके।

अनुलग्नक- 1. विहित प्रपत्र में अधियाचना।

विश्वासभाजन

11/8/21

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग, कार्य प्रमंडल,
मुजफ्फरपुर पश्चिम

Requisition Format for Scheme Head - MIR (3054) Under Bihar Rural Road Maintenance Policy-2018 (Initial Rectification and Surface Renewal)

Name of Works Division :- Muzaffarpur West																		
S.N.	Package No.	Name of Road	Project ID as per MIS	Administrative Approval (AA) Letter No. & Date	Administrative Approval (AA)		Agreement Amount (in Lakh)		Agreement No. & Date	Date of Completion as per Agreement	Actual Date of Completion	Value of IRI (in mm/km)	Thickness of Bitumen Layer (in mm)	Value of Bitumen Content in Percentage	Previous Total Allocated Amount (in Lakh)	Up-to-date expenditure as per MIS (in Lakh)	Requisition against work done (in Lakh)	Remarks
					Length (in Km)	Amount (in Lakh)	Initial Rectification with Surface Renewal (in Lakh)	5 Year Routine Maintenance (in Lakh)										
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
1	MR-N/19-20 Muzaffarpur West/30	Pahmaha Chowk Dhala - Bheriya Chowk	NEA220002433	13.12.2019	3.600	99.72600	65.61200	29.25295	230/MBD/2020-21	28.12.2021	Work Complete	1536.000	25mm	5.00	0.00000	0.00000	65.00802	MB Copy Attached
2	MR-N/19-20 Muzaffarpur West/05	Manikpur To Saghanpura	NEA220002560	06.07.2019	8.450	250.87000	143.77100	71.52116	196/MBD/2019-20	03.10.2020	Work Complete	1947.000	25mm	5.00	131.00006	131.00006	12.07471	MB Copy Attached
															131.00006	131.00006	77.08273	


Executive Engineer
RWD Works Division
Muzaffarpur West

Kishor
6/6/19

Name of Road - Pakhnaha Chowk Dhala - bheriya Chowk										
Date	Time	Section No.	Length in km	Bumps in mm	Speed Rate	OR UIV	IRI, CATEGORY ROAD	Latitude	Longitude	Event
30/3/21	13:51:37	69	0.1	120	0	1200	1173 G	1.74	26.23476	85.26751 Curve
30/3/21	13:52:13	69	0.1	120	20.2	1200	1173 G	1.74	26.23405	85.26684 Normal
30/3/21	13:52:13	69	0.1	140	20.2	1400	1371 G	2	26.23323	85.26638 Normal
30/3/21	13:52:48	69	0.1	180	10.1	1800	1766 G	2.51	26.23234	85.26631 Culvert
30/3/21	13:53:0	69	0.1	250	20.2	2500	2458 G	3.37	26.23149	85.26618 Normal
30/3/21	13:53:0	69	0.1	170	30.3	1700	1667 G	2.38	26.23054	85.26609 Normal
30/3/21	13:53:23	69	0.1	290	10.1	2900	2854 G	3.85	26.22962	85.26598 Normal
30/3/21	13:53:23	69	0.1	130	20.2	1300	1272 G	1.87	26.22788	85.26574 Normal
30/3/21	13:54:0	69	0.1	130	30.3	1300	1272 G	1.87	26.22788	85.26554 Normal
30/3/21	13:54:0	69	0.1	200	30.3	2000	1964 G	2.76	26.2269	85.26542 Culvert
30/3/21	13:54:0	69	0.1	140	30.3	1400	1371 G	2	26.22605	85.26532 Normal
30/3/21	13:54:33	69	0.1	110	20.2	1100	1074 G	1.61	26.2251	85.2653 Normal
30/3/21	13:54:33	69	0.1	180	10.1	1800	1766 G	2.51	26.22416	85.26545 Normal
30/3/21	13:55:8	69	0.1	200	10.1	2000	1964 G	2.76	26.22328	85.26512 Normal
30/3/21	13:55:8	69	0.1	70	20.2	700	678 G	1.07	26.22238	85.26497 Normal
30/3/21	13:55:43	69	0.1	130	20.2	1300	1272 G	1.87	26.22144	85.26478 Normal
30/3/21	13:56:0	69	0.1	90	20.2	900	876 G	1.34	26.2205	85.26461 Normal
30/3/21	13:56:19	69	0.1	170	10.1	1700	1667 G	2.38	26.21963	85.26444 Normal
30/3/21	13:56:19	69	0.1	210	20.2	2100	2063 G	2.88	26.2187	85.26428 Normal
30/3/21	13:56:19	69	0.1	120	30.3	1200	1173 G	1.74	26.21782	85.26416 Normal
30/3/21	13:57:0	69	0.1	200	30.3	2000	1964 G	2.76	26.21689	85.26407 Normal
30/3/21	13:57:29	69	0.1	310	20.2	3100	3052 G	4.09	26.21596	85.26396 Normal
30/3/21	13:58:4	69	0.1	110	20.2	1100	1074 G	1.61	26.21518	85.26362 Normal
30/3/21	13:58:4	69	0.1	120	0	1200	1173 G	1.74	26.21374	85.26316 Normal
30/3/21	13:58:4	69	0.1	100	20.2	1000	975 G	1.48	26.21291	85.26288 Normal
30/3/21	13:58:40	69	0.1	160	20.2	1600	1568 G	2.26	26.21198	85.26261 Normal
30/3/21	13:59:0	69	0.1	130	20.2	1300	1272 G	1.87	26.2111	85.26239 Culvert
30/3/21	13:59:15	69	0.1	140	30.3	1400	1371 G	2	26.2102	85.26215 Normal
30/3/21	13:59:15	69	0.1	130	20.2	1300	1272 G	1.87	26.2093	85.2619 Normal
30/3/21	13:59:50	69	0.1	180	20.2	1800	1766 G	2.51	26.2084	85.26157 Curve
30/3/21	14:0:0	69	0.1	150	20.2	1500	1469 G	1.87	26.20839	85.26061 Normal
30/3/21	14:0:0	69	0.1	130	20.2	1300	1272 G	2.13	26.20791	85.25993 Culvert
30/3/21	14:0:25	69	0.1	110	20.2	1100	1074 G	1.87	26.207	85.25971 Normal
30/3/21	14:0:25	69	0.1	80	20.2	800	783 G	1.61	26.20608	85.25939 Normal
30/3/21	14:0:25	69	0.034	80	20.2	2353	2313 G	3.19	26.20579	85.25924 Normal
AVG:-							1536			

(Handwritten signature)

File :H:\Software\Bump Indicator Software\08.12.2020\Dinesh Pandey\Pakhnaha Chowk Dhala - bheriya
 Name of Customer :SARITA PANDEY, Name of Work/ Road :Pakhnaha Chowk Dhala - bheriya Chowk Lab Job

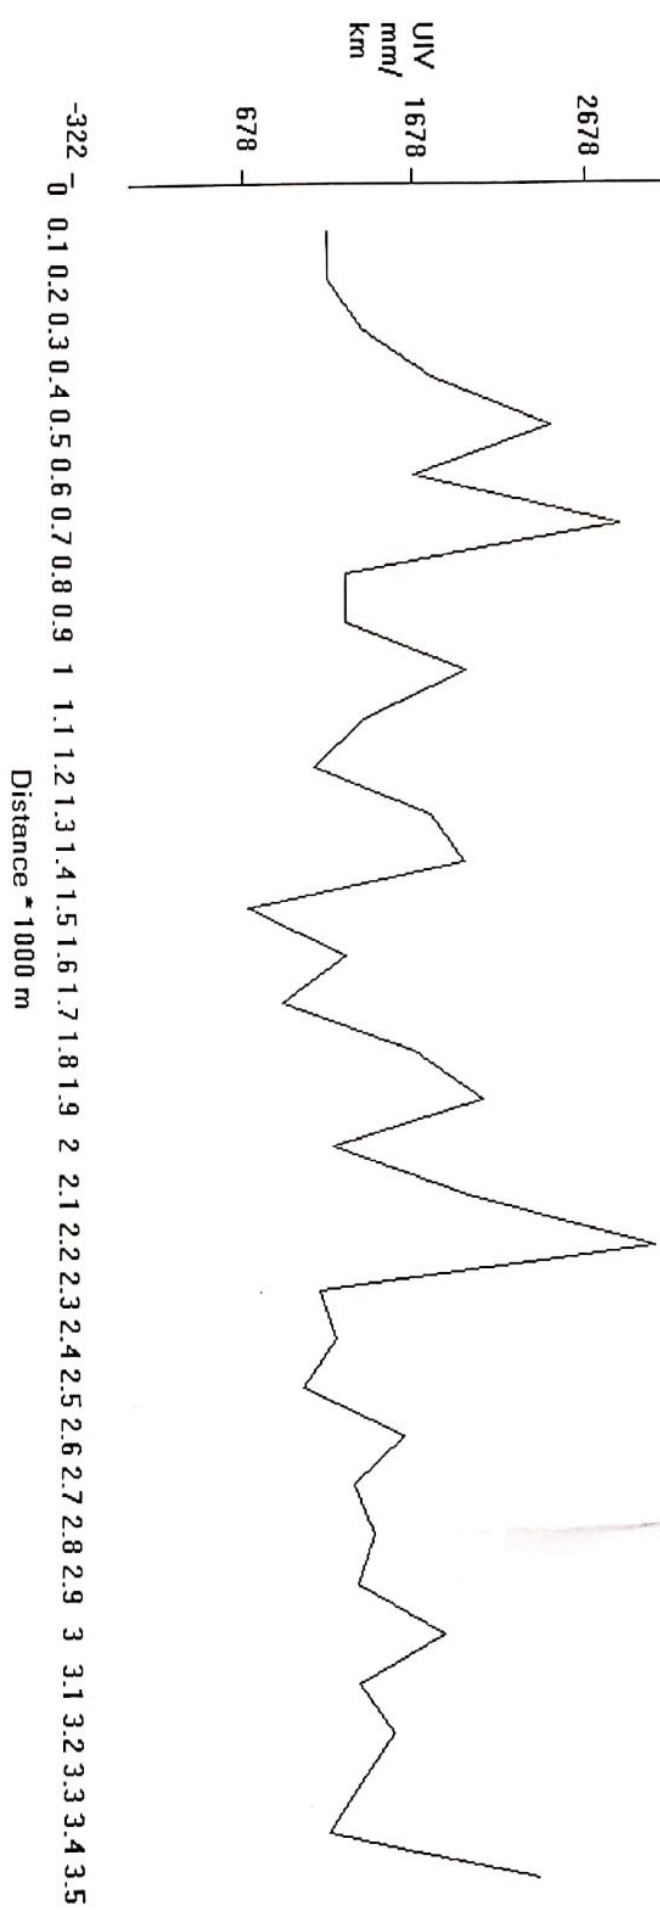

Particulars	Details of actual measurement				Conten. of area
	No.	L.	B.	D.	
First and Final Drill					
ABSTRACT OF COST					
(1/32) clearing and grubbing road land including up-sloping cult. vegetation - do do comp - do vide TMB page no - 02					
	0.720 HA	@	\$1133.96	=	36816.00
(2/33) const ⁿ of sub grade and earthen shoulders with approved materials do - do comp - do vide TMB page no - 02					264775.00
	1511.15	@	175.22	=	264775.00
	1499.60	@	175.22	=	261925.00
(3/34) Const ⁿ of granular sub-base (G.S.B.) 6% providing well graded material - do - do vide TMB page no - 05					118769.00
	62.41 m	@	1903.05	=	118769.00
Continuation					Total = 444844.00
					420360.00

Sch. XLV-Form No. 134

Particulars	Details of actual measurement				Contents of area
	No.	L.	B.	D.	
(21) (52) plastering with sumat					568034.00
mortar (1:4) 15 mm thick					5692938.00
on - do - db roof					
vide T.M.B page no - 24					
80.64 m ² @ 159.42					12856.00
(22) (53) painting two coats					
including primer coat					
on - do - db roof					
vide T.M.B page no - 24					
80.64 m ² @ 88.490					7136.00
					5512922.00

Total Rs	5588186.00
Add 1% Labour cess Rs (+)	55881.86
Add 12% GST - Rs (+)	670570.00
	685551.00
Add 15% Seigniorage	
Fee - Rs (+)	45200.00
	6500802.00
Amount Total Rs	6559739.00

KOI
31/03/2024
DL

28
31/3/24
DL