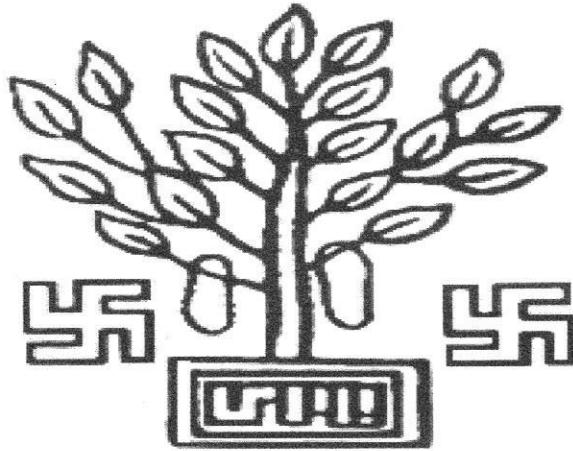


41
24

RURAL WORKS DEPARTMENT



GOVERNMENT OF BIHAR

NAME OF ROAD:- BALUA UDHAMPUR ROAD TO PARTAPGANJ
ROAD VIA VISKARMA CHOUK.

DIVISION:- R.W.D, WORKS DIVISION, TRIVENIGANJ

CIRCLE:- R.W.D, WORK CIRCLE, MADHEPURA

BLOCK:- CHHATAPUR


ESTIMATED COST


~~2014038.00~~


2082754.00

प्रतिवेदन
पथ का नाम :- Balua Udhampur Road to Prathapganj Road via Viskarwan
कार्य का नाम :- Check, पथ की लम्बाई :- 4.2 Km
में बाढ़ से क्षतिग्रस्त भाग में यातायात चालू करने का कार्य।

- संलग्न प्राक्कलन 10.06.2020 को प्रखण्ड में आयी भीषण बाढ़ से क्षतिग्रस्त पथ 200m में बाढ़ क्षतिग्रस्त मरम्मत मद से यातायात चालू करने हेतु तैयार किया गया है जिसकी प्राक्कलित लागत Rs. 3047138 है।
उक्त पथ का निर्माण mmwsy योनान्तर्गत हुआ है एवं योजना अनुरक्षण अवधि में।
पथ के कटे (क्षतिग्रस्त) भाग में आवश्यकता अनुसार Hume Pipe, Bamboo, लोकल बालू एवं Brick Bats देने के बाद यातायात चालू कराया गया है। पथ के विभिन्न हिस्से में कराये गये कार्य का विवरणी स्पष्ट रूप से प्राक्कलन में दर्शाया गया है।
प्राक्कलन मदों का दर वर्तमान अनुसूचित दर के अनुरूप है।


10-11-20
कनीय अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रशाखा,।


सहायक अभियंता,
ग्रामीण कार्य विभाग,
कार्य अवर प्रमण्डल,।


26/11/20
कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल,
Executive Engineer
Rural Works Department
Work Division, Triveniganj

Inspection Report for Flood Damage Work

Date:-.....

1.Name of PIUs:-

2.Name of Block:- CHHATAPUR

3.Name of Road:- Balua Udhampur Road to Prathapganj Road vi
Viskarma chok.

A. For Road

1.Damage Location/Chainage :- 0km to 120km, And Road length = 4km

2.Damage Length :- 200m 200m

3.Nature of Damage :- wash out

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:- L/Sand, brick bats HP 1000mm

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :-

B. For Bridge

1. Damage Location/Chainage:- 0km To 120km

2.Damage Length :- 200m 200m

3.Nature of Damage :- wash out

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:-

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :

Signature of JE/AE/EE

Signature

(Name of Inspector)

Detailed Estimate


Name of Road:

BALUA UDHAMPUR ROAD TO PARTAPGANJ ROAD VIA VISKARMA CHOUK.

| Sl No. | Items of Works | Nos. | L (m) | B (m) | D (m) IN (Av.) | Quantity (m3) |
|--------|---|------|----------|-------------------------|-------------------|---------------|
| 1 | Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge. | | | | | |
| | CH-000 TO 120 M | 1 | 200.00 | $(6.5+5.5+5.25+5.15)/4$ | 2.00 | 2240.00 |
| | CH-120 TO-300 M | 1 | 8.00 | $(5.00+6.00)/2$ | 0.60 | 26.40 |
| | | | | | TOTAL= | 2266.40 |
| | | | | | Total Qty. = | 2266.40 |
| 2 | Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job. | | | | | |
| | BELOW WATER LEVEL | 1 | 30.00 | $(6.00+5.50)/2$ | 0.60 | 103.50 |
| | | 1 | 100.00 | 6.00 | 0.30 | 180.00 |
| | | | | | Total Qty. = | 283.50 |
| 3 | Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job. | | | | | |
| | CH-500 M | 4 | 3.00 | 2.50 | | 30.00 |
| | | | | | Total Qty. = | 30.00 |


JE

RWD SUB DIV- CHHATAPUR


AE

RWD SUB DIV. CHHATAPUR RWD WORKS DIV. TRIVENIGANJ


EE

EXECUTIVE ENGINEER
RWD WORKS DIVISION
TRIVENIGANJ

Abstract of Cost

Name of Work : Estimate for Repairing/Restoration/Making Motorable Roads
Damaged during flood in 2020 in SUPAUL District

Name of Road:

BALUA UDHAMPUR ROAD TO PARTAPGANJ ROAD VIA VISKARMA CHOUK.

Block: CHHATAPUR

District: SUPAUL

Division : RWD, Works Division, TRIVENIGANJ

Circle: RWD, Work Circle, Madhepura

| SI No. | Description | Unit | Quantity (m3) | Rate (Rs) | Amount (Rs) |
|--------|---|-------|---------------|-----------|-------------------|
| 1 | Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge. | | | | |
| | | Cum | 2266.40 | 522.67 | 1184579.29 |
| 2 | Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job. | | | | |
| | | Cum | 283.50 | 1751.13 | 496445.36 |
| 3 | Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job. | | | | |
| | | meter | 30.00 | 3377.00 | 101310.00 |
| | TOTAL AMOUNT = | | | | 1782334.64 |
| | ADD 12.00 %GST= | | | | 213880.16 |
| | ADD 1% L.CESS= | | | | 17823.35 |
| | SEIGNIORAGE FEE= | | | | 68716.00 |
| | SAY TOTAL AMOUNT = | | | | 2014038.15 |

2014038.00

Rs 2082754.00


JE

RWD SUB DIVISION-CHHATAPUR



AE

RWD SUB DIV.
CHHATAPUR

EE

RWD WORKS DIV. TRIVENIGANJ

Technically Approved for Rs- 20,82,754.00
(Rupees twenty Lac Eight two thousand Seven hundred fifty four only)


SE
MADHEPURA
अधीक्षण अधिकारी
ग्रामीण कार्य विभाग
कार्य अंचल, मधेपुरा