


(42) 33

# RURAL WORKS DEPARTMENT

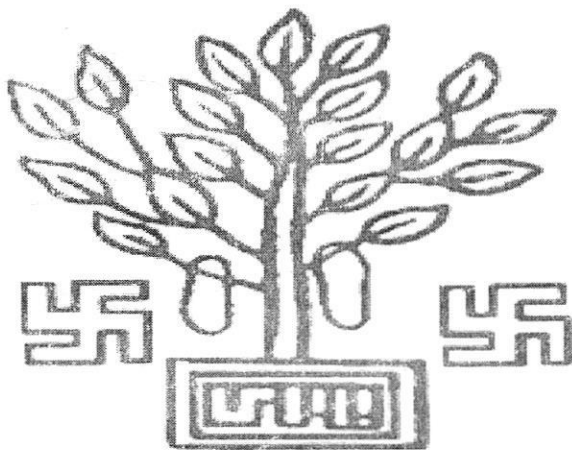

## GOVERNMENT OF BIHAR

NAME OF ROAD:- MADHYA VIDYALAY THUTHI TO ARARIA  
SIMA

DIVISION:- R.W.D, WORKS DIVISION, TRIVENIGANJ

CIRCLE:- R.W.D, WORK CIRCLE, MADHEPURA

BLOCK:- CHHATAPUR

### ESTIMATED COST

1882764.00

1955526.00

प्रतिवेदन

पथ का नाम :- *Madhya Vidyalay Thuthi to Aravniya Simon*  
कार्य का नाम :-

में बाढ़ से क्षतिग्रस्त भाग में यातायात चालू करने का कार्य।

- संलग्न प्राक्कलन 10.06.2020 को प्रखण्ड में आयी भीषण बाढ़ से क्षतिग्रस्त पथ 200m  
में बाढ़ क्षतिग्रस्त मरम्मत मद से यातायात चालू करने हेतु तैयार किया गया है  
जिसकी प्राक्कलित लागत Rs. 1882764 है।  
उक्त पथ का निर्माण वि.वि.स. प्रक्रिया से योजान्तर्गत हुआ है एवं योजना अनुरक्षण  
अवधि में .....। पथ के कटे (क्षतिग्रस्त)  
भाग में आवश्यकता अनुसार Hume Pipe, Bamboo, लोकल बालू एवं Brick Bats देने के बाद  
यातायात चालू कराया गया है। पथ के विभिन्न हिस्से में कराये गये कार्य का विवरणी स्पष्ट  
रूप से प्राक्कलन में दर्शाया गया है।  
प्राक्कलन मदों का दर वर्तमान अनुसूचित दर के अनुरूप है।

*AK*  
15/11/20

कनीय अभियंता,  
ग्रामीण कार्य विभाग,  
कार्य प्रशाखा, .....।

*Sanjiv*  
15/11/21

सहायक अभियंता,  
ग्रामीण कार्य विभाग,  
कार्य अवर प्रमण्डल, .....।

*Sanjiv*  
15/11/20

कार्यपालक अभियंता,  
ग्रामीण कार्य विभाग,  
कार्य प्रमण्डल,  
Rural Works Department  
Work Division Trivenigani

## Inspection Report for Flood Damage Work

Date:-.....

1.Name of PIUs:-

2.Name of Block:- CHHATAPUR

3.Name of Road:- Madhay Vidyalay Thutthi to Araria Sima

### A. For Road

1.Damage Location/Chainage :- CH- 50m

2.Damage Length :- 200m

3.Nature of Damage :- Road washout

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:-

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :-

### B. For Bridge

1. Damage Location/Chainage:- CH:- 50m

2.Damage Length :- 200m

3.Nature of Damage :- Road wash out.

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:-

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :

  
Signature of JE/AE/EE

  
Signature

(Name of Inspector)

# Abstract of Cost

**Name of Work :** Estimate for Repairing/Restoration/Making Motorable Roads Damaged during flood in 2020 in SUPAUL District

**Name of Road:**

**MADHYA VIDYALAY THUTHI TO ARARIA SIMA**

**Block:** CHHATAPUR

**District:** SUPAUL

**Division :** RWD, Works Division, TRIVENIGANJ

**Circle:** RWD, Work Circle, Madhepura

Sl No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.				
		Cum	1442.50	522.67	753951.48
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.				
		Cum	492.00	1751.13	861555.96
3	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.				
		meter	15.00	3377.00	50655.00
	<b>TOTAL AMOUNT =</b>				<b>1666162.44</b>
	<b>ADD 12.00 %GST=</b>				<b>199939.49</b>
	<b>ADD 1% L.CESS=</b>				<b>16661.62</b>
	<b>SAY TOTAL AMOUNT =</b>				<b>1882763.55</b>

*AP*  
15-11-20  
JE

RWD SUB DIV.  
CHHATAPUR

RWD SUB DIVISION-CHHATAPUR

AE

EE

RWD WORKS DIV. TRIVENIGANJ  
Executive Engineer  
Rural Works Department  
Work Division, Triveniganj

SE  
MADHEPURA

Technically approved for Rs 19,55,526=00  
(Rupees Nineteen lac fifty five thousand  
five hundred twenty six only)

11/07/04/21  
अधीक्षण अभिचंता  
ग्रामीण कार्य विभाग  
कार्य अंचल, मधेपुरा


Add S. Fee Rs 72762.00 1882764.00  
1955526.00

## Detailed Estimate

Name of Road:

**MADHYA VIDYALAY THUTHI TO ARARIA SIMA**

SI No.	Items of Works	Nos.	L (m)	B (m)	D (m) IN (Av.)	Quantity (m3)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.					
		1	20.00	(8+6.5)/2	(2.0+3.0+2.50)/3	362.50
		1	200.00	6.00	0.90	1080.00
					TOTAL=	1442.50
					Total Qty =	1442.50
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.					
		1	20.00	(10+8)/2	0.90	162.00
		1	200.00	5.50	0.30	330.00
					Total Qty. =	492.00
3	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.					
		2	3.00	2.50		15.00
					Total Qty. =	15.00

  
 JE 15-11-20

  
 AE 15/11/20

  
 EE 26/11/20

RWD SUB DIV- CHHATAPUR

RWD SUB DIV. CHHATAPUR RWD WORKS DIV. TRIVENIGANJ

Executive Engineer  
 Rural Works Department  
 Work Division Triveniganj