


RURAL WORKS DEPARTMENT GOVT OF BIHAR

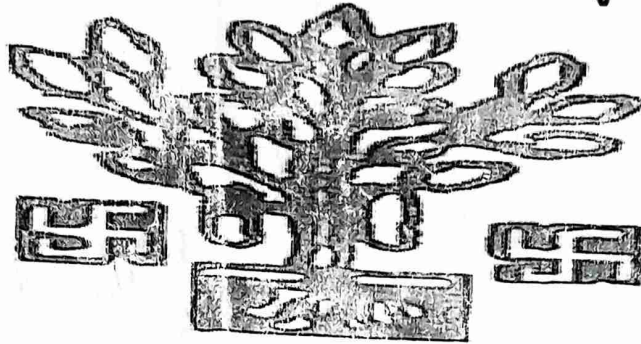

NAME OF WORKS :-

Mirzawa sthit W No-11 Mahadlit Tola
(Barahakurwa W N 9 Satgandi)

BLOCK :-

Triveniganj

FDR

Phase-1

Rs. ~~692176.58~~

7,23,280.00 /-

YEAR(2020-21)

R.W.D., WORKS DIVISION, TRIVENIGANJ

R.W.D., WORKS CIRCLE, MADHEPURA

INSPECTION REPORT FOR Flood Damage Work

Date

1. N/O. Of PIDS - Er. Arjun D. Bhat
2. N/O Block - at Torenigay
3. Name of Road :- Barahakutwa WAI-9 Sitgandi

1. for Road -

1. Damage location/ch.
2. Damage length - 0.45 km
3. Nature of Damage - cutting
4. Details of Restroad work - B. Bat / H.P. local fuel
 - (i) Grubbing / roots
 - (ii) Procedure taken up in Rest.
 - (iii) Restroad length - 15 m

for Bridge

1. MIL

Sub
10/11/20
J.E/AE

Vijay
10.11.2020
AE.

galoi/21
Sg. Arjun
(Name of Inspector)

SUMMARY OF COST ESTIMATE FOR THE PROJECT		
NAME OF ROAD :-	Barahakurwa W N 9 Satgandi	
DISTRICT :-	Supaul	
BLOCK :-	Triveniganj	
Sl. No.	DESCRIPTION	AMOUNT (LAKHS)
1	Embankment	385358.5125
2	Supplying of EC bag, of local sand	227187.13
	SUB TOTAL COST =	612545.64
	ADD GST @12% =	73505.48
	Add Labour cess @ 1% =	6125.46
	TOTAL (RS.) =	692177 ³¹¹⁰⁴

AK
10/11/20
J.E

del
10/11
A.E

7,23,280.00,
del
10/11/20
E.E

EXECUTIVE ENGINEER
RWD WORKS DIVISION
TRIVENIGANJ

S.E

7,23,280.00
Technically approved for Rs ~~6,92,177~~
^{seven}
(Rupees ~~six~~ Lac ~~Ninety two~~ Thousand one hundred
twenty three thousand two ~~seventy seven~~ hundred eighty
^{hundred eighty})

11/11/20

अधीक्षण अभियंता
ग्रामीण कार्य विभाग
कार्य अंचल, मधेपुरा

SE

ESTIMATE FOR REPAIRING / RESTORATION/ MAKING MOTORABLE ROADS DAMAGED DURING FLOOD

NAME OF ROAD :-		Barahakurwa W N 9 Satgandi							
DISTRICT :-		Supaul							
BLOCK :-		Triveniganj							
Sl. No.	DESCRIPTION OF ITEMS	Unit	Nos.	L(m)	B(m)	D(m)	QUANTITY	RATE (Rs.)	AMOUNT (Rs.)
1	Construction of Embankment with Material Obtained from Borrow Pits								
	Construction of embankment with approved materials obtained from excavation for road way in soil using manual means for carrying of cut earth to embankment site 1.5 mt and lead upto 50 m, graded and compacted to meet requirement of table 300.1, 300.2 with lift up to								
	For Ground Level	cum	1	45.00	6.00	2.50	675.00		
	Ground Level to Top	cum	1	45.00	5.00	2.00	450.00		
		cum	1	45.00	5.00	2.00	450.00		
		cum	1	45.00	5.00	1.10	247.50		
		cum	total qty:-				1822.5	211.45	385358.5125

AR
10/11/20
JHCH

Vib
10.11.2020
AR.

AR
30/11/20
EXECUTIVE ENGINEER
RWD WORKS DIVISION
TRIVENIGANJ

Sl. No.	DESCRIPTION OF ITEMS	Unit	Nos.	L(m)	B(m)	D(m)	QUANTITY	RATE (Rs.)	AMOUNT (Rs.)
2	Supplying of EC bag, filling of local sand stitching and placing in position as the direction of Engineer-in-charge.								
		cum	2	45	0.90	2.50	202.50		
	Total No of E C Bags (3.4 cum = 100 Bags) =			202.50	/	0.034	6955.88		
		Each	Say No of Bage :-				5956	38.15	227187.132
							A) SUB TOTAL =		612545.64
							TOTAL COST =		612545.64
	Junior Engineer		Asstt. Engineer				Executive Engineer		

Ag
10/11/20
Jegchh

EXECUTIVE ENGINEER
 RWD WORKS DIVISION
 TRIVENIGANJ