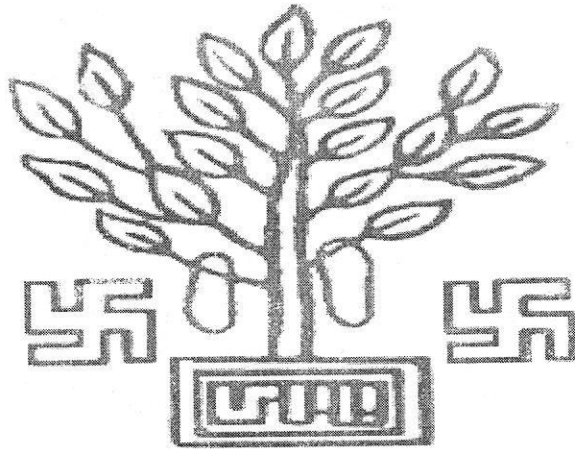


15

RURAL WORKS DEPARTMENT



GOVERNMENT OF BIHAR

NAME OF ROAD:- PWD ROAD DURGASTHAN DEHARIYA TO BELAPATTI

DIVISION:- R.W.D, WORKS DIVISION, TRIVENIGANJ

CIRCLE:- R.W.D, WORK CIRCLE, MADHEPURA

BLOCK:- CHHATAPUR

ESTIMATED COST


Rs 22,30,90/-


~~215498.00~~


प्रतिवेदन
पथ का नाम :- PWD Road Durgasthan Dahriya to Belapatti.
कार्य का नाम :-

में बाढ़ से क्षतिग्रस्त भाग में यातायात चालू करने का कार्य।

- संलग्न प्राक्कलन 10.06.2020 को प्रखण्ड में आयी भीषण बाढ़ से क्षतिग्रस्त पथ
में बाढ़ क्षतिग्रस्त मरम्मति मद से यातायात चालू करने हेतु तैयार किया गया है
जिसकी प्राक्कलित लागत Rs. 215498/- Rs. 223090/- है।
उक्त पथ का निर्माण योनान्तर्गत हुआ है एवं योजना अनुरक्षण
अवधि में। पथ के कटे (क्षतिग्रस्त)
भाग में आवश्यकता अनुसार Hume Pipe, Bamboo, लोकल बालू एवं Brick Bats देने के बाद
यातायात चालू कराया गया है। पथ के विभिन्न हिस्से में कराये गये कार्य का विवरणी स्पष्ट
रूप से प्राक्कलन में दर्शाया गया है।
प्राक्कलन मदों का दर वर्तमान अनुसूचित दर के अनुरूप है।


कनीय अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रशाखा,।


सहायक अभियंता,
ग्रामीण कार्य विभाग,
कार्य अवर प्रमण्डल,।


कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल,।

Inspection Report for Flood Damage Work

Date:-.....

1. Name of PIUs:-

2. Name of Block:- CHHATA PUR

3. Name of Road:- PWD Road Durgasthan Dabraiga to Belapatti

A. For Road

7.78 km

1. Damage Location/Chainage :-

2. Damage Length :- 50m

3. Nature of Damage :- Wash out

4. Details of Restoration Works:-

(i.) Material being used in Restoration Works:- Local sand filling & B/Bate

(ii.) Equipments/Tools being used in Restoration works:- JCB, Grader, Trolley

(iii.) Procedure taken up in Restoration works:- Compacted

(iv.) Restored Length :- 50m

B. For Bridge

1. Damage Location/Chainage:-

2. Damage Length :- 50m

3. Nature of Damage :- Wash out

4. Details of Restoration Works:-

(i.) Material being used in Restoration Works:-

(ii.) Equipments/Tools being used in Restoration works:-

(iii.) Procedure taken up in Restoration works:-

(iv.) Restored Length :

Signature of JE/AE/EE

Signature

(Name of Inspector)

Abstract of Cost

Name of Work : Estimate for Repairing/Restoration/Making Motorable Roads Damaged during flood in 2020 in SUPAUL District

Name of Road:

PWD ROAD DURGASTHAN DEHARIYA TO BELAPATTI

Block: CHHATAPUR

District: SUPAUL

Division : RWD, Works Division, TRIVENIGANJ

Circle: RWD, Work Circle, Madhepura

Roll - 7.78 m

Sl No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.				
		Cum	226.67	522.67	118471.87
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.				
		Cum	41.25	1751.13	72234.11
	TOTAL AMOUNT =				190705.98
	ADD 12.00 %GST=				22884.72
	ADD 1% L.CESS=				1907.06
	SAY TOTAL AMOUNT =				215497.76

d/20/11/20
JE

Am
15/11/20
AE

S. Fee — 215498.00
7592.00
223090.00
26/11/20
EE

RWD SUB DIVISION-CHHATAPUR

RWD SUB DIV.

CHHATAPUR

RWD WORKS DIV. TRIVENIGANJ

A.A. for Rs 223090.00 (Rs. Two lak thirty thousand and Ninety) only.

11/11/20
SE
अभियंता
ग्रामीण कार्य विभाग
कार्य अंचल, मधेपुरा

Detailed Estimate

Name of Road:

PWD ROAD DURGASTHAN DEHARIYA TO BELAPATTI

Sl No.	Items of Works	Nos.	L (m)	B (m)	D (m) IN (Av.)	Quantity (m3)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.					
		1	50.00	(9+8)/2	(0.5+0.6+0.5)/3	226.67
					TOTAL=	226.67
					Total Qty =	226.67
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.					
		1	50.00	(6+5)/2	0.15	41.25
					Total Qty. =	41.25

[Signature]
JE

[Signature]
25/9/20
AE

[Signature]
26/11/20
EE

RWD SUB DIV- CHHATAPUR

RWD SUB DIV. CHHATAPUR RWD WORKS DIV. TRIVENIGANJ