


32 4

RURAL WORKS DEPARTMENT

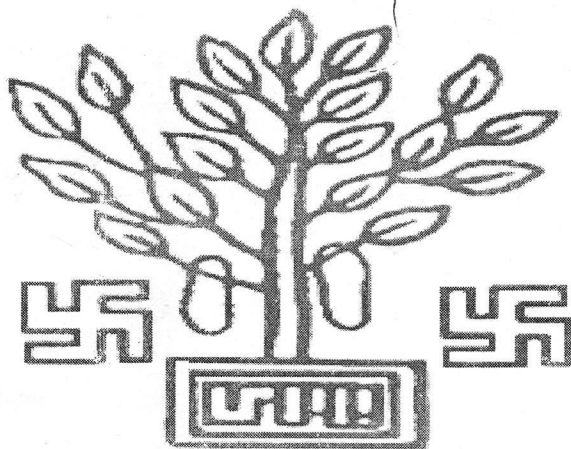

GOVERNMENT OF BIHAR

NAME OF ROAD:- L0 53. T01 TO NARAHIIYA (VR8)

DIVISION:- R.W.D, WORKS DIVISION, TRIVENIGANJ

CIRCLE:- R.W.D, WORK CIRCLE, MADHEPURA

BLOCK:- CHHATAPUR

ESTIMATED COST → 3-75,800

Rs - 3,85,700 = 00

प्रतिवेदन

पथ का नाम :-

कार्य का नाम :-

में बाढ़ से क्षतिग्रस्त भाग में यातायात चालू करने का कार्य।

संलग्न प्राक्कलन 10.06.2020 को प्रखण्ड में आयी भीषण बाढ़ से क्षतिग्रस्त

..... में बाढ़ क्षतिग्रस्त मरम्मत मद से यातायात चालू करने हेतु तैयार किया गया है

जिसकी प्राक्कलित लागत 3,77,548/- 3,85,700/- है।

उक्त पथ का निर्माण प.म. 6.3.21 योनान्तर्गत हुआ है एवं योजना अनुरक्षण

अवधि में

पथ के कटे (क्षतिग्रस्त)

भाग में आवश्यकता अनुसार Hume Pipe, Bamboo, लोकल बालू एवं Brick Bats देने के बाद यातायात चालू कराया गया है। पथ के विभिन्न हिस्से में कराये गये कार्य का विवरणी स्पष्ट रूप से प्राक्कलन में दर्शाया गया है।

प्राक्कलन मदों का दर वर्तमान अनुसूचित दर के अनुरूप है।

1/7/20
कनीय अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रशाखा,

1/7/20
सहायक अभियंता,
ग्रामीण कार्य विभाग,
कार्य अवर प्रमण्डल,

1/7/20
कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल,

Inspection Report for Flood Damage Work

Date:-.....

1. Name of PIUs:-

EE R.W.D. DIV. Torbengur

2. Name of Block:-

Chhataypur

3. Name of Road:-

h 52. Tol to Narhaya. (VR 8)

A. For Road

1. Damage Location/Chainage :-

h- 2.585 m

2. Damage Length :-

0.068 m

3. Nature of Damage :-

Probably cutting of road.

4. Details of Restoration Works:-

earth, boulders, L/Ss and what.

(i.) Material being used in Restoration Works:-

(ii.) Equipments/Tools being used in Restoration works:-

Tractor, Trolley, JCB.

(iii.) Procedure taken up in Restoration works:-

Completed.

(iv.) Restored Length :-

0.068 m

B. For Bridge

1. Damage Location/Chainage:-

2. Damage Length :-

3. Nature of Damage :-

4. Details of Restoration Works:-

(i.) Material being used in Restoration Works:-

(ii.) Equipments/Tools being used in Restoration works:-

(iii.) Procedure taken up in Restoration works:-

(iv.) Restored Length :

Signature of JE/AE/EE

24/10/20
AR

Signature

22/11/21

(Name of Inspector)

24/10/20
05

Abstract of Cost

Name of Work : Estimate for Repairing/Restoration/Making Motorable Roads
Damaged during flood in 2020 in SUPAUL District

Name of Road:

LO 53. T01 TO NARAHYA (VR8)

Block: CHHATAPUR

District: SUPAUL

Division : RWD, Works Division, TRIVENIGANJ

Circle: RWD, Work Circle, Madhepura

Sl No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.				
		Cum	131.23	522.67	68590.64
2	Labour for cutting 62mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer-in-Charge.				
		Mtr.	396.00	26.40	10454.40
3	Labour for fitting & fixing 62mm to 75mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails etc all complete job as per specification & direction of Engineer-in-Charge.				
		Mtr.	180.00	4.70	846.00
4	Supplying of EC bag, filling of local sand, stitching and placing in position as per the direction of Engineer-in-charge.				
		Per 100 Bags	51.65	3113.40	160801.47
5.	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.				
		Cum	43.75	1751.13	76611.94
6.	Supply and Carriage of bamboo work		96.0	171=40	16416.00
	ADD 1% L.CESS=				3173.04
	ADD 12.00 %GST=				38076.53
	SAY TOTAL AMOUNT =				358554.02

20/10/20

JE

RWD SUB DIVISION-CHHATAPUR

Add 5 Fee

20/10/20

AE

RWD SUB DIV.
CHHATAPUR

8588.00
377,540.00
385736.00
385700.00

RWD WORKS DIV. TRIVENIGANJ

T.A. for Rs. Three lac, eighty five thousand, seven hundred) only.

अधीक्षण अभियंता
ग्रामीण कार्य विभाग
कार्य अंचल, मधेपुरा

SE
MADHEPURA

Detailed Estimate

Name of Road:

L0 53. T01 TO NARAHYA (VR8)

Sl No.	Items of Works	Nos.	L (m)	B (m)	D (m) IN (Av.)	Quantity (m ³)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.					
		2	2.10	1.5	3.50	22.05
		LS	5.10	(1+2.5)/2	4.50	40.16
			3.10	(3.5+1)/2	4.25	29.64
		RS	3.50	(3.5+1)/2	5.00	39.38
			3.50	(4+1)/2	5.25	45.94
					TOTAL=	131.23
					Total Qty =	131.23
2	Labour for cutting 62mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer-in-Charge.					
		2	22		9.00	396.00
					Total Qty =	396.00
3	Labour for fitting & fixing 62mm to 75mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails etc all complete job as per specification & direction of Engineer-in-Charge.					
		2	15		6.00	180.00
					Total Qty =	180.00
4	Supplying of EC bag, filling of local sand, stitching and placing in position as per the direction of Engineer-in-charge.					
		1	5.50	2.50	4.50	61.88
		1	3.50	2.50	4.50	39.38
		1	5.00	(1.5+2.5)/2	4.50	45.00
					TOTAL=	146.25
					Total No. of EC Bags =(146.25X35.315)	5164.82
					SAY NO OF BAGE=	5165
					NO OF BAGS/100=	52
5	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.	1x 6.10 1x 31.10	4.50 5.10	0.15 m 0.25 m	4.12 m ³ 39.63 m ³	
			3.50	(1.5+3.5)/2	2.50	43.75
6.	supply of bamboos with carriage.	(396+180)/6 = 96 No				Total Qty. = 43.75

Total Qty = 96.0 No.

JE 20/10/20

AE 00/10/20

EE 20/11