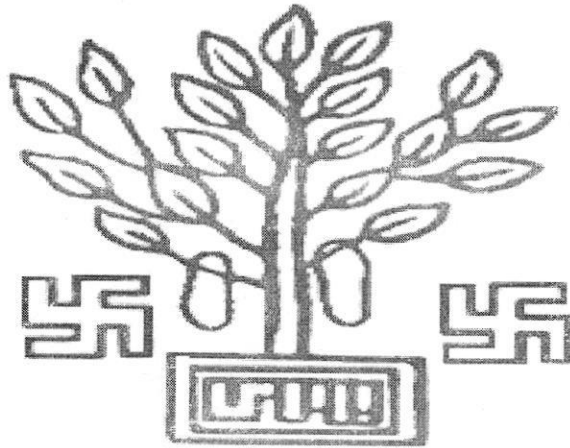


(8)
26

RURAL WORKS DEPARTMENT



GOVERNMENT OF BIHAR

NAME OF ROAD:- PARDHANMANTRI ROAD BALUA RAM LAKHAN TO
SHW PURANDEV RAM VIA KALAGOVIND MANDAL
TOLA.

DIVISION:- R.W.D, WORKS DIVISION, TRIVENIGANJ

CIRCLE:- R.W.D, WORK CIRCLE, MADHEPURA

BLOCK:- CHHATAPUR

ESTIMATED COST


1833004.00
1909743.00


प्रतिवेदन


पथ का नाम :- प्रधानमंत्री सड़क. रामलखन. SHW. पुरनदेव राम भाया कालागोविन्दपुर
कार्य का नाम :- मजदूर टीला

में बाढ़ से क्षतिग्रस्त भाग में यातायात चालू करने का कार्य।

संलग्न प्राक्कलन 10.06.2020 को प्रखण्ड में आयी भीषण बाढ़ से क्षतिग्रस्त पथ, 50M
में बाढ़ क्षतिग्रस्त मरम्मत मद से यातायात चालू करने हेतु तैयार किया गया है
जिसकी प्राक्कलित लागत Rs. 1833004 है।
उक्त पथ का निर्माण M.M.W.S.Y. योनान्तर्गत हुआ है एवं योजना अनुरक्षण
अवधि में।
पथ के कटे (क्षतिग्रस्त)
भाग में आवश्यकता अनुसार Hume Pipe, Bamboo, लोकल बालू एवं Brick Bats देने के बाद
यातायात चालू कराया गया है। पथ के विभिन्न हिस्से में कराये गये कार्य का विवरणी स्पष्ट
रूप से प्राक्कलन में दर्शाया गया है।
प्राक्कलन मदों का दर वर्तमान अनुसूचित दर के अनुरूप है।


10-11-20
कनीय अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रशाखा,।


10-11-20
सहायक अभियंता,
ग्रामीण कार्य विभाग,
कार्य अवर प्रमण्डल,।


10-11-20
कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल,
Rural Works Department
Work Division, Trivenigani

Inspection Report for Flood Damage Work

Date:-.....

1.Name of PIUs:-

2.Name of Block:- CHHATAPUR

3.Name of Road:- PRADHAN MANTRI ROAD BALUA RAM LAKHATO SHW PURHDEW
RAM VIA KALAGOBIND MANDAL TOLA

A. For Road

1.Damage Location/Chainage :- 2nd km, And Road Length - 2.5km

2.Damage Length :- 50m

3.Nature of Damage :- Wash out

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:-

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :-

B. For Bridge

1. Damage Location/Chainage:- 2nd km

2.Damage Length :- 50m

3.Nature of Damage :- Wash out


4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:-

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :


Signature of JE/AE/EE


Signature

(Name of Inspector)

Abstract of Cost

Name of Work : Estimate for Repairing/Restoration/Making Motorable Roads
Damaged during flood in 2020 in SUPAUL District

Name of Road:

PARDHANMANTRI ROAD BALUA RAM LAKHAN TO SHW PURANDEV RAM VIA KALAGOVIND MANDAL TOLA.

Block: CHHATAPUR

District: SUPAUL

Division : RWD, Works Division, TRIVENIGANJ

Circle: RWD, Work Circle, Madhepura

Sl No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.				
		Cum	1025.92	522.67	536217.61
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.				
		Cum	585.00	1751.13	1024411.05
3	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.				
		meter	22.50	3377.00	75982.50
	TOTAL AMOUNT =				1636611.16
	ADD 12.00 %GST=				196393.34
	ADD 1 % L.CESS=				16366.11
	SAY TOTAL AMOUNT =				1833004.50

1833004.00

R 1909743

26/11/20

EE

AE

RWD SUB DIV.
CHHATAPUR

RWD SUB DIVISION-CHHATAPUR

RWD WORKS DIV. TRIVENIGANJ

Executive Engineer
Rural Works Department
Work Division, Trivenigani

SE
MADHEPURA

Technically approved for
Rs 19,09,743=00
(Rupees Nineteen Lac nine thousand seven
hundred forty three only)

11/02/2021

अधीक्षण अभियंता
ग्रामीण कार्य विभाग
कार्य अंचल, रा.

Detailed Estimate

Name of Road:

**PARDHANMANTRI ROAD BALUA RAM LAKHAN TO SHW PURANDEV RAM VIA
KALAGOVIND MANDAL TOLA.**

Sl No.	Items of Works	Nos.	L (m)	B (m)	D (m) IN (Av.)	Quantity (m3)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.					
		1	30.00	(9+8+6.3)/3	1.40	325.92
		1	50.00	(8+6)/2	2.00	700.00
					TOTAL=	1025.92
					Total Qty. =	1025.92
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.					
		1	40.00	(11+9)/2	0.90	360.00
		1	50.00	(8+7)/2	0.60	225.00
					Total Qty. =	585.00
3	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.					
		3	3.00	2.50		22.50
					Total Qty. =	22.50

Ar
10-11-20
JE

Ar
21/11/20
AE

Ar
26/11/20
EE

RWD SUB DIV- CHHATAPUR

RWD SUB DIV. CHHATAPUR RWD WORKS DIV. TRIVENIGANJ

Executive Engineer
Rural Works Department
RWD, CHHATAPUR