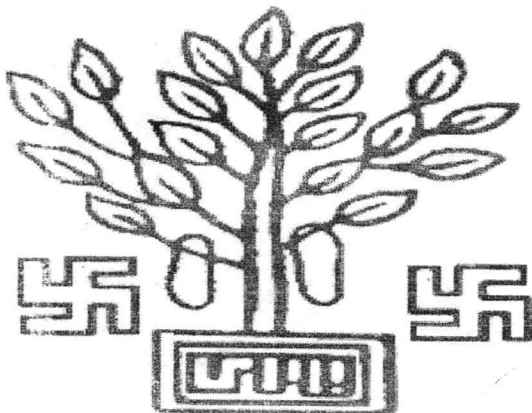


# RURAL WORKS DEPARTMENT



## GOVERNMENT OF BIHAR

NAME OF ROAD:- **L033 T01 TO LAXSHMIPUR(VR9)**

DIVISION:- **R.W.D, WORKS DIVISION, TRIVENIGANJ**

CIRCLE:- **R.W.D, WORK CIRCLE, MADHEPURA**

BLOCK:- **CHHATAPUR**

ESTIMATED COST - **1430200.00**

---

## प्रतिवेदन


पथ का नाम:— **L033 T01 TO LAXSHMIPUR(VR9)**


कार्य का नाम:— बाढ़ से क्षतिग्रस्त भाग में यातायात चालम करने का कार्य।


संलग्न प्राक्कलन **1430200.00** को प्रखण्ड में आयी भीषण से क्षतिग्रस्त 1 कि० मी० में बाढ़ क्षतिग्रस्त मरम्मति मद से यातायात चालू करने हेतु तैयार किया गया है। उक्त पथ का निर्माण MMGSY. योनान्तर्गत हुआ है एवं योजना अनुरक्षण अवधि में.....।

पथ के कटे (क्षतिग्रस्त) भाग में आवश्यकता अनुसार Hume Pipe, लोकल बालू एवं Brick Bats प्राक्कलन में दर्शाया गया है।

प्राक्कलन मदों का दर वर्तमान अनुसूचित दर के अनुरूप है।

  
कनीय अभियंता,  
ग्रामीण कार्य विभाग,  
कार्य प्रशाखा.....।

  
सहायक अभियंता,  
ग्रामीण कार्य विभाग,  
कार्य अवर प्रमण्डल.....।

  
कार्यपालक अभियंता,  
ग्रामीण कार्य विभाग,  
कार्य प्रमण्डल,.....।

# Inspection Report for Flood Damage Work

Date:-.....

1.Name of PIUs:-

EE RWD CO. DIV Tribenjanj

2.Name of Block:-

Chhotapuri

3.Name of Road:-

LC33 - To/Plaxmipond (R-9)

A. For Road

L- 4.42 km

1.Damage Location/Chainage :-

26011

L- 3.78 km

2.Damage Length :-

0.46 km

3.Nature of Damage :-

Partially & a part of road.

4.Details of Restoration Works:-

local sand filling.

(i.)Material being used in Restoration Works:-

Local sand.

(ii.)Equipments/Tools being used in Restoration works:-

JCB, Tractor, Tooling.

(iii.)Procedure taken up in Restoration works:-

Completed.

(iv.)Restored Length :-

0.96 km

B. For Bridge

1. Damage Location/Chainage:-

2.Damage Length :-

3.Nature of Damage :-

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:-

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :

Signature of JE/AE/EE

Signature of JE/AE/EE

Signature

(Name of Inspector)

**DETAILS OF ESTIMATE FOR RESTORATION OF  
Abstract of Cost**

Division:- RWD triveniganj

BLOCK :- CHHATAPUR

Name of Road :

**L033 T01 TO LAXSHMIPUR(VR9)**

Sub division:-Chhatapur

PANCHAYAT :-

Length of Breach

*Road - 4.42 km*

Yr. 2020-21

| Sl. No./<br>item no. | Item of works                                                                   | Quantity | Unit    | Rate   | Amount     |
|----------------------|---------------------------------------------------------------------------------|----------|---------|--------|------------|
| 1                    | Filling of local sand obtained from river<br>bed Watering & ramming all com.job | 2408.05  | per cum | 522.67 | 1258615.49 |
|                      |                                                                                 |          |         |        | 1258615.49 |
|                      |                                                                                 |          |         |        | 1258615.49 |

S.Fee

**7946.00**

Add 12% GST

**151033.86**

Add 1% Labour cess total item

**12586.15**

**Total**

**1430181.51**

SAY Rs

**1430200.00**

*1/10/20*

Junior Engine  
Chhatapur

*1/10/20*

S D O  
Rural Works Sub division  
Chhatapur

*1/10/20*

Executive Engineer  
Rural Works division  
Triveniganj

*T.A. for Rs - 14,30,200/-*

*(Fourteen Lacs, thirty thousand two hundred) only.*

*1/07/21*

अधीक्षक अभियंता  
ग्रामीण कार्य विभाग  
कार्य अंचल, मधेपुरा

# **DETAIL OF ESTIMATE FOR RESTORATION OF L033 T01 TO LAXSHMIPUR(VR9)**

Division:- RWD triveniganj

BLOCK :- CHHATAPUR

Sub division:-Chhatapur

Length of Breach

Yr. 2020-21

| Sl. No./ item | Item of works                                                                | Nos. | L     | B               | H                     | Quantity  |
|---------------|------------------------------------------------------------------------------|------|-------|-----------------|-----------------------|-----------|
| 1             | Filling of local sand obtained from river bed Watering & ramming all com.job | 2    | 50.0m | $(3.50+4.30)/2$ | 1.00m                 | 390.0 cum |
|               |                                                                              | 2    | 30.0m | 1.80m           | 2.55m                 | 275.40    |
|               |                                                                              | 1    | 100   | $(7.65+6.50)/2$ | $(1.5+1.6+1.7+1.5)/4$ | 1114.32   |
|               |                                                                              | 1    | 50    | $(7.5+5.5)/2$   | $(1.6+2.5+1.7)/3$     | 628.33    |
|               |                                                                              |      |       |                 | Total=                | 2408.05   |
|               |                                                                              |      |       |                 |                       |           |

*[Signature]*  
Junior Engi

*[Signature]*  
S D O  
Rural Works Sub division  
Chhatapur

*[Signature]*  
Executive Engineer  
Rural Works division  
Triveniganj