


17

RURAL WORKS DEPARTMENT

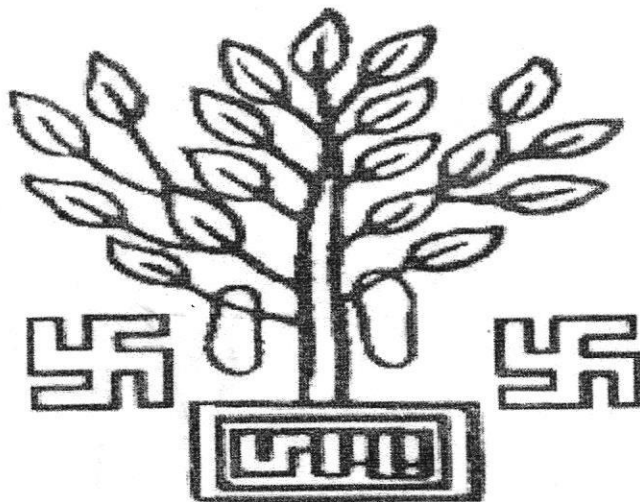

GOVERNMENT OF BIHAR

NAME OF ROAD:- CHATAPUR BUS STAND PASCHIM BAKHO TOLA AND
PASWAN TOLA HOTE HUA GENDA NADI EVAN MIRCHAIYA
NADI PAR KARTE HUA HARRIPATTI SH TAK

DIVISION:- R.W.D, WORKS DIVISION, TRIVENIGANJ

CIRCLE:- R.W.D, WORK CIRCLE, MADHEPURA

BLOCK:- CHHATAPUR

ESTIMATED COST - Rs. 3222000.00

प्रतिवेदन

पथ का नाम:- छातापुर बस स्टैंड से पश्चिम बक्खो टोला एवं पासवान टोला होते हुए गहरा नदी एवं मिरचईया नदी पार करते हुए हरिहरपट्टी एस0 सच0 तक

कार्य का नाम:- बाढ़ से क्षतिग्रस्त भाग में यातायात चालम करने का कार्य।


संलग्न प्राक्कलन 3222000.00 को प्रखण्ड में आयी भीषण से क्षतिग्रस्त 1.86 कि० मी० में बाढ़ क्षतिग्रस्त मरम्मति मद से यातायात चालू करने हेतु तैयार किया गया है। उक्त पथ का निर्माण MMGSY. योनान्तर्गत हुआ है एवं योजना अनुसूक्षण अवधि में.....।

पथ के कटे (क्षतिग्रस्त) भाग में आवश्यकता अनुसार Hume Pipe, लोकल बालू एवं Brick Bats प्राक्कलन में दर्शाया गया है।

प्राक्कलन मदों का दर वर्तमान अनुसूचित दर के अनुरूप है।


कनीय अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रशाखा.....।


सहायक अभियंता,
ग्रामीण कार्य विभाग,
कार्य अवर प्रमण्डलए.....।


कार्यपालक अभियंता
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल,.....।

Inspection Report for Flood Damage Work

Date:-.....

1.Name of PIUs:-

EE RUD Works DIV. Torbenjari

2.Name of Block:-

Chhatapuri.

3.Name of Road:-

Chhatapuri bus stand near Khanna Bakhtole, and road
Daskate and Hanishatti, Gada Tak.

A. For Road

1.Damage Location/Chainage :-

2.Damage Length

:- 0.164 km.

3.Nature of Damage

:- water cut road & partially cutting.

4.Details of Restoration Works:-

HP. L/Sand, B/Bat

(i.)Material being used in Restoration Works:-

HP. L/Sand. B/Bat.

(ii.)Equipments/Tools being used in Restoration works:-

JCB, Water Trolley,

(iii.)Procedure taken up in Restoration works:-

crushed.

(iv.)Restored Length :-

0.164 km

B. For Bridge

1. Damage Location/Chainage:-

2.Damage Length

3.Nature of Damage

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:-

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :

28/11/20
Signature of JE/AE/EE

Signature 28/11/2021

(Name of Inspector)

ABSTRACT OF COST

DETAILS OF ESTIMATE FOR REPAIR /MOTARABLE WORK

ROAD AT ROAD-

CHATAPUR BUS STAND PASCHIM BAKHO TOLA AND PASWAN TOLA HOTE HUA GENDA NADI EVAN
MIRCHAIYA NADI PAR KARTE HUA HARRIPATTI SH TAK (PART-B)

AS PER ACTUAL WORK DONE

Division:- RWD triveniganj

BLOCK :- CHHATAPUR

Sub division:-Chhatapur

Yr. 2020-21

Sl. No./ item no.	Item of works		
1	PART -A		566100.00
2	PART-B		2655900.00
	TOTAL Amount =	Rs.	3222000.00

[Signature]
22/01/20
Junior Engineer
Chhatapur

[Signature]
22/01/20
S D O
Rural Works Sub division
Chhatapur

[Signature]
26/11/20
Executive Engineer
Rural Works division
Triveniganj

AA. for Rs 32,22,000/- (Rs. thirty two lac -
Twenty two thousand only)

SE
MADHEPURA

[Signature]
11/01/21
अधीक्षक अभियंता
ग्रामीण कार्य विभाग
कार्य अंचल, मधेपुरा

Abstract of Cost

Name of Work : Estimate for Repairing/Restoration/Making Motorable Roads
Damaged during flood in 2020 in SUPAUL District

Name of Road:

CHATAPUR BUS STAND PASCHIM BAKHO TOLA AND PASWAN TOLA HOTE HUA GENDA NADI EVAN MIRCHAIYA NADI PAR KARTE
HUA HARRIPATTI SH TAK (PART-A)

Block: CHHATAPUR

District: SUPAUL

Divison : RWD, Works Division, TRIVENIGANJ

Circle: RWD, Work Circle, Madhepura

R. L. - 4. 0566

Sl No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.				
		Cum	363.375	522.67	189925.00
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.				
		Cum	138.00	1751.13	241655.94
3	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.				
		meter	15.00	3377.00	50655.00
	TOTAL AMOUNT =				482235.00
	ADD 1.00 %LABOUR CESS=				4822.00
	ADD 12.00 %GST=				57868.00
	TOTAL AMOUNT =				544925.00

JE
20/11/20

RWD SUB DIVISION-CHHATAPUR

S Fee =
Total =
Say Total =
AE
20/11/20

RWD SUB DIV.
CHHATAPUR

21148.00
566073.00
566100.00
EE
20/11/20

RWD WORKS DIV. TRIVENIGANJ

SE
MADHEPURA

Detailed Estimate

Name of Road:

**CHATAPUR BUS STAND PASCHIM BAKHO TOLA AND PASWAN TOLA HOTE HUA GENDA
NADI EVAN MIRCHAIYA NADI PAR KARTE HUA HARRIPATTI SH TAK (PART-A)**

Sl No.	Items of Works	Nos.	L (m)	B (m)	D IN (Av.) (m)	Quantity (m3)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.					
		1	13.00	(7.5+6.0)/2	2.50	219.375
		1	10.00	(7.5+8.5)/2	1.80	144.00
					TOTAL=	363.375
					Total Qty =	363.375
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.					
		1	23.00	(5.5+6.5)/2	1.00	138.00
					Total Qty. =	138.00
3	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.					
		2	3.00	2.50		15.00
					Total Qty. =	15.00


JE

RWD SUB DIV- CHHATAPUR


AE

RWD SUB DIV. CHHATAPUR


EE

RWD WORKS DIV. TRIVENIGANJ

Abstract of Cost

Name of Work : Estimate for Repairing/Restoration/Making Motorable Roads
Damaged during flood in 2020 in SUPAUL District

Part-B

Name of Road:

STAND PASCHIM BAKHO TOLA AND PASWAN TOLA HOTE HUA GENDA NADI EVAN MIRCHAIYA NADI PAR KARTE HUA HARRIPATTI :

Block: CHHATAPUR

District: SUPAUL

Divison : RWD, Works Division, TRIVENIGANJ

Circle: RWD, Work Circle, Madhepura

Handwritten: Road No. 41856 A

Sl No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.				
		Cum	868.36	522.67	453864.85
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.	Cum	980.73	1751.13	1717386.00
3	Supply & S.FF NP3 1000 mm HP	M	22.50	3377.00	75982.50
	TOTAL AMOUNT =				2247233.00
	ADD 12.00 %GST=				269668.00
	ADD 1.00 %L.CESS=				22472.00
	TOTAL AMOUNT =				2539373.00

S Fee= 116569.00
Total Amount= 2655942.00
Say Rs= 2655900.00

Handwritten signature
JE

Handwritten signature
AE

Handwritten signature
EE

RWD SUB DIVISION-CHHATAPUR

RWD SUB DIV.
CHHATAPUR

RWD WORKS DIV. TRIVENIGANJ

SE
MADHEPURA

Detailed Estimate

Name of Road:

**CHATAPUR BUS STAND PASCHIM BAKHO TOLA AND PASWAN TOLA HOTE HUA GENDA
NADI EVAN MIRCHAIYA NADI PAR KARTE HUA HARRIPATTI SH TAK (PART-B)**

Sl.No.	Items of Works	Nos.	L (m)	B (m)	D (m) IN (Av.)	Quantity (m3)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.					
		1	29.00	(5.5+8.5)/2	(1.5+2.5+5.5+3+2.20+1.60)/6	551.48
	SIDE	1	30.00	(2+2.5)/2	1.50	101.25
		1	42.00	2.5	(1.5+1)/2	131.25
	NEAR RCC CD	2	3.50	(4.5+3)/2	(1+2)/2	39.38
		2	5.00	(1+2)/2	(4+2)/2	45.00
					TOTAL=	868.36
					Total Qty =	868.36
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.					
		1	11.00	(8+9)/2	(1.5+1.75+1.55)/3	149.60
		1	29.00	(5+8)/2	(2.75+2.10+1.20+2.65+1.56+1.20)/6	360.04
		1	40.10	(5+8)/3	(2.75+2.10+1.20+2.65+1.56+1.20)/6	497.84
					Total Qty. =	1007.48
	Less- 22.5 x 1.189= 26.75				Net Qty =	980.73
3	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.					
		3.0	3.00	2.50		22.5
					Total Qty. =	22.5


JE


AE


EE

RWD SUB DIV- CHHATAPUR

RWD SUB DIV. CHHATAPUR

RWD WORKS DIV. TRIVENIGANJ