


45

5

# RURAL WORKS DEPARTMENT

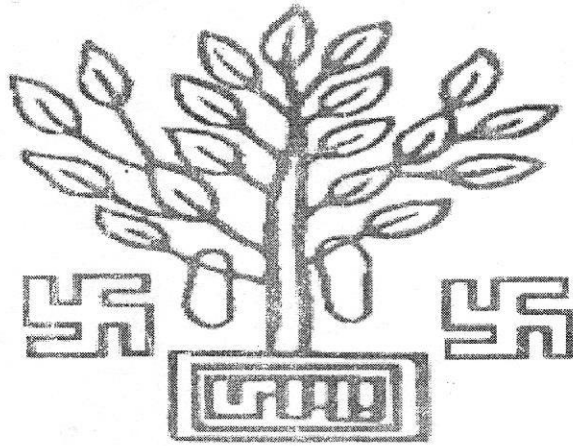

## GOVERNMENT OF BIHAR

NAME OF ROAD:-

PRADHANMANRTI MATIYARI TO  
BRAHMOTRA MUSHARI TOLA

DIVISION:-

R.W.D, WORKS DIVISION, TRIVENIGANJ

CIRCLE:-

R.W.D, WORK CIRCLE, MADHEPURA

BLOCK:-

CHHATAPUR

### ESTIMATED COST


1946248.00

Rs 2016022.00

प्रतिवेदन

पथ का नाम :- Roadhamantari Matiyari to Boornotora Mushritola  
कार्य का नाम :- पथ की स्पर्श = 3km  
में बाढ़ से क्षतिग्रस्त भाग में यातायात चालू करने का कार्य।

- संलग्न प्राक्कलन 10.06.2020 को प्रखण्ड में आयी भीषण बाढ़ से क्षतिग्रस्त 11.180m  
में बाढ़ क्षतिग्रस्त मरम्मत मद से यातायात चालू करने हेतु तैयार किया गया है  
जिसकी प्राक्कलित लागत Rs. 1946248 है।  
उक्त पथ का निर्माण M.M.O.S. योनान्तर्गत हुआ है एवं योजना अनुरक्षण  
अवधि में .....। पथ के कटे (क्षतिग्रस्त)  
भाग में आवश्यकता अनुसार Hume Pipe, Bamboo, लोकल बालू एवं Brick Bats देने के बाद  
यातायात चालू कराया गया है। पथ के विभिन्न हिस्से में कराये गये कार्य का विवरणी स्पष्ट  
रूप से प्राक्कलन में दर्शाया गया है।  
प्राक्कलन मदों का दर वर्तमान अनुसूचित दर के अनुरूप है।

  
20/10/20

कनीय अभियंता,  
ग्रामीण कार्य विभाग,  
कार्य प्रशाखा, .....।

  
20/10/20

सहायक अभियंता,  
ग्रामीण कार्य विभाग,  
कार्य अवर प्रमण्डल, .....।

  
20/10/20

कार्यपालक अभियंता,  
ग्रामीण कार्य विभाग,  
कार्य प्रमण्डल, .....  
Executive Engineer  
Rural Works Department  
Work Division Triveniganj

## Inspection Report for Flood Damage Work

Date:-.....

1.Name of PIUs:-

2.Name of Block:- CHHATAPUR

3.Name of Road:- Roadhamantori Matiyari to Baramota Meshaitola

### A. For Road

1.Damage Location/Chainage :- In 2nd km, and Road Length - 3KM

2.Damage Length :- 80M + 20 = 100M

3.Nature of Damage :- Road wash out

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:-

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :-

### B. For Bridge

1. Damage Location/Chainage:- CH In 2nd km

2.Damage Length :- 80M + 20 = 100M

3.Nature of Damage :- Road wash out

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:-

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :

Signature of JE/AE/EE

Signature

(Name of Inspector)

# Abstract of Cost

**Name of Work :** Estimate for Repairing/Restoration/Making Motorable Roads  
Damaged during flood in 2020 in SUPAUL District

**Name of Road:**

**PRADHANMANRTI MATIYARI TO BRAHMOTRA MUSHARI TOLA**

**Block:** CHHATAPUR

**District:** SUPAUL

**Division :** RWD, Works Division, TRIVENIGANJ

**Circle:** RWD, Work Circle, Madhepura

Sl No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.				
		Cum	1456.67	522.67	761355.97
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.				
		Cum	462.00	1751.13	809022.06
3	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.				
		meter	45.00	3377.00	151965.00
	<b>TOTAL AMOUNT =</b>				<b>1722343.03</b>
	<b>ADD 12.00 %GST=</b>				<b>206681.16</b>
	<b>ADD 1% L.CESS=</b>				<b>17223.43</b>
	<b>SAY TOTAL AMOUNT =</b>				<b>1946247.62</b>

1946248.00

*AE*  
20/10/20  
JE

S F = 69774

*Sub*  
20/10  
AE

Add S. Fee Rs 69774.00, Rs 2016022.00

*Any*  
20/10/20  
EE

RWD SUB DIVISION-CHHATAPUR

RWD SUB DIV.  
CHHATAPUR

RWD WORKS DIV. TRIVENIGANJ  
Executive Engineer  
Rural Works Department  
Work Division, Trivenigani

*Technically Approved for Rs 20,16,022/-  
(Twenty lac sixteen thousand twenty two) only.*

SE  
MADHEPURA

*11/10/21*

अधीक्षक अभियंता  
ग्रामीण कार्य विभाग  
कार्य अंचल, मधेपुरा

## Detailed Estimate

Name of Road:

**PRADHANMANRTI MATIYARI TO BRAHMOTRA MUJSHARI TOLA**

Sl No.	Items of Works	Nos.	L (m)	B (m)	D (m) IN (Av.)	Quantity (m <sup>3</sup> )
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.					
		1	40.00	(9.00+10.00)/2	(3.50+5.0+3.0)/3	1456.67
					TOTAL=	1456.67
					Total Qty =	1456.67
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.					
	1ST LAYER	1	40.00	(8.50+7.50)/2	0.90	288.00
	TOP LAYER	1	80.00	(7.00+7.50)/2	0.30	174.00
					Total Qty. =	462.00
3	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.					
	1ST CUTTING	6	3.00	2.50		45.00
					Total Qty. =	45.00

*[Signature]*  
20/10/20  
JE

*[Signature]*  
20/10/20  
AE

*[Signature]*  
26/11/20  
EE

RWD SUB DIV- CHHATAPUR

RWD SUB DIV. CHHATAPUR RWD WORKS DIV. TRIVENIGANI  
Rural Works Department  
Work Division, Trivenigani