


(12)

RURAL WORKS DEPARTMENT

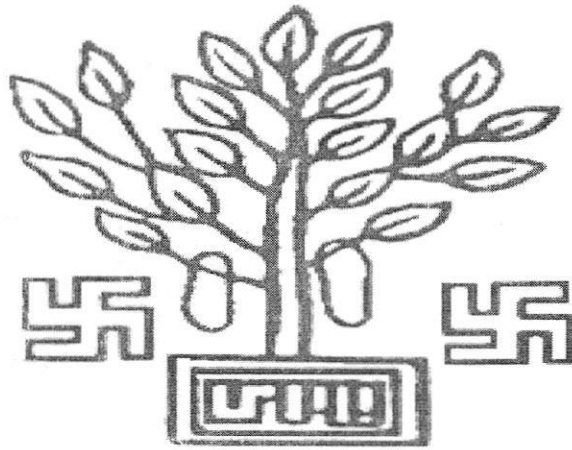

GOVERNMENT OF BIHAR

NAME OF ROAD:-

PMGSY TO MUSLIM TOLA

DIVISION:-

R.W.D, WORKS DIVISION, TRIVENIGANJ

CIRCLE:-

R.W.D, WORK CIRCLE, MADHEPURA

BLOCK:-

CHHATAPUR

ESTIMATED COST

- 476300 = 00
'''

प्रतिवेदन

पथ का नाम :-

PMGSY ROAD TO MUSLIM TOLA.

कार्य का नाम :-

Restoration works -

पथ में बाढ़ से क्षतिग्रस्त भाग में यातायात चालू करने का कार्य।

संलग्न प्राक्कलन 10.06.2020 को प्रखण्ड में आयी भीषण बाढ़ से क्षतिग्रस्त 0.015 km.

में बाढ़ क्षतिग्रस्त मरम्मति मद से यातायात चालू करने हेतु तैयार किया गया है जिसकी प्राक्कलित लागत 6,47,630/- है।

उक्त पथ का निर्माण PMGSY TO MUSLIM TOLA योनान्तर्गत हुआ है एवं योजना अनुरक्षण अवधि में पथ के कटे (क्षतिग्रस्त)

भाग में आवश्यकता अनुसार Hume Pipe, Bamboo, लोकल बालू एवं Brick Bats देने के बाद यातायात चालू कराया गया है। पथ के विभिन्न हिस्से में कराये गये कार्य का विवरणी स्पष्ट रूप से प्राक्कलन में दर्शाया गया है।

प्राक्कलन मदों का दर वर्तमान अनुसूचित दर के अनुरूप है।

कनीय अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रशाखा,

सहायक अभियंता,
ग्रामीण कार्य विभाग,
कार्य अवर प्रमण्डल,

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल,

Inspection Report for Flood Damage Work

Date:-.....

1.Name of PIUs:-

2.Name of Block:- CHHATAPUR

3.Name of Road:- PMGSY TO MUSLIMFOLA

A. For Road

0.80 km

1.Damage Location/Chainage :-

2.Damage Length

0.015 km.

3.Nature of Damage

W/over road.

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:-

B/Bat, HP, W/sand.

(ii.)Equipments/Tools being used in Restoration works:-

Tractor, Trolley JCB.

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :-

0.015 KM.

B For Bridge

1. Damage Location/Chainage:-

2.Damage Length :-

3.Nature of Damage :-

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:-

Local Sand, Brick Bat, C.C.Bg
Hamper.

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :

Signature of JE/AE/EE

Signature

(Name of Inspector)

Abstract of Cost

Name of Work : Estimate for Repairing/Restoration/Making Motorable Roads
Damaged during flood in 2020 in SUPAUL District

Name of Road:

PMGSY TO MUSLIM TOLA

Block: CHHATAPUR

District: SUPAUL

Divison : RWD, Works Division, TRIVENIGANJ

Circle: RWD, Work Circle, Madhepura

length - 0.86m

Sl No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.				
		Cum	170.63	522.67	89180.57
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.				
		Cum	138.95	1751.13	243319.51
3	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.				
		meter	22.50	3280.50	73811.25
	TOTAL AMOUNT =				406311.33
	ADD 1 % LABOUR CESS=				4063.11
	ADD 12.00 %GST=				48757.36
	SAY TOTAL AMOUNT =				459131.81

459132.00

JE
JE

Add S. Fee

Sal 20/10
AE

RWD SUB DIV.
CHHATAPUR

17,190 = 0
4,76,322 = 00
say 4,76,300 = 00
EE 24/11

RWD WORKS DIV. TRIVENIGANJ

RWD SUB DIVISION-CHHATAPUR

T.A. for Rs 4,76,300 = 00 (Four lakh, seventy six thousand three hundred) only.

11/07/2021
अधीक्षण अभियंता
SE
MADHEPURA कार्य विभाग
कार्य अंचल, मधेपुरा

Detailed Estimate

Name of Road:

PMGSY TO MUSLIM TOLA

Sl No.	Items of Works	Nos.	L (m)	B (m)	D IN (Av.) (m)	Quantity (m3)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.	1	15.00	(6+7)/2	1.75	170.63
					TOTAL=	170.63
					Total Qty =	170.63
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.	1	5.50	8.90	1.00	48.95
		1	15.00	(5.5+6.5/2)	1.00	90.00
					Total Qty. =	138.95
3	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.	3	3.00	2.50		22.50
					Total Qty. =	22.50


JE

RWD SUB DIV- CHHATAPUR


AE

RWD SUB DIV. CHHATAPUR


EE

RWD WORKS DIV. TRIVENIGANJ