


94/54 38 (2)

RURAL WORKS DEPARTMENT

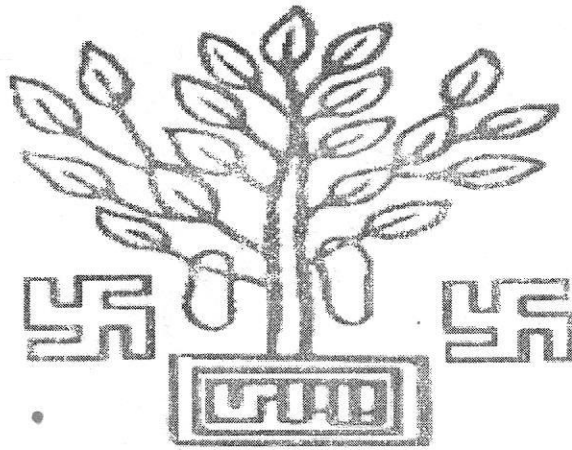

GOVERNMENT OF BIHAR

NAME OF ROAD:-

NH-57 TO MULLAH TOLA

DIVISION:-

R.W.D, WORKS DIVISION, TRIVENIGANJ

CIRCLE:-

R.W.D, WORK CIRCLE, MADHEPURA

BLOCK:-

CHHATAPUR

ESTIMATED COST

516265.00

Rs 534872.00

प्रतिवेदन

पथ का नाम :- NH-57 to Mullah Tola

कार्य का नाम :-

Roccolongli-21km

पथ की लम्बाई 2km

बाढ़ से क्षतिग्रस्त भाग में यातायात चालू करने का कार्य।

संलग्न प्राक्कलन 10.06.2020 को प्रखण्ड में आयी भीषण बाढ़ से क्षतिग्रस्त 2.25m

में बाढ़ क्षतिग्रस्त मरम्मति मद से यातायात चालू करने हेतु तैयार किया गया है

जिसकी प्राक्कलित लागत Rs 516265

उक्त पथ का निर्माण G.T.S.M.Y. योनान्तर्गत हुआ है एवं योजना अनुरक्षण

अवधि में।

पथ के कटे (क्षतिग्रस्त)

भाग में आवश्यकता अनुसार Hume Pipe, Bamboo, लोकल बालू एवं Brick Bats देने के बाद


यातायात चालू कराया गया है। पथ के विभिन्न हिस्से में कराये गये कार्य का विवरणी स्पष्ट

रूप से प्राक्कलन में दर्शाया गया है।


प्राक्कलन मदों का दर वर्तमान अनुसूचित दर के अनुरूप है।



कनीय अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रशाखा,।



सहायक अभियंता,
ग्रामीण कार्य विभाग,
कार्य अवर प्रमण्डल,।



कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल,।

Executive Engineer
Rural Works Department
Muzaffargarh, Punjab

Inspection Report for Flood Damage Work

Date:-.....

1.Name of PIUs:-

2.Name of Block:- CHHATAPUR

3.Name of Road:- NH-57 TO MULLAH TOLA

A. For Road

1.Damage Location/Chainage :- 1100m (1.1km)

2.Damage Length :- 75m

3.Nature of Damage :- Road wash out

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:-

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :-

B. For Bridge

1. Damage Location/Chainage:- 1100m (1.1km)

2.Damage Length :- 75m

3.Nature of Damage :- Road wash out

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:-

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :

Signature of JE/AE/EE

Signature

(Name of Inspector)

Abstract of Cost

Name of Work : Estimate for Repairing/Restoration/Making Motorable Roads
Damaged during flood in 2020 in SUPAUL District

Name of Road:

NH-57 TO MULLAH TOLA

Block: CHHATAPUR

District: SUPAUL

Divison : RWD, Works Division, TRIVENIGANJ

Circle: RWD, Work Circle, Madhepura

Sl No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.				
		Cum	345.00	522.67	180321.15
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.				
		Cum	129.00	1751.13	225895.77
3	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.				
		meter	15.00	3377.00	50655.00
	TOTAL AMOUNT =				456871.92
	ADD 12.00 %GST=				54824.63
	ADD 1% L.CESS=				4568.72
	SAY TOTAL AMOUNT =				516265.27

Add. S Fee Rs 18607.00

516265.00

Rs 534872.0

AP
20/10/20
JE

AP
20/10/20
AE

AP
20/10/20
EE

RWD SUB DIVISION-CHHATAPUR

RWD SUB DIV.
CHHATAPUR

RWD WORKS DIV. TRIVENIGANJ
Executive Engineer
Rural Works Department
Work Division Trivenigani

Technically approved for Rs 5,34,872.1-
(five Lac thirty four Thousand eight hundred
Seventy two) only

11/10/21

SE
MADHEPURA

अधीक्षण अभियंता
ग्रामीण कार्य विभाग
कार्य अंचल, मधेपुरा

Detailed Estimate

Name of Road:

NH-57 TO MULLAH TOLA

SI No.	Items of Works	Nos.	L (m)	B (m)	D (m) IN (Av.)	Quantity (m3)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.					
		1	20.00	(9.00+6.00)/2	2.30	345.00
					TOTAL=	345.00
					Total Qty =	345.00
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.					
	BELOW WATER LEVEL	1	20.00	7.00	0.60	84.00
	TOP LAYER	1	25.00	6.00	0.30	45.00
					Total Qty. =	129.00
3	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.					
		2	3.00	2.50		15.00
					Total Qty. =	15.00


JE

RWD SUB DIV- CHHATAPUR


AE

RWD SUB DIV. CHHATAPUR RWD WORKS DIV. TRIVENIGANJ


EE

Rural Works Department
Work Division, Triveniganj