


8

RURAL WORKS DEPARTMENT

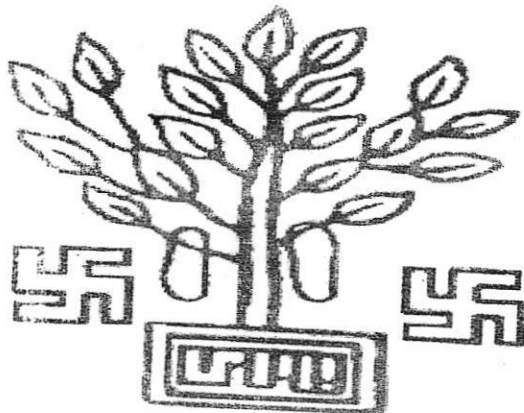

GOVERNMENT OF BIHAR

NAME OF ROAD:- L022 GHIWHA PWD ROAD TO BRAHAMAN TOLA (VR11)

DIVISION:- R.W.D, WORKS DIVISION, TRIVENIGANJ

CIRCLE:- R.W.D, WORK CIRCLE, MADHEPURA

BLOCK:- CHHATAPUR

ESTIMATED COST - 3851800.00 2842800/-

प्रतिवेदन

पथ का नाम:— **L022 धिवहा PWD** रोड से ब्राहमन टोला (VR11)

कार्य का नाम:— बाढ़ से क्षतिग्रस्त भाग में यातायात चालम करने का कार्य।

संलग्न प्राक्कलन **2842800.00** को प्रखण्ड में आयी भीषण से क्षतिग्रस्त 500 मी० में बाढ़ क्षतिग्रस्त मरम्मति मद से यातायात चालू करने हेतु तैयार किया गया है। उक्त पथ का निर्माण **MMGSY**. योनान्तर्गत हुआ है एवं योजना अनुरक्षण अवधि में.....।

पथ के कटे (क्षतिग्रस्त) भाग में आवश्यकता अनुसार **Hume Pipe**, लोकल बालू एवं **Brick Bats** प्राक्कलन में दर्शाया गया है।

प्राक्कलन मदों का दर वर्तमान अनुसूचित दर के अनुरूप है।


कनीय अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रशाखा.....।


सहायक अभियंता,
ग्रामीण कार्य विभाग,
कार्य अवर प्रमण्डल.....।


कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल.....।

Inspection Report for Flood Damage Work

Date:.....

1.Name of PIUs:-

EE RUDW. DIV Tribeni

2.Name of Block:- Chhapra

3.Name of Road:- Ghurh P.W.D. Road to Brahman Jola (V.R.-11)

4. For Road

1.Damage Location/Chainage:- ~~at~~ 260 m + 290 m = 550 m.

2.Damage Length

100 m

3.Nature of Damage

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:- Brick Bat, Local Sand & H.P 1500 mm Ø

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :- 100 m

5. For Bridge

1. Damage Location/Chainage:-

2.Damage Length :-

3.Nature of Damage :-

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:-

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :

Signature of JE/AE/EE
29/9/20

Signature
28/1/2021

(Name of Inspector)

Abstract of Cost

Name of Work : Estimate for Repairing/Restoration/Making Motorable Roads
Damaged during flood in 2020 in SUPAUL District

Name of Road:

L022 GHIWHA PWD ROAD TO BRAHAMAN TOLA (VR11)PART -A

Block: CHHATAPUR

District: SUPAUL

Divison : RWD, Works Division, TRIVENIGANJ

Circle: RWD, Work Circle, Madhepura

Sl No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.				
		Cum	2403.49	522.67	1256230.81
	TOTAL AMOUNT =				1256230.81
	ADD 1.00 %LABOUR CESS=				12562.31
	ADD 12.00 %GST=				150747.70
	SAY TOTAL AMOUNT =				1419540.82

19/20
JE

RWD SUB DIVISION-CHHATAPUR

24/10
AE

RWD SUB DIV.
CHHATAPUR

S. fee
1419541.00
34876.00
1453635.00
EE

RWD WORKS DIV. TRIVENIGANJ

SE
MADHEPURA

Detailed Estimate

Name of Road:

L022 GHIWHA PWD ROAD TO BRAHAMAN TOLA (VR11)PART -A

Sl No.	Items of Works	Nos.	L (m)	B (m)	D (m)	IN (Av.)	Quantity (m3)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.						
	R/S	1	15.50	(1+10)/2	8.50		731.21
		1	30.00	(1.5+8.9)/2	(6.5+4.5)/2		858.00
		1	20.00	(1.5+9.5)/2	(4.5+2.55)/2		387.75
	L/S	1	40.00	(1.55+4.5)/2	(4.25+2.8)/2		426.53
					TOTAL=		2403.49
					Total Qty =		2403.49
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.						
		0	5.50	8.90	1.00		0.00
		0	15.00	(5.5+6.5)/2	1.00		0.00
					Total Qty. =		0.00
3	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.						
		0	3.00	2.50			0.00
					Total Qty. =		0.00


JE


AE


EE

RWD SUB DIV- CHHATAPUR

RWD SUB DIV. CHHATAPUR

RWD WORKS DIV. TRIVENIGANJ

**DETAIL OF ESTIMATE FOR RESTORATION OF
Abstract of Cost**

Division:- RWD triveniganj

BLOCK :- CHHATAPUR

Name of Road : **L022 GHIWHA PWD ROAD TO BRAHAMAN TOLA (VR11) PART- B**

Sub division:-Chhatapur

PANCHAYAT :-

Length of Breach

Yr. 2020-21

Sl. No./ item no.	Item of works	Quantity	Unit	Rate	Amount
1	Filling of local sand obtained from river bed Watering & ramming all com.job	1218.52	per cum	522.67	636883.85
2	Supply and carriage of brikk bats up to 8 km from breach and placing in breach and laying of bats all complete job. as perspecification and direction of E/I	319.06	per cum	1751.13	558715.54
3	laying reinforced cement concrete pipe NP3 for culverts on first class bedding of granular material in single row including fixing collar with cement mortar 1:2 but excluding excavation, protection works, backfilling, concrete and masonry 1000MM Dia Pipe	10.00	per cum	3377	33770.00
		#REF!	NOs	141.50	1229369.39
					1229369.39

Add 12% GST

147524.33

Add 1% Labour cess total item

12293.69

Total

1389187.41

SAY Rs

1389200.00


Junior Engine
Chhatapur


S D O
Rural Works Sub division
Chhatapur


Executive Engineer
Rural Works division
Triveniganj

Detailed Estimate


Name of Road:

L022 GHIWHA PWD ROAD TO BRAHAMAN TOLA (VR11)PART -B

Sl No.	Items of Works	Nos.	L (m)	B (m)	D (m) IN (Av.)	Quantity (m3)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.					
		1	30.00	(9+5.5)/2	(2.75+1.5)/2	462.19
		2	30.00	(1.5+2.5)/2	1.50	180.00
		1	40.00	(9.5+6.50)/2	(2.50+1.5+2.65)/3	576.33
					TOTAL=	1218.52
					Total Qty =	1218.52
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.					
		1	10.00	(7.5+4.5)/2	0.8	48.00
		1	13.00	(8.86+7.5)/2	1.25	132.93
		1	10.00	6.50+6.85	(2.5+1.75)/2	138.13
					Total Qty. =	319.06 m3
3	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.					
		2	2.00	2.50		10.00
					Total Qty. =	10.00


JE


AE


EE

RWD SUB DIV- CHHATAPUR

RWD SUB DIV. CHHATAPUR

RWD WORKS DIV. TRIVENIGANJ

ABSTRACT OF COST

DETAILS OF ESTIMATE FOR REPAIR /MOTARABLE WORK

ROAD AT ROAD-

LO22 GHIWAHA PWD ROAD TO BRAHAMAN TOLA (VR-11)

AS PER ACTUAL WORK DONE

Division:- RWD triveniganj

BLOCK :- CHHATAPUR

Sub division:-Chhatapur

Length - 7.875 km

Yr. 2020-21

Sl. No./ item no.	Item of works		
1	PART -A		1453635.00
	PART-B		1389200.00
2			
	TOTAL=		2842835.00

Say Rs. 2842800.00

Junior Engineer
Chhatapur

S D O
Rural Works Sub division
Chhatapur

Executive Engineer
Rural Works division
Triveniganj

T.A. for Rs. 2842800.00 (Rs. Twenty eight -
lacs forty two thousand eight-
hundred) only.

11/07/2021
अधीक्षक अभियंता
MADHUPUR विभाग
कार्य अंचल, मधेपुरा