


24
49

RURAL WORKS DEPARTMENT

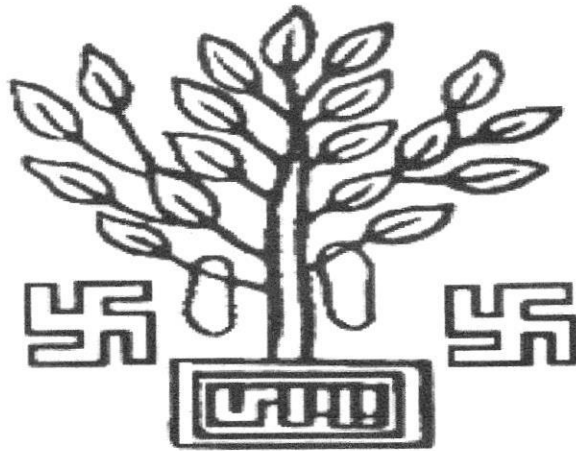

GOVERNMENT OF BIHAR

NAME OF ROAD:- NH-57 TO BHIMPUR POLICE STATION.

DIVISION:- R.W.D, WORKS DIVISION, TRIVENIGANJ

CIRCLE:- R.W.D, WORK CIRCLE, MADHEPURA

BLOCK:- CHHATAPUR

ESTIMATED COST

2772742.00

Ry 2869800.00

प्रतिवेदन

पथ का नाम :- NH-57 TO Bhimpur Police Station

कार्य का नाम :- Road length - 2KM

में बाढ़ से क्षतिग्रस्त भाग में यातायात चालू करने का कार्य।

संलग्न प्राक्कलन 10.06.2020 को प्रखण्ड में आयी भीषण बाढ़ से क्षतिग्रस्त पथ $140m + 90m = 230m$

में बाढ़ क्षतिग्रस्त मरम्मति मद से यातायात चालू करने हेतु तैयार किया गया है

जिसकी प्राक्कलित लागत Rs. 34,66,520 है।

उक्त पथ का निर्माण निविदा प्रक्रिया से खेनान्तर्गत हुआ है एवं योजना अनुरक्षण

अवधि में पथ के कटे (क्षतिग्रस्त)

भाग में आवश्यकता अनुसार Hume Pipe, Bamboo, लोकल बालू एवं Brick Bats देने के बाद

यातायात चालू कराया गया है। पथ के विभिन्न हिस्से में कराये गये कार्य का विवरणी स्पष्ट

रूप से प्राक्कलन में दर्शाया गया है।

प्राक्कलन मदों का दर वर्तमान अनुसूचित दर के अनुरूप है।

AK
10/11/20

कनीय अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रशाखा,

Sul
15/11/20

सहायक अभियंता,
ग्रामीण कार्य विभाग,
कार्य अवर प्रमण्डल,

SM
26/11/20

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल Engineer,
Rural Works Department
Work Division, Trivenigani

Inspection Report for Flood Damage Work

Date:-.....

1.Name of PIUs:-

2.Name of Block:- CHHATAPUR

3.Name of Road:- NH-57 to Bhimpur Police station, Length/Rwd- 21km

A. For Road

1.Damage Location/Chainage :- CH- Ind 2nd km

2.Damage Length :- 200m

3.Nature of Damage :- Road wash out

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:- C/Band, 1000mm/11. Brick bats,

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :-

B. For Bridge

1. Damage Location/Chainage:- CH- 2nd km

2.Damage Length :- 200m

3.Nature of Damage :- Rd wash out

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:-

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :

Signature of JE/AE/EE

Signature

(Name of Inspector)

Abstract of Cost

Name of Work : Estimate for Repairing/Restoration/Making Motorable Roads
Damaged during flood in 2020 in SUPAUL District

Name of Road:

NH-57 TO BHIMPUR POLICE STATION.

Block: CHHATAPUR

District: SUPAUL

Divison : RWD, Works Division, TRIVENIGANJ

Circle: RWD, Work Circle, Madhepura

Sl No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.				
		Cum	3215.00	522.67	1680384.05
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.				
		Cum	398.25	1751.13	697387.52
3	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.				
		meter	22.50	3377.00	75982.50
	TOTAL AMOUNT =				2453754.07
	ADD 12.00 %GST=				294450.49
	ADD 1% L.CESS=				24537.54
	SEIGNIORAGE FEE=				97058.00
	SAY TOTAL AMOUNT =				2772742.10

2772742.00-

Rs 2869800-00

[Signature]
JE

RWD SUB DIVISION-CHHATAPUR

[Signature]
AE

RWD SUB DIV.
CHHATAPUR

[Signature]
EE

EXECUTIVE ENGINEER
RWD WORKS DIV. TRIVENIGANJ
TRIVENIGANJ

Technically approved for Rs 28,69,800-00
(Rupees twenty eight Lac Sixty nine Thousand Eight hundred only)

SE
MADHEPURA

[Signature]
अधीक्षक अभियंता
ग्रामीण कार्य विभाग
कार्य अंचल, मधेपुरा

Detailed Estimate

Name of Road:

NH-57 TO BHIMPUR POLICE STATION.

Sl No.	Items of Works	Nos.	L (m)	B (m)	D (m) IN (Av.)	Quantity (m3)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.					
		1	200.00	$(6+6.5+7.5+6.5+5.65)/5$	$(3+2+2.50)/3$	3215.00
					TOTAL=	3215.00
					Total Qty. =	3215.00
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.					
		1	150.00	$(7.00+7.50)/2$	0.30	326.25
	BELOW WATER LEVEL	1	30.00	$(7.50+8.50)/2$	0.30	72.00
					Total Qty. =	398.25
3	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.					
		3	3.00	2.50		22.50
					Total Qty. =	22.50


JE

RWD SUB DIV- CHHATAPUR


AE

RWD SUB DIV. CHHATAPUR


EE

EXECUTIVE ENGINEER
RWD WORKS DIV. TRIVENIGANJ
TRIVENIGANJ