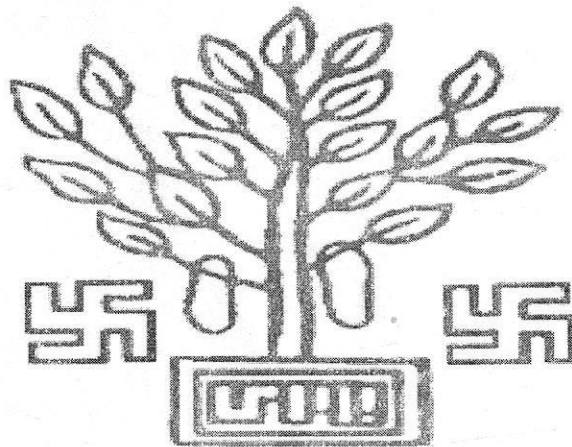


92
22

RURAL WORKS DEPARTMENT



GOVERNMENT OF BIHAR

NAME OF ROAD:- HOUSE OF MANILAL PASWAN TO
ADIWASHI TOLA

DIVISION:- R.W.D, WORKS DIVISION, TRIVENIGANGA

CIRCLE:- R.W.D, WORK CIRCLE, MADHEPURA

BLOCK:- CHHATAPUR

ESTIMATED COST

2498969.00

2604435.00

प्रतिवेदन

पथ का नाम :- House of Manilal Paswan to Adiwashi tola.

कार्य का नाम :- Road Length - 31km

में बाढ़ से क्षतिग्रस्त भाग में यातायात चालू करने का कार्य।

संलग्न प्राक्कलन 10.06.2020 को प्रखण्ड में आयी भीषण बाढ़ से क्षतिग्रस्त पथ 90m + 60m = 150m

में बाढ़ क्षतिग्रस्त मरम्मति मद से यातायात चालू करने हेतु तैयार किया गया है


जिसकी प्राक्कलित लागत Re. 2498969 है।

उक्त पथ का निर्माण निविदा प्रक्रिया से योजनान्तर्गत हुआ है एवं योजना अनुरक्षण अवधि में।


पथ के कटे (क्षतिग्रस्त)

भाग में आवश्यकता अनुसार Hume Pipe, Bamboo, लोकल बालू एवं Brick Bats देने के बाद यातायात चालू कराया गया है। पथ के विभिन्न हिस्से में कराये गये कार्य का विवरणी स्पष्ट रूप से प्राक्कलन में दर्शाया गया है।

प्राक्कलन मदों का दर वर्तमान अनुसूचित दर के अनुरूप है।


15-11-20
कनीय अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रशाखा,।


सहायक अभियंता,
ग्रामीण कार्य विभाग,
कार्य अवर प्रमण्डल,।


30/11/20
कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल, Engineer.
Rural Works Department
Work Division, Trivenigani

Inspection Report for Flood Damage Work

Date:-.....

1.Name of PIUs:-

2.Name of Block:- CHHATAPUR

3.Name of Road:- House of Manilal Paswan to Adiwashi tola

A. For Road

1.Damage Location/Chainage :- In 1st Km

2.Damage Length :- 90m + 60m = 150m

3.Nature of Damage :- wash out

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:-

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :-

B. For Bridge

1. Damage Location/Chainage:- In 1st Km

2.Damage Length :- 90m + 60m = 150m

3.Nature of Damage :- wash out

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:-

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :

Signature of JE/AE/EE
15/11/20
26/11/20

Signature of JE/AE/EE
26/11/20
26/11/20

Signature
28/01/2021

(Name of Inspector)

Abstract of Cost

Name of Work : Estimate for Repairing/Restoration/Making Motorable Roads
Damaged during flood in 2020 in SUPAUL District

Name of Road:

HOUSE OF MANILAL PASWAN TO ADIWASHI TOLA

Block: CHHATAPUR

District: SUPAUL

Division : RWD, Works Division, TRIVENIGANJ

Circle: RWD, Work Circle, Madhepura

SI No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.				
		Cum	1643.33	522.67	858921.03
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.				
		Cum	729.00	1751.13	1276573.77
3	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.				
		meter	22.50	3377.00	75982.50
	TOTAL AMOUNT =				2211477.30
	ADD 12.00 %GST=				265377.28
	ADD 1% L.CESS=				22114.77
	SAY TOTAL AMOUNT =				2498969.35

2498969.00

Add S Fee

Ry 105465.00

Ry 2604435.00

20/11/20

EE

AK
15-11-20

JE

AE

RWD SUB DIV.
CHHATAPUR

RWD SUB DIVISION-CHHATAPUR

RWD WORKS DIV. TRIVENIGANJ

Rural Works Department
Work Division, Triveniganj

Technically approved for Rs 2604435.00
(Rupees twenty six Lac four Thousand four hundred
Thirty five only)

1/10/21

अधीक्षक अभियंता
ग्रामीण कार्य विभाग
कार्य अंचल, मधेपुरा

SE
MADHEPURA

Detailed Estimate

Name of Road:

HOUSE OF MANILAL PASWAN TO ADIWASHI TOLA

SI No.	Items of Works	Nos.	L (m)	B (m)	D (m) IN (Av.)	Quantity (m ³)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.					
	MAIN CUTTING	1	50.00	(9.00+8.00)/2	(3.3+4.5+3.80)/3	1643.33
					TOTAL=	1643.33
					Total Qty =	1643.33
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.					
	MAIN CUTTING BELOW WATER LEVEL	1	50.00	(7.00+8.00)/2	0.90	337.50
	TOP LAYER	1	90.00	(7.00+7.50)/2	0.60	391.50
					Total Qty. =	729.00
3	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.					
	1ST CUTTING	3	3.00	2.50		22.50
					Total Qty. =	22.50

AKD
15-11-20
JE

AKD
20/11/20
AE

AKD
30/11/20
EE

RWD SUB DIV- CHHATAPUR

RWD SUB DIV. CHHATAPUR

RWD WORKS DIV. TRIVENIGANJ

Rural Works Department
Work Division, Triveniganj