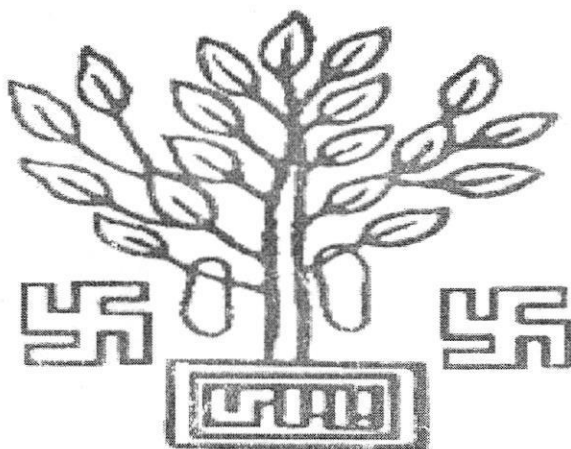


39 42

RURAL WORKS DEPARTMENT



GOVERNMENT OF BIHAR

NAME OF ROAD:- PMGSY SADAK MIDDLE SCHOOL MADHUBANI
BRAHMANI TOLA PACHIM TO PMGSY SADAK
GULAB MISHARA KE AGE VIA RAM TOLA

DIVISION:- R.W.D, WORKS DIVISION, TRIVENIGANJ

CIRCLE:- R.W.D, WORK CIRCLE, MADHEPURA

BLOCK:- CHHATAPUR

ESTIMATED COST


3719763.00


3845167.00

प्रतिवेदन
पथ का नाम :- PMGSY Sadak Middle school madhubani Boaharman tol
कार्य का नाम :- to PMGSY Sadak Gulab Misra ke Ghor via Ram tola
पथ की लम्बाई = 4km
में बाढ़ से क्षतिग्रस्त भाग में यातायात चालू करने का कार्य।

संलग्न प्राक्कलन 10.06.2020 को प्रखण्ड में आयी भीषण बाढ़ से क्षतिग्रस्त पथ 100m
में बाढ़ क्षतिग्रस्त मरम्मति मद से यातायात चालू करने हेतु तैयार किया गया है
जिसकी प्राक्कलित लागत Re 3488824 है।
उक्त पथ का निर्माण निविदा प्रक्रिया में योजनान्तर्गत हुआ है एवं योजना अनुरक्षण
अवधि में। पथ के कटे (क्षतिग्रस्त)
भाग में आवश्यकता अनुसार Hume Pipe, Bamboo, लोकल बालू एवं Brick Bats देने के बाद
यातायात चालू कराया गया है। पथ के विभिन्न हिस्से में कराये गये कार्य का विवरणी स्पष्ट
रूप से प्राक्कलन में दर्शाया गया है।
प्राक्कलन मदों का दर वर्तमान अनुसूचित दर के अनुरूप है।


20/06/20
20/06/20
कनीय अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रशाखा,।


20/06/20
सहायक अभियंता,
ग्रामीण कार्य विभाग,
कार्य अवर प्रमण्डल,।


20/06/20
कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल,।
Executive Engineer
Rural Works Department
Work Division, Triveniganj

Inspection Report for Flood Damage Work

Date:-.....

1. Name of PIUs:-

2. Name of Block:- CHHATAPUR

3. Name of Road:- PMGSY Sadak Middle school madhubani Boahamam
tola to PMGSY Sadak Gulab Misra ke Ghar via Ramtal

A. For Road

1. Damage Location/Chainage :- CH- 5th km. Road Length - 4km

2. Damage Length :- ~~100m~~ (60+335 = 0395m)

3. Nature of Damage :- Road wash out.

4. Details of Restoration Works:-

(i.) Material being used in Restoration Works:-

(ii.) Equipments/Tools being used in Restoration works:-

(iii.) Procedure taken up in Restoration works:-

(iv.) Restored Length :-

B. For Bridge

1. Damage Location/Chainage:- CH- 5th km

2. Damage Length :- ~~100m~~ 395m

3. Nature of Damage :- Road wash out.

4. Details of Restoration Works:-

(i.) Material being used in Restoration Works:-

(ii.) Equipments/Tools being used in Restoration works:-

(iii.) Procedure taken up in Restoration works:-

(iv.) Restored Length :

Signature of JE/AE/EE

Signature

(Name of Inspector)

सेवा में,

कार्यपालक अभियंता,

ग्रामीण कार्य विभाग कार्य प्रमंडल, त्रिवेणीगंज।

त्रिवेणीगंज, दिनांक- 14.10.2020

विषय : बिहार विधान सभा आम निर्वाचन 2020 के मतदान केंद्र तक पहुँच पथ के निर्माण के संबंध में।

महाराज,

उपर्युक्त विषयक संदर्भ में कहना है कि बिहार विधान सभा आम निर्वाचन 2020 के मतदान केंद्र तक चार स्रोतों से मतदान केंद्र तक पहुँच पथ के निर्माण एवं मरम्मत से जुड़े जन शिकायत आवेदन पत्र प्राप्त हुआ है, जिसका विवरण इस प्रकार है -

क्र०	आवेदक का नाम व पता	शिकायत का विषय वस्तु	अभ्युक्ति
1	2	3	4
1	आशीषकान्त झा व 10 अन्य ग्रामीण जनता ग्राम-पंचायत-मधुबनी, प्रखंड- छातापुर	मधुबनी पंचायत अंतर्गत मेहता टोला प्रा० कि० मधुबनी में वार्ड न०-9,11,12 एवं संवि० मधुबनी में वार्ड न०-13 एवं संवि०कोहरा में वार्ड न०-3,4,5 में मतदाता के आवागमन हेतु कटारघरत सड़क को जोड़ने की संधि में।	
2	जयकृष्ण साह एवं 06 अन्य ग्राम पंचायत बलुआ प्रखंड-छातापुर	बलुआ पंचायत अंतर्गत मठावि० बलुआ में वार्ड न०-4 एवं 8 को जोड़ने वाली सड़क की मरम्मत के संबंध में।	
3	रजित कुमार सिंह एवं 10 अन्य, प्रा० पंचायत-भीमपुर प्रखंड-छातापुर	छातापुर मठावि० भीमपुर एवं मठावि० भीमपुर मतदान केंद्र पर जाने हेतु भीमपुर में वार्ड न०-3,5,9,10,11,12,13 से जुड़े सड़क की मरम्मत के संबंध में।	
4	ललन कुमार मंडल एवं 07 अन्य, ग्राम पंचायत- लक्ष्मीनिर्वा प्रखंड-छातापुर	रघुनंदन मठावि० एवं लक्ष्मीनिर्वा मतदान केंद्र पर जाने हेतु वार्ड न०-07, 11, 12 मंडल टोला एवं लक्ष्मीनिर्वा वार्ड न०-01,02 से जुड़े सड़क की मरम्मत एवं निर्माण के संबंध में।	

क्रम सं०- 01 से 04 पर अंकित परिवाद पत्र का विषय-वस्तु मतदान केंद्रों पर पहुँच पथ एवं आवागमन की सुविधा के दृष्टिगत चुनाव बहिष्कार करने के विरुद्ध वर्णित स्थलों पर मतदाताओं के आवागमन हेतु सड़क निर्माण एवं मरम्मत कार्य कराने व मतदाता को सुविधा मुहैया कराये जाने से संबंधित है। आवेदन पत्र की छायाप्रति संलग्न कर भेजी जा रही है।

अतः अनुरोध है कि वर्णित स्थलों पर आगामी विधान सभा निर्वाचन 2020 के मतदान केंद्र तक मतदाताओं के आवागमन हेतु पहुँच पथ के निर्माण व मरम्मत हेतु आवश्यक कार्रवाई करने का कृपया करेंगे।

अनुलग्नक : ०४

विश्वासभाजन,

निर्वाची पदाधिकारी

-सह-

अनुमंडल पदाधिकारी

त्रिवेणीगंज।

ABSTRACT OF COST

DETAILS OF ESTIMATE FOR REPAIR /MOTARABLE WORK

ROAD AT ROAD-

PMGSY SADAK MIDDLE SCHOOL MADHUBANI BRAHMANI TOLA PACHIM TO
PMGSY SADAK GULAB MISHARA KE AGE VIA RAM TOLA.

AS PER ACTUAL WORK DONE

Division:- RWD triveniganj

BLOCK :- CHHATAPUR

Sub division:-Chhatapur

Yr. 2020-21

Sl. No./ item no.	Item of works		
1	PART -A		2178673.00 2247371.00
	PART-B		1541090.00 1597796.00
2			
	TOTAL=		3719763.00 38,45,167.00

Am
20/10/20

Junior Engineer
Chhatapur

Am
20/10/20

S D O

Rural Works Sub division
Chhatapur

Am
26/11/20

Executive Engineer

Rural Works division

Triveniganj

Executive Engineer
Rural Works Department
Work Division Triveniganj

Technically approved for Rs 38,45,167.00

(Rupees thirty eight Lac forty five Thousand one hundred sixty seven only)

Am
07/04/21

SE

MADHEPURA

अधीक्षण अभियंता

ग्रामीण कार्य विभाग

कार्य अंचल, मधेपुरा

Detailed Estimate

Name of Road:

**PMGSY SADAK MIDDLE SCHOOL MADHUBAN BRAHMANI TOLA PACHIM TO PMGSY
SADAK GULAB MISHARA KE AGE VIA RAM TOLA. A**

Sl No.	Items of Works	Nos.	L (m)	B (m)	D (m) IN (Av.)	Quantity (m3)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.					
		1	60.00	(14.00+9.00)/2	(4.0+3.0)/2	2415.00
		0	340.00	(5+4.5+4)/3	(0.60+0.30)/2	0.00
					TOTAL=	2415.00
					Total Qty =	2415.00
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.					
		0	340.00	4.50	0.30	0.00
	TOP LAYER	1	60.00	6.00	0.90	324.00
					Total Qty. =	324.00
3	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.					
		4	3.00	2.50		30.00
					Total Qty. =	30.00


20/10/20
JE


20/10/20
AE


28/11/20
EE

RWD SUB DIV- CHHATAPUR

RWD SUB DIV. CHHATAPUR RWD WORKS DIV. TRIVENIGANJ

Executive Engineer
Rural Works Department
Work Division, Triveniganj

Abstract of Cost

Name of Work : Estimate for Repairing/Restoration/Making Motorable Roads
Damaged during flood in 2020 in SUPAUL District A

Name of Road:

PMGSY SADAK MIDDLE SCHOOL MADHUBAN BRAHMANI TOLA PACHIM TO PMGSY SADAK GULAB MISHARA KE AGE VIA RAM
TOLA.

Block: CHHATAPUR

District: SUPAUL

Division : RWD, Works Division, TRIVENIGANJ

Circle: RWD, Work Circle, Madhepura

Sl No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.				
		Cum	2415.00	522.67	1262248.05
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.				
		Cum	324.00	1751.13	567366.12
3	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.				
		meter	30.00	3280.50	98415.00
	TOTAL AMOUNT =				1928029.17
	ADD 12.00 %GST=				231363.50
	ADD 1% L.CESS=				19280.29
	SAY TOTAL AMOUNT =				2178672.96

2178673.00

Add S. Fee
SF = 686982

686982.00


Ry 22,47,371.00


JE 25/10/22

RWD SUB DIVISION-CHHATAPUR


AE 25/10/22

RWD SUB DIV.
CHHATAPUR


EE 26/10/22

RWD WORKS DIV. TRIVENIGANJ
Executive Engineer
Rural Works Department
Work Division, Triveniganj

SE
MADHEPURA

DETAIL OF ESTIMATE FOR REPAIR /MOTARABLE WORK

Abstract of Cost 8

Division:- RWD triveniganj
Sub division:-Chhatapur

BLOCK :- CHHATAPUR
PANCHAYAT :- Madhubani

Yr. 2020-21

Sl. No./ item no.	Item of works	Quantity	Unit	Rate	Amount
1	Filling of Local Sand Obtain from River Bed ,Watering & ramming all Complete as per spacification & direction of Engineer-in.Charge	771.75cum	Cum	626.89	483802.36
2	Supply and carriage of brikk bats up to 8 km from breach and placing in breach and laying of bats all complete job.specification and direction of E/I	410.3 cum	Cum	2145.02	879994.46
					1363796.81

Add 12% GST on item no 4, 5
Add 1% Labour cess total item
Total

1363796.81

163655.62

13637.97


1541090.40


Rs 1541090.00


S.Fee

Rs 5670600

Rs 1597796.00


Junior Engineer
Chhatapur


S D O
Rural Works Sub division
Chhatapur


Executive Engineer
Rural Works division
Triveniganj Engineer
Rural Works Department
Work Division, Triveniganj

DETAILS OF ESTIMATE FOR REPAIR /MOTARABLE WORK

ROAD AT RD.....

Madhubani panchayat ke WN 8 & 13 To Sanskrit Uchha Vid ,Madhubani

AS PER ACTUAL WORK DONE

Division:- RWD triveniganj

BLOCK :- CHHATAPUR

Sub division:-Chhatapur

PANCHAYAT :-


Madhubani

Yr. 2020-21

Sl. No./ item no.	Item of works	L	B	H	Quantity
1	Filling of Local Sand Obtain from River Bed ,Watering & ramming all Complete as per specification & direction of Engineer-in.Charge				771.75cum
2	Supply and carriage of brikk bats up to 8 km from breach and placing in breach and laying of bats all complete job. as perspecification and direction of E/I				410.3 cum


22/10/20
Junior Engineer
Chhatapur


22/10/20
S D O
Rural Works Sub division
Chhatapur


22/10/20
Executive Engineer
Rural Works division
Triveniganj
Executive Engineer
Rural Works Department
Madhubani Division, Triveniganj

MEASUREMENT SHEET

Filling of Local Sand Obtain from River Bed ,Watering & ramming all Complete as per spacification & direction of Engineer-in.Charge

1

Ch	Length in M	width in M	depth in (Av.)M	Quantity cum
1st KM	15	5.00	0.30	22.5cum
	30	5.00	0.60	90.0cum
	30	4.00	0.60	72.0cum
	50	4.00	0.60	120.0cum
	50	4.00	0.60	120.0cum
	5	5.00	0.60	15.0cum
	10	5.00	0.30	15.0cum
	20	4.00	0.30	24.0cum
	20	4.00	0.60	48.0cum
	30	4.00	0.60	72.0cum
	15	4.00	0.45	27.0cum
	45	5.00	0.45	101.3cum
	20	5.00	0.45	45.0cum
				771.8cum

Supply and carriage of brikk bats up to 8 km from breach and placing in breach and laying of bats all complete job.specification and direction of E/I

2

Ch	Length in M	width in M	depth in (Av.)M	Quantity cum
1st KM	15	4.50	0.30	20.3cum
	30	4.50	0.30	40.5cum
	30	3.50	0.30	31.5cum
	50	3.50	0.15	26.3cum
	50	3.50	0.30	52.5cum
	5	4.50	0.30	6.8cum
	10	4.50	0.30	13.5cum
	20	3.50	0.30	21.0cum
	20	3.50	0.45	31.5cum
	30	3.50	0.60	63.0cum
	15	3.50	0.30	15.8cum
	45	4.50	0.30	60.8cum
	20	4.50	0.30	27.0cum
				410.3cum

AK
20/10/20
Junior Engineer
Chhatapur

Sachin
24/10/20
S D O
Rural Works Sub division
Chhatapur

Am
24/11/20
Executive Engineer
Rural Works division
Triveniganj
EXECUTIVE ENGINEER
RWD WORKS DIVISION
TRIVENIGANJ