


38
27

RURAL WORKS DEPARTMENT

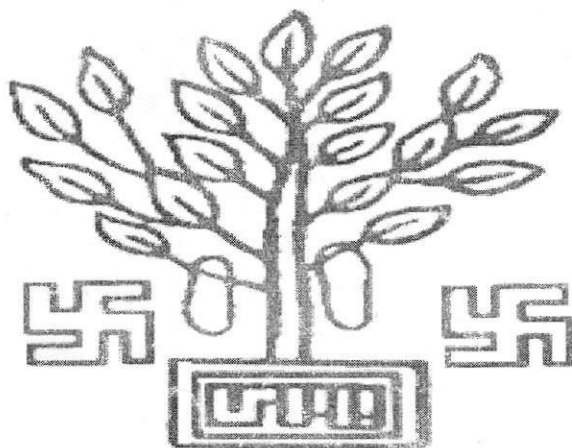

GOVERNMENT OF BIHAR

NAME OF ROAD:- BRAHAMAN TOLA PMGSY UDHAMPUR
BHAGWATIPUR TO RAMTOLA.

DIVISION:- R.W.D, WORKS DIVISION, TRIVENIGANJ

CIRCLE:- R.W.D, WORK CIRCLE, MADHEPURA

BLOCK:- CHHATAPUR

ESTIMATED COST

1119660.00

1155533.00

प्रतिवेदन
पथ का नाम :- Brahaman Tola Pmcst Udhampur Bhagwatipur Ram
कार्य का नाम :- Tola

में बाढ़ से क्षतिग्रस्त भाग में यातायात चालू करने का कार्य।

- संलग्न प्राक्कलन 10.06.2020 को प्रखण्ड में आयी भीषण बाढ़ से क्षतिग्रस्त UP - 46M, And Road long 31km
में बाढ़ क्षतिग्रस्त मरम्मत मद से यातायात चालू करने हेतु तैयार किया गया है
जिसकी प्राक्कलित लागत Rs 1119060 है।
उक्त पथ का निर्माण P.M.C.S.Y. योनान्तर्गत हुआ है एवं योजना अनुरक्षण
अवधि में काड़ी है पथ के कटे (क्षतिग्रस्त)
भाग में आवश्यकता अनुसार Hume Pipe, Bamboo, लोकल बालू एवं Brick Bats देने के बाद
यातायात चालू कराया गया है। पथ के विभिन्न हिस्से में कराये गये कार्य का विवरणी स्पष्ट
रूप से प्राक्कलन में दर्शाया गया है।
प्राक्कलन मदों का दर वर्तमान अनुसूचित दर के अनुरूप है।

AS
20/11/20
24/11/20
कनीय अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रशाखा,।

AS
15/11/20
सहायक अभियंता,
ग्रामीण कार्य विभाग,
कार्य अवर प्रमण्डल,।

AS
26/11/20
कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल,
Executive Engineer
Rural Works Department
Work Division, Trivenigani

Inspection Report for Flood Damage Work

Date:-.....

1.Name of PIUs:-

2.Name of Block:- CHHATAPUR

3.Name of Road:- Brahaman Tola PMSY Udhampur Bhagwatipura
To Ram tola

A. For Road

1.Damage Location/Chainage :- 2nd km

2.Damage Length :- 46m

3.Nature of Damage :- washout

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:-

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :-

B. For Bridge

1. Damage Location/Chainage:- 2nd km

2.Damage Length :- 46m

3.Nature of Damage :- washout

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:-

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :

Signature of JE/AE/EE

Signature

(Name of Inspector)

Abstract of Cost

Name of Work : Estimate for Repairing/Restoration/Making Motorable Roads Damaged during flood in 2020 in SUPAUL District

Name of Road:

BRAHAMAN TOLA PMGSY UDHAMPUR BHAGWATIPUR TO RAMTOLA.

Block: CHHATAPUR

District: SUPAUL

Division : RWD, Works Division, TRIVENIGANJ

Circle: RWD, Work Circle, Madhepura

Sl No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.				
		Cum	805.00	522.67	420749.35
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.				
		Cum	238.05	1751.13	416856.50
3	Construction of granular sub-base by providing well graded material, spreading in uniform layers with tractor mounted grader arrangement on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401.				
		Cum	17.25	3010.64	51933.54
4	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.				
		meter	30.00	3377.00	101310.00
	TOTAL AMOUNT =				990849.39
	ADD 12.00 %GST=				118901.93
	ADD 1% L.CESS=				9908.49
	SAY TOTAL AMOUNT =				1119659.81

1119660.00

Adel B. Fee Rs = 35873.00 Rs 1155533.00

AP
15-11-20
JE

Sub.
15/11/20
AE

26/11/20
EE

RWD SUB DIVISION-CHHATAPUR

RWD SUB DIV.
CHHATAPUR

RWD WORKS DIV. TRIVENIGANJ
Executive Engineer
Rural Works Department
Work Division, Triveniganj

Technically approved for Rs 11,55,533.00
(Rupees Eleven Lac fifty five thousand five hundred
thirty three only)

11/07/2021

SE
MADHEPURA

अधीक्षण अभियंता
ग्रामीण कार्य विभाग
कार्य अंचल, रा.

Detailed Estimate

Name of Road:

BRAHAMAN TOLA PMGSY UDHAMPUR BHAGWATIPUR TO RAMTOLA.

Sl No.	Items of Works	Nos.	L (m)	B (m)	D (m) IN (Av.)	Quantity (m3)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.					
		1	46.00	(8.00+6.00)/2	(1.00+2.00+2.00)	805.00
					TOTAL=	805.00
					Total Qty =	805.00
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.					
		1	46.00	(5.50+6.00)/2	0.90	238.05
					Total Qty. =	238.05
3	Construction of granular sub-base by providing well graded material, spreading in uniform layers with tractor mounted grader arrangement on prepared surface, mixing by mix in place method with rotavator at OMC, and					
		1	23.0	5.00	0.15	17.25
4	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.					
		4	3.00	2.50		30.00
					Total Qty. =	30.00


15-11-20
JE

RWD SUB DIV- CHHATAPUR


15/11/20
AE

RWD SUB DIV. CHHATAPUR RWD WORKS DIV. TRIVENIGANJ

Executive Engineer
Rural Works Department
Trivenigala


26/11/20
EE