

कार्यपालक अभियन्ता का कार्यालय
ग्रामीण कार्य विभाग, कार्य प्रमंडल, बाढ़

पत्रांक ५४४ / बाढ़ / दिनांक २८/०५/२१

प्रेषक,

कार्यपालक अभियन्ता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल बाढ़।

सेवा मे,

अपर मुख्य कार्यपालक पदाधिकारी-राह-सायब,
बिहार ग्रामीण पथ विकास अभिकरण, पटना।

विषय :- नई अनुरक्षण नीति-2018 योजना अन्तर्गत आवंटन उपलब्ध कराने के संबंध में।

महाशय,

उपरोक्त विषय के संबंध में कहना है, कि नई अनुरक्षण नीति-2018 योजना अन्तर्गत आवंटन उपलब्ध कराने हेतु विहित प्रपत्र में मॉग पत्र तैयार कर आवश्यक कार्रवाई हेतु संलग्न कर समर्पित की जा रही हैं।

अनु०-यथोक्त।

विश्वासभाजन

28/05/21
कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, बाढ़।

28/05/21

RWD Works Division, BARH

Requisition Format for Scheme Head: MR (3054) Under Bihar Rural Road "New Maintenance Policy 2018" (Initial Rectification and Surface Renewal)

Name of Division:- BARH

S.N	Package No.	Name of Road	Project ID as per MIS	Administrative Approval (A.A) Letter No. & Date	Administrative Approval (A.A)		Agreement Amount (in Lakh)		Agreement No. & Date	Date of Completion as per Agreement	Actual Date of Completion	Value of (in MM/KM)	Thickness of Bitumen Layer (in MM)	Value of Bitumen Content (in %)	Previous Total Allocated Amount (in Lakh)	Up-to-date expenditure as per MIS (in Lakh)	Requisition against work done (in Lakh)	Remarks
					Length (K.M)	Amount (in Lakh)	Initial Rectification with Surface Renewal (in Lakh)	5 Year Routine Maintenance										
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
1	MR-N/19-20/BARH/02	DAULATPUR-BANDHANCHAK	10100102110	1830 & 24-06-2019	2.3	101.607	70.434	18.18113	06/MBD/20 19-20 & 02-11-2019	20-08-2020	-----	2.581739	25		0.00000	0.00000	66.83453	Surface Completed
2	MR-N/19-20/BARH/02	BADLUCHAK-CHOUDRIYANCHAK	10100102078	1830 & 24-06-2019	4.16	195.04	127.792	34.29297	06/MBD/20 19-20 & 02-11-2019	20-08-2020	-----	2.643095	25		0.00000	0.00000	122.26154	Surface Completed

Executive Engineer
RWD Works Division, BARH

[Signature]
28/01/21

FORM GFR 19- A

(See Government of India's Decision (1) below Rule-150)
Form of Utilization Certificate up to the month of April 2021

New Maintenance Policy 2018

State – Bihar

PIU – E.E., R.W.D., Works Div, Barh

Sl. No.	Sanction No. & Date with Amount (in Rs. lacs)	Amount Received (in Rs. lacs)	Particulars
1	Lt. No. 05 Dt. 12.01.2021 Lt. No. 20 Dt. 19.03.2021 Lt. No. 23 Dt. 26.03.2021	30.25000 26.50220 39.06801	Certified that out of Rs. 95.82021 lacs received during the year 2020-21 in favour of E-in-C, RWD, Bihar Patna a sum of 93.16008 lacs has been utilized for the purpose of New Maintenance Policy 2018 Schemes as given in the margin for which it was sanctioned and that the balance of Rs. 2.66013 Lacs remaining unutilized at the end of the period under.
	Total	95.82021	

2. Certified that I have satisfied myself that the conditions on which the grants-in-aid was sanctioned have been duly fulfilled/are being fulfilled and that I have exercised the following checks to see that the money was actually utilized for the purpose for which it was sanctioned.

Kind of Checks Exercised:-

- Works have been supervised by Executive Engineer/Superintending Engineer.
- Periodical inspection has been conducted by Executive Engineer/Superintending Engineer.
- Construction materials have been tested.
- Measurements have been recorded in the MBs and test check conducted by the Assistant.
- All other codal formalities have been observed.

Memo No. /Barh,

Date

Copy Forwarded to Secretary-Cum-Empowered Officer (BRRDA), Patna taking necessary action.

[Signature]
Executive Engineer
Rural Works Department
Works Division, Barh

[Signature]
22/04/21

NAME OF THE ROAD : DAULATPUR TO BADLUCHAK

LENGTH OF THE ROAD : 2.30 KM

PACKAGE NO. : MR-N/19-20/BARH/02

DIVISION : BARH

BLOCK : PANDARAK

AGENCY : EPTOME CONSTRUCTION PVT LTD

Date	Time	Section	Length	Bumps	Speed	OR	UIV	CATEGORY	IRI	Latitude	Longitude	Event			
		No.	in km	in mm	Rate	mm/km	mm/km	ROAD							
2/4/21	11:3:46	67	0.1	310	0	3100	3180	G	4.24	25.378277	85.80808	Speed Breaker	$Y = 0 * X^2 + 0.936 * X + 278.4$		
2/4/21	11:4:16	67	0.1	210	30.3	2100	2244	G	3.11	25.37903	85.808232	Normal	$X = 2000$		
2/4/21	11:4:36	67	0.1	320	30.3	3200	3273	G	4.35	25.379825	85.808703	Normal	$Y = 2150$		
2/4/21	11:4:51	67	0.1	200	30.3	2000	2150	G	2.99	25.38071	85.809007	Normal			
2/4/21	11:5:0	67	0.1	200	30.3	2000	2150	G	2.99	25.38161	85.809325	Normal	(R) RURAL ROAD		
2/4/21	11:5:10	67	0.1	160	30.3	1600	1776	G	2.52	25.38243	85.809493	Normal	Good	Average	Poor
2/4/21	11:5:27	67	0.1	90	30.3	900	1120	G	1.67	25.38339	85.809747	Normal	<4000	4001-5000	>5001
2/4/21	11:5:37	67	0.1	140	30.3	1400	1588	G	2.28	25.384245	85.809882	Culvert			
2/4/21	11:5:47	67	0.1	110	30.3	1100	1308	G	1.92	25.38521	85.81	Normal			
2/4/21	11:6:2	67	0.1	120	30.3	1200	1401	G	2.04	25.3861	85.8101	Normal			
2/4/21	11:6:12	67	0.1	130	30.3	1300	1495	G	2.16	25.387042	85.81008	Normal			
2/4/21	11:6:22	67	0.1	130	30.3	1300	1495	G	2.16	25.387975	85.809998	Normal			
2/4/21	11:6:37	67	0.1	110	30.3	1100	1308	G	1.92	25.38887	85.81	Normal			
2/4/21	11:6:47	67	0.1	140	30.3	1400	1588	G	2.28	25.389775	85.81002	Normal			
2/4/21	11:7:0	67	0.1	100	20.2	1000	1214	G	1.8	25.390722	85.81008	Curve			
2/4/21	11:7:12	67	0.1	160	20.2	1600	1776	G	2.52	25.390942	85.80914	Curve			

6/4/2021
J.C.

6/4/2021
A-G

6/4/2021
A-G

Date	Time	Section	Length	Bumps	Speed	OR	UIV	CATEGORY	IRI	Latitude	Longitude	Event			
		No.	in km	in mm	Rate	mm/km	mm/km	ROAD							
2/4/21	11:7:22	67	0.1	110	30.3	1100	1308	G	1.92	25.391823	85.809073	Normal			
2/4/21	11:7:32	67	0.1	160	30.3	1600	1776	G	2.52	25.392782	85.809192	Normal			
2/4/21	11:7:48	67	0.1	240	20.2	2400	2524	G	3.45	25.393247	85.808703	Curve			
2/4/21	11:8:0	67	0.1	140	30.3	1400	1588	G	2.28	25.393398	85.80771	Normal			
2/4/21	11:8:10	67	0.1	150	30.3	1500	1682	G	2.4	25.39352	85.806632	Normal			
2/4/21	11:8:23	67	0.1	190	30.3	1900	2056	G	2.87	25.393563	85.805673	Normal			
2/4/21	11:8:33	67	0.098	200	30.3	2000	2150	G	2.99	25.393532	85.805218	Normal			
TOTAL			2.298	3820	636.3	38200	42150		59.38	583.90802	1973.60409				
AVERAGE						1660.87	1832.609		2.581739						


 09/04/2021
 A.E


 09/04/2021
 A.E


 09/04/21
 A.E

Name of Customer:
 Name of Work/ Road:
 Lab Job number:
 Date:
 Section No.

Test Date:
 Machine No.:
 Start S No.:
 Start E No.:
 Weather:
 Start Location:
 End Location:
 Road Name:
 Road Type:
 Side:
 UIV Range: To Interval
 Dist Range: To
 Equation:


Print Generate Report and Graph

Redraw Graph

Map View

File: C:\Users\SHAZI\Desktop\67.Xls. Section No.: 67. Egn:

Name of Customer: EPTOME CONST PVT LTD, Name of Work/ Road: DAULATPUR TO BADLUCHAK Lab Job

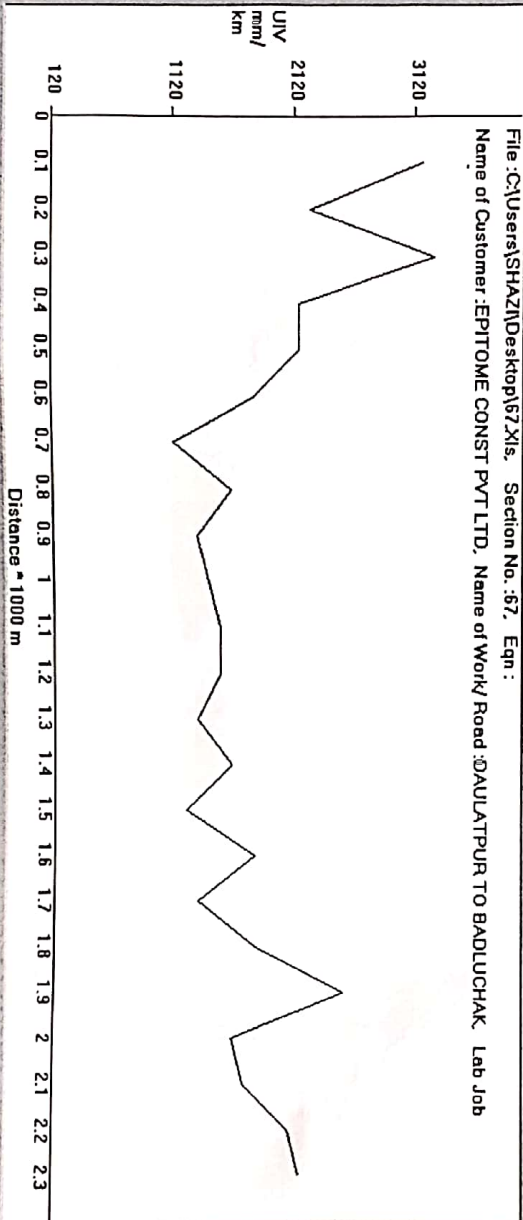

RBH
21/09/2021
A.E

RBH
21/09/2021
A.E

RBH
21/09/2021
A.E

3054 MB

Schedule XLV-Form No. 134
Donatpar to Bandhandhak (Badhuchak)

DIVISION

Agency — Epikame Conf. Rpt. 14el.

SUB-DIVISION

Measurement Book

408

Name of work—
 Situation of work—
 Agency by which work is executed—
 Date of measurement—
 No. and date of agreement.

1

(These four lines should be repeated at the commencement of the measurements relating to each work.)

Particulars	Details of actual measurement				Contents of area
	No.	L.	B.	D.	

1st on A/C Bill
 H/W:- constr & five years maintenance
of Road from Daulatpur to Ben-
chanchak (Bachhachak) in perada-
rak Block under MR.
 Agency:- Epithm constr pvt Ltd.
305 Agency Vihar, Near Janghna
Apartment, Gurgaon road perada.
 Ag No - 06/MB/D/2019-2020.
 Date of start - 21.11.2019

Date of completion - 20.08.2020.

Ag value - Rs

Package no. - MR-14/19-20/Bachh/02

Rate - 0.70% Below.

Recess Measurement

① clearing & grubbing road land
including uprooting wild vegetation
grass etc etc

2 x 25 x 30 x 1.0 = 1500.00

2 x 28 x 30 x 1.0 = 1680.00

2 x 23 x 30 x 1.0 = 1380.00

2 x 1 x 20 x 1.0 = 40.00

4600.00m²

= 0.46 Hect.

.9

Continuation

BASIC COST		W/ mines material	
W/SB -	168.48 m ³		
Stone cgg	26.5 mm to 9.5 mm		
	75.82 m ³ @ Rs. 550.85/m ³		
Stone cgg	9.5 mm to 2.36 mm		
	53.913 m ³ @ Rs. 411.53/m ³		
Local sand	- 85.924 m ³		
	@ Rs. 116.85/m ³		
Stone metal	63 mm to 45 mm		
	136.00 m ³ @ Rs. 427.19/m ³		
Stone s/c type B	11.2 mm -		
	166.632 m ³ @ Rs. 345.52/m ³		
Batching material	(moorum) -		
	8.922 m ³ @ Rs. 131.28/m ³		

Scanned by CamScanner