

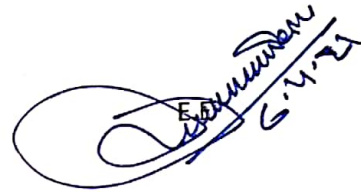


Abstract of cost for Restoration work of Basant Path (Ashogi Bazar) to Piprahi Punarwasi after flood 2020.

Sl. No.	Item of work	Unit	Quantity	Rate	Amount
1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.				
	(a) Bricks bat	cum	140.7	1546.00	217522.20
	(b) Rubbish	cum	35.17	742.00	26096.14
			Total		243618.34
			Add 1% labour Cess		2436.18
			Add 12% GST		29234.20
			Grand Total		275288.72
			Say Rs		275280.00



J.E.


A.E.


S.E.

यह प्रावजन अधीन आशुता कार्य अंश सलामदी द्वारा
गदित अचिदस (कार्यपालक अशुता सलामदी) के अधिपतिवेदन
254/29-1-21


Technically Approved for Rs 275280.00 (Rupees Two
Lakh Seventy five thousand Two hundred Eighty)
Only.

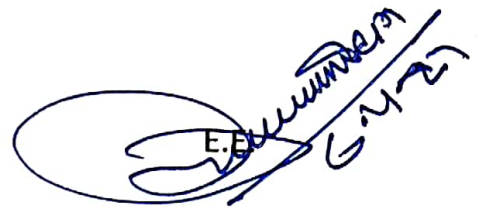

S.E.
R.W.D. (w) Circle
Sitamohi

Detailed Estimate of Restoration work of Basant Path (Ashogi Bazar) to Piprahi Punarwas after flood 2020.

sl no. 1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.				
	chainage in M	length in M	width in M	depth in M	Quantity in cum
	0	10.00	3.80	0.50	19.00
		30.00	3.30	0.45	44.55
		17.00	3.40	0.30	17.34
	200	15.00	3.50	1.00	52.50
		12.00	3.20	0.60	23.04
		18.00	3.60	0.30	19.44
					175.87
(a)	Brick Bats 80%				140.70
(b)	Local Sand/ Rubbish 20%				35.17


J.E.


A.E.


E.E.