

GOVERNMENT OF BIHAR

UNDER FLOOD DAMAGE REPAIR

Estimate for Restoration of Traffic

DISTRICT :	WEST CHAMPARAN	BLOCK :	SIKTA
YEAR(2020-2021)			
NAME OF ROAD :	L040 DHANKUTWA MANDIR CHOWK TO JAGIRIYA TOLA		
Total Length	:	0.057	KMS
Cost of Pavement (Rs.)	:	593614.97	
Total Cost Of Road (Rs.)	:	593614.97	
SUBMITTED BY			
Executive Engineer RWD			
Works Division, Narkatiaganj			

कार्यपालक अभियन्ता का कार्यालय

ग्रामीण कार्य विभाग, कार्य प्रमंडल, बगहा-2

पत्रांक-.....954...../ बगहा-2, दिनांक-.....24/12/2020/

प्रेषक:-

कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, बगहा-2।

सेवा में,

अधीक्षण अभियन्ता,
ग्रामीण कार्य विभाग,
कार्य अंचल, बेतिया।

विषय:-

वर्ष 2020 के बाढ़ में क्षतिग्रस्त पथों को मोटरेबुल कराने हेतु किये गये कार्यों की जाँच के संबंध में।

प्रसंग:-

भवदीय पत्रांक-1312/बेतिया, दिनांक-26.08.2020।

महाशय,

उपर्युक्त विषयक एवम् प्रासंगिक पत्र के अनुपालन में कार्य प्रमंडल, नरकटियागंज द्वारा उपलब्ध कराये गये मोटरेबुल पथों की सूची में अंकित पथों का अधोहस्ताक्षरी द्वारा सहायक अभियन्ता श्री दिगम्बर झा एवम् श्री नन्द किशोर साह के साथ निरीक्षण किया गया। निरीक्षण के दौरान कार्य प्रमंडल, नरकटियागंज द्वारा प्रतिवेदित सभी पथों पर कार्य कराया गया है एवम् यातायात चालु है।

सादर सूचनार्थ एवम् अग्रेत्तर कार्रवाई हेतु समर्पित।

अनु०:- निरीक्षण किये गये पथों की सूची।


24/12/20

(दिगम्बर झा)
सहायक अभियन्ता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, बगहा-2

(नन्द किशोर साह)
सहायक अभियन्ता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, बगहा-2

विश्वासभाजन,


24/12/20

(आनन्द बिहारी झा)
कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, बगहा-2

ज्ञापांक-.....954...../बगहा-2 दिनांक-.....24/12/2020/

प्रतिलिपि:- कार्यपालक अभियन्ता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, नरकटियागंज को सूचनार्थ सम्प्रेषित।


24/12/20

कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, बगहा-2

FINAL DPR LIST IN FDR SCHEME

Sl No	Block	Name of Road	Length (Km)	Estimated Cost
1	Chanpatiya	Bettiah Yogapatti Road to Parsa	0.357	21,22,988.00
2	Chanpatiya	Chandrika paswan to Buchhi Yadav	0.057	99,113.00
3	Chanpatiya	Chhardiwali Chowk to Chhardiwali	0.04	2,67,301.00
4	Chanpatiya	Chhote Lal Sha to Bhikhari Sah	0.097	25,42,099.00
5	Chanpatiya	Girish Lal to Mohan Sah turha	0.115	1,69,495.00
6	Chanpatiya	Kaithwalia Lauriya to Mehnakuli	0.074	5,24,382.00
7	Chanpatiya	Kaithwalia Lauriya to Pokhariya	0.024	1,79,398.00
8	Chanpatiya	Kurwa Kothi to Mahna via Chuhari	0.214	7,53,615.00
9	Chanpatiya	Mahaveer Mandir to School	0.024	5,70,964.00
10	Chanpatiya	Mainatand Mukhya Path to Prajapati Uchh Vidhyalay	0.034	6,15,831.00
11	Chanpatiya	Ramadhar Mahto to Bangali Colony Mor	0.049	5,61,949.00
12	Chanpatiya	Ramnarayan Sah to Nandlal Sah	0.02	82,395.00
13	Chanpatiya	RCC Culvert Pipra to Near River	0.972	24,47,863.00
14	Chanpatiya	Satrudhan Pandey to Shiv Mandir	0.037	2,34,733.00
15	Chanpatiya	T02 to Barharwa	0.048	3,25,190.00
16	Chanpatiya	T04 to Bakuchhiya	0.198	6,28,114.00
17	Chanpatiya	T06 to Barka Gaun	0.267	25,07,612.00
18	Chanpatiya	T04 to Mishrauliya	0.025	2,34,386.00
19	Chanpatiya	Turhapatti to Gurwalia Vishwash	0.022	1,48,939.00
20	Chanpatiya	Naya toala Hariharpur (RCC Culvert) to Mandir (Chip tola)	0.154	2,42,770.00
21	Chanpatiya	Raj Mohamad Miyan to Mohar Yadav	0.021	2,32,381.00
22	Mainatand	Done Canal to Barwa Parsauni	0.498	14,50,164.00
23	Mainatand	Done Canal to Padariya	0.125	24,42,253.00
24	Mainatand	Hardiya to Pachgachhiya	0.026	2,47,186.00
25	Mainatand	Jabdi to Shahpur Parsa	0.18	16,78,496.00
26	Mainatand	Marjadwa to Balirampur	0.054	14,36,783.00
27	Mainatand	Pipra Santpur to Dhobni	0.029	6,02,444.00
28	Mainatand	T01 Sebya to Bhangaha Parsauni	0.018	7,30,916.00
29	Sikta	Ekdeyari to Biraith ghat	0.202	13,86,397.00
30	Sikta	Gauripur to Bairagiya	0.216	10,25,368.00
31	Sikta	Guleriya to Mushahar toli	0.085	14,42,091.00
32	Sikta	L040 Dhankutwa Mandir Chowk to Jagiriya	0.057	5,93,614.00
33	Sikta	L040 to Lakhaure	0.151	9,52,753.00

**(RURAL WORKS DEPARTMENT, GOVT. Of BIHAR)
COST ESTIMATE FOR traffic Restoration**

Name of Road: L040 DHANKUTWA MANDIR CHOWK TO
District: JAGIRIYA TOLA
 WEST CHAMPARAN

Block: SIKTA
 Cutting length 57.00 M

S. No.	SOR Item No.	Description	No	Length (M)	Width (M)	H/D (M)	Qty.	Unit	Rates (in Rs.)	Amount
1	2.13. C	Removal of Hume pipe								
		Removing all types of Hume pipes and stacking within a lead of 1000 m including Earthwork and Dismantling of Masonry Works as per Technical Specification Clause 202.								
			0	2.50		1	0.00			
							0.00	M	381.23	0.00
2		Providing and laying reinforced cement concrete pipe NP3 for culverts on first class bedding of granular material in single row including fixing collar with cement mortar 1:2 but excluding excavation, protection works, backfilling, concrete and masonry								
			0	2.50		1	0.00	M	4744.43	0.00
3	3.3	(B) EARTHWORK Construction of Embankment with Material Obtained from Roadway cutting								
		Construction of embankment with approved materials deposited at site from roadway cutting and excavation from drain and foundation of other structures graded and compacted to meet requirement of Tables 300.1 and 300.2 as per Technical Specification Clause 301.5 excluding C.P.								
		As per measurement					0.000	Cum.	25.32	0.00

Name of Road: L040 DHANKUTWA MANDIR CHOWK TO
JAGIRIYA TOLA
District: WEST CHAMPARAN

Block: SIKTA
Cutting length 57.00 M

S. No.	SOR Item No.	Description	No	Length (M)	Width (M)	H/D (M)	Qty.	Unit	Rates (in Rs.)	Amount
4	RCD	Placing Tractor at loading point, loading with front end loader, dumping, turning for return trip, excluding time for haulage and return trip excluding C.P. including Carriage								
		As per measurement								
5	RCD	Laying brick bats on prepared soil surface as per Specification & direction of Engineer Incharge								
		As per measurement								
6	RCD	Laying Jhama metal on prepared soil surface as per Specification & direction of Engineer Incharge								
		As per measurement								
7	RCD(12.9)	Laying filled sand bag stitching and placing etc all complete as per specification and direction of Engineer Incharge								
		Total Road work								497127.07
		Add GST @12%								59655.25
		Add Labour Cess @1%								7158.63
		Add Seigniorage Fee @ 10% of basic material rate								29674.03
		Total Cost of work								593614.97

[Signature]
20/12/20

[Signature]
20/12/20
JE

Technical approval for Rs (5,93,614 = 500) (Rupees Five lakhs ninety three thousand Six hundred fourteen) only

20/12/20

[Signature]
अधीक्षण अभियन्ता
ग्रामीण कार्य विभाग
कार्य अंचल बेतिया।

Detailed Measurement (Bricks Bat)

No	L(m)	W(m)	D(m)	Qty(cum)
1	30	$(3.8+4.2)/2$	$(1.7+1.3)/2$	180.000
1	27	$(3.6+3.3)/2$	$(1.4+1)/2$	111.780
TOTAL	57			291.78

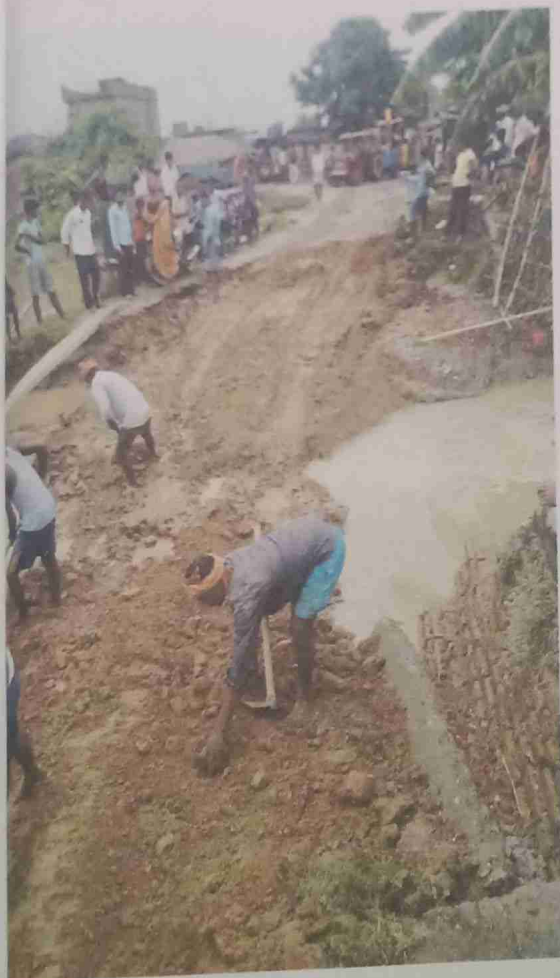

20/12/20
JE


20/12/20
AE


20/12/20
EE



कुटवा मंदिर से जगीरीया टोला



20/12/20
05

RSD
20/12/20
AE