




ग्रामीण काय विभाग

Rural Works Department, Govt of Bihar

ESTIMATE FOR EMERGENT REPAIR FOR RESTORATION OF TRAFFIC

PDR (Temporary)
Bihar (बिहार) Map

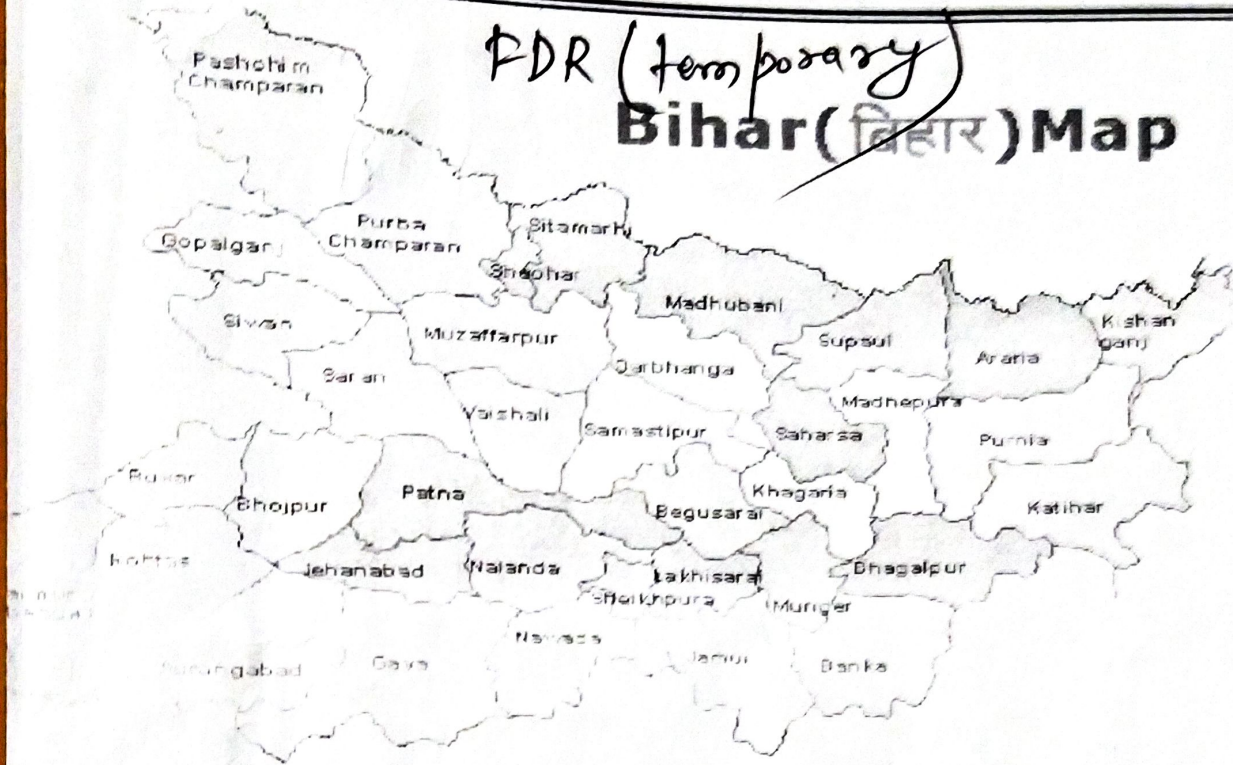

Name of the Road :-

Tehta To Newari

	:	Jehanabad	
DISTRICT	:	Jehanabad	
DIVISION	:	Makhdumpur	
BLOCK	:	7.529	Lac
TOTAL COST OF RESTORATION	:		

Submitted By:
Executive Engineer
RWD WORKS DIVISION
Jehanabad

GENERAL ABSTRACT OF COST

NAME OF ROAD : Tehta To Newari

DISTRICT Jehanabad
BLOCK Makhdumpur
DIVISION Jehanabad
LENGTH OF ROAD (in Km) 0.000
CD STRUCTURES

Sl. No.	DESCRIPTION	AMOUNT (LAKHS)
PART-A	RESTORATION COST	
1	Brick Bat Filling	5.435
2	Hume Pipe 1000mm Dia	0.849
3	Sand Bag with Sand	0.000
	SUB TOTAL OF Restoration	6.284
	LABOUR CESS 1% of cost	0.063
	GST 12 % of cost	0.754
	SEIGNIORAGE FEE @ 10 % on Minor Mines	0.428
	TOTAL OF Restoration	7.529
	TOTAL COST OF PROJECT IN LACS =	7.529

4.08
0.88
4.94 Lacs
0.0494
0.5928
0.322
5.9042 Lacs
5.904 Lacs

10/11/2021
RWD

10/11/2021
RWD


27.11.2021
RWD

Technically approved for Rs. 5.904 Lakh
Rupees 200 Crore Five Lakh
Ninety thousands hundred only

S.E.
R.W.D (W) Circle
Aurangabad

15. F → Rs 5.904 lakh

Provisionally Technically Sanctioned for Rs 5.904 lakh
Rupees Zero Crore Five lakh Ninety
thousand Four Hundred Zero only


The stamp is a circular official seal with the text 'S.E.' and 'W.D. No.' visible, partially obscured by a large handwritten signature in blue ink.

बाक क्षतिग्रस्त पथों का अन्तर प्रमंडलीय जाँच प्रतिवेदन हेतु प्रपत्र।

मैल

निरीक्षी पदाधिकारी का नाम एवं पदनाम :- श्री 213 एन एलएफ — कार्यपालक अभियंता
निरीक्षण की तिथि :- 24/11/21 मासिक मंत्र विभाग
कार्य प्रगति अंकल
पथ का नाम (शीर्ष के साथ) :- Telta to Newari
पथ की लम्बाई :- 9.23 किमी
पथ प्रमंडल का नाम :- Jelantabad.
पथ का नाम :- Mukadumpur.
पथ की स्थिति :- (पूर्ण / On going)
पथ अनुरक्षण अवधि में है :- (Yes/No) हाँ
क्षतिग्रस्त भाग की लम्बाई :- 32.00 M.

क्षतिग्रस्त भाग में कराये गये कार्य का विवरणी :-
(लम्बाई x चौड़ाई x गहराई)

Brick Bat.

$$\textcircled{1} 32.00 \times 5.433 \times 1.667 = 289.78 \text{ m}^3$$

$$\textcircled{11} \text{Hume pipe, 1000mm, 2 rows.}$$

$$6 \times 2.50 = 15.00 \text{ M.}$$

Temporary Restoration में किस-किस :-
सामग्रियों का उपयोग किया गया है,
किसका विवरणी

Brick Bat एवं Hume pipe

स्थिति :-

निरीक्षी पदाधिकारी का हस्ताक्षर
पदनाम सहित