


(7)

RURAL WORKS DEPARTMENT

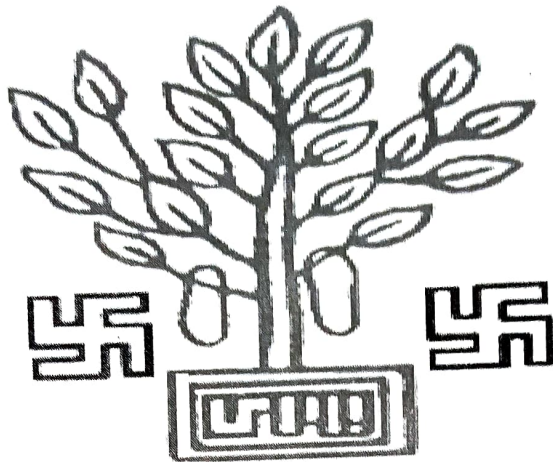

GOVERNMENT OF BIHAR

NAME OF ROAD:-

KAMALPUR TO UFRAIL

DIVISION:-

R.W.D, WORKS DIVISION, FORBESGANJ

CIRCLE:-

R.W.D, WORK CIRCLE, KISHANGANJ

BLOCK:-

RANIGANJ

ESTIMATED COST

445424.00

Inspection Report for flood damage work

Date:

1.Name of PIUs-

2.Name of Block/Road-

A.For Road

1.Damage Location/Chainage :

2. Damage Lengh :

3.Nature of Damage :

4.Details of Restoration :

i Material being used in Restoration :

ii Equipment/Tools being used in Restoration works:

iii Procedure taken up in Restoration works :

iv Restored Length :

B. For Bridge

1.Damage Location/Chainage :

2. Damage Lengh :

3.Nature of Damage :

4.Details of Restoration :

i Material being used in Restoration :

ii Equipment/Tools being used in Restoration works:

iii Procedure taken up in Restoration works :

iv Restored Length :


Signature of JE/AE/EE




Signature

(Name of Inspector)

Abstract of Cost

Name of Work : Estimate for Repairing/Restoration/Making Motorable Roads
Damaged during flood in 2020 in ARARIA District

Name of Road:

KAMALPUR TO UFRAIL

Block: RANIGANJ

District: ARARIA

Division : RWD, Works Division, FORBESGANJ

Circle: RWD, Work Circle, KISHANGANJ

SI No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.				
		Cum	212.63	1870.43	397700.18
	TOTAL AMOUNT =				397700.18
	ADD 12.00 %GST=				47724.02
	SAY TOTAL AMOUNT =				445424.20

445424.00



JE

RWD SUB DIVISION-RANIGANJ



AE

RWD SUB DIV.
RANIGANJ



EE

RWD WORKS DIV. FORBESGANJ

Technically Approved for Rs 4,45,424 - in
Choppers four lacs forty five thousand
four hundred twenty four only



Superintending Engineer
Rural Works Department
Works Circle, Kishanganj

SE
KISHANGANJ

Detailed Estimate

Name of Road:

KAMALPUR TO UFRAIL

Sl No.	Items of Works	Nos.	L (m)	B (m)	D (m) IN (Av.)	Quantity (m ³)
4	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.					
		1	105.00	4.50	0.45	212.63
					Total Qty. =	212.63

[Signature]

JE

[Signature]
AE

EE

RWD SUB DIV- RANIGANJ

RWD SUB DIV. RANIGANJ RWD WORKS DIV. FORBESGANJ

NAME OF ROAD:- **RESTORATION OF ROAD FROM JUMMAN CHOWK TO RAMPUR ROAD TO DURGA MANDIR VIA**

Analysis for Carriage by Road & Rail

Block :- Forbesganj

Araria

District:-

Sl No	Item with Source	Unit	Source	Pukka / Surface		Katcha		Loading & Unloading Cost	Carriage Cost by Rail Head	Total	Min Total
				8.00 4.99	x 7.52	x 20.00 Km = Rs 241.12	8.00 4.99	x 18.19	x 0.00 Km = Rs 0.00		
2	Stone Metal Gr-III/GSB (Pakur by Rail 254 Km)	Cum	Mirzachowki	8.00 4.99	x 7.52	x 55.00 Km = Rs 663.09	8.00 4.99	x 18.19	x 0.00 Km = Rs 0.00	189.26	Rs 1799.83
5	Course Sand	Cum	Jagdishpur	8.00 4.99	x 7.52	x 348.00 Km = Rs 4195.53	8.00 4.99	x 18.19	x 0.00 Km = Rs 0.00	102.59	Rs 4298.12
7	Local Sand	Cum	Local	8.00 6.29	x 16.27	x 8.00 Km = Rs 165.55	8.00 6.29	x 25.43	x 1.00 Km = Rs 32.34	102.59	Rs 300.48
8	Brick	1000 Nos	Local	8.00 6.29	x 16.27	x 8.00 Km = Rs 165.55	8.00 6.29	x 25.43	x 1.00 Km = Rs 32.34	188.21	Rs 386.10
9	Cement	MT	Forbesganj	8.00	x 7.52	x 25.00 Km = Rs 188.00	8.00	x 18.19	x 0.00 Km = Rs 0.00	309.64	Rs 497.64
13	Hume Pipe (1000 mm)	M	Rampur	8.00 10.00	x 16.27	x 0.00 Km = Rs 846.04	8.00 10.00	x 25.43	x 1.00 Km = Rs 20.34	96.59	Rs 962.97

Cost of Haulage Excluding Loading & Unloading as per SOR

Type of Road	Per Ton. Km by TRACTOR	Per Ton. Km by TRUCK
For Surface Road	16.27	7.52
Unsurface Gravel Road	20.33	9.04
Kachha Road	25.43	18.19

6/11/20

Forbesganj

6/11/20