

Inspection Report For Flood Damage Work

Date:

1. Name of PIUs: R.W.D. gapalganj-2
2. Name of Block/Road: Barauli/Khajuriya Go Shiyasura.

A For Road


1. Damage Location/ Chainage: Road
2. Damage Length: 163. M
3. Nature of Damage: Flood damage.
4. Details of Restoration Works: Bricks bats, Gractor labour etc -
i. Material being used in Restoration Works: Gractor labour etc -
ii. Equipments / Tools being used in Restoration Works: As per S.O.P.
iii. Procedure taken up in Restoration Works: As per S.O.P.
iv. Restored Length: 163.00 M


B For Bridge

1. Damage Location / Chainage: N.A.
2. Damage Length: N.A.
3. Nature of Damage: N.A.
4. Details of Restoration Works:
i. Material being used in Restoration Works:
ii. Equipments / Tools being used in Restoration Works:
iii. Procedure taken up in Restoration Works:
iv. Restored Length:


JE

AE


EE


Signature
(Name of inspector)



Edit with WPS Office



ग्रामीण कार्य विभाग

Rural Works Department, Govt. of Bihar

FLOOD DAMAGED REPAIR (F.D.R.)

STATE :- BIHAR
DISTRICT :- GOPALGANJ
BLOCK :- BARAULI

Khajuriya To Shiyarura

ESTIMATED COST - RS. 693900.00

SUBMITTED BY :-
EXECUTIVE ENGINEER
RWD (W) DIVISION
GOPALGANJ-2

Report

Name of Work

:- Motorable work of Khajuriya To Shiyarura

Estimated Cost

:- 693900.00

Total length of Road

:- 4.000 km

Description

:- The present estimate has been farmed under the supervision of Assistant engineer in accordance with the order of Executive Engineer, RWD, WD Gopalganj-2, letter No. - 1574 dated 18-08-2020. The part of above mentioned road has been damaged due to heavy rain/flood. And due to this damage the transporation has been obstructed. The immediate motorable work is necessary in public interest. Villagers will be benefitted by the completion of this motorable work.

In the estimate there has been a provision of repairing the damaged part of the road & making it motorable by filling brickbats. In the context of post flood scenario there is still the flow of water which prevails through the damaged part of the road.

In this estimate the rate of raw materials and labour wages has been prepared after the analysis of new rate. This estimate is as per the specifications. The estimate is devoted to technical and administrative acceptance.

Rajesh
24/11/2020
J.E.

A.E.

28/11/20
E.E.

**Detailed Estimate For Motorable Work in Road from Khajuriya To Shiyarura
damaged due to Heavy rain/flood for year 2020-2021**

r.	Items	No.	L (M.)	W (M.)	D (M.)	Qty.	Unit	Rate	Amount
1	Providing brick bats billed in ditches including all cost of labour & material with all complete job.								
	CH - 50 M to 2000 M	1	15.00	1.50	1.00	22.50	M3		
		1	27.00	3.00	1.50	121.50	M3		
		1	12.00	2.00	1.00	24.00	M3		
		1	9.00	1.50	1.50	20.25	M3		
		1	19.00	2.00	1.00	38.00	M3		
		1	17.00	2.50	0.30	12.75	M3		
		1	30.00	1.50	0.30	13.50	M3		
		1	20.00	2.00	0.50	20.00	M3		
		1	14.00	1.50	0.50	10.50	M3		
	Less for H.P.	0	1.23	1.23	0.95	0.00	M3	2427.65	682627.65
						283.00	M3	2427.65	687024.95
2	Providing & laying 1000 MM Dia NP3 Hume Pipe in single row -do-do- complete job.	0	2.50			0.00	M	4159.56	0.00
								682627.65	687024.95
								682627.65	6870.25
	Add 1 % Contingency							Total	693895.20
								Say	693900.00

689953

Supts 6.895 Lacs

28/12/2020
J.E.

A.E.


28/12/20
E.E.

Technically Approved for Rs 6.895 Lacs (Rupees Six Lacs Eighty Nine
Thousand & Five Hundred only)

28/12/21
अधीक्षण आचार्य


प्रमाण पत्र विभाग कार्य आचार्य, लखनऊ

28/12/21

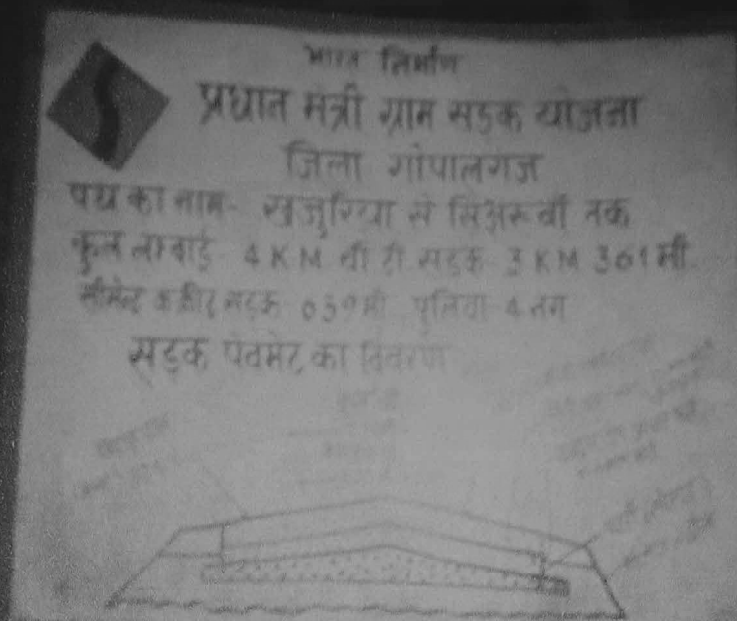

Latitude: 26.379153
Longitude: 84.6221
Elevation: 101.95 m
Accuracy: 1.8 m
Time: 01-16-2021 19:07
Note: khajuriya to shiyarura

Powered by NoteCam

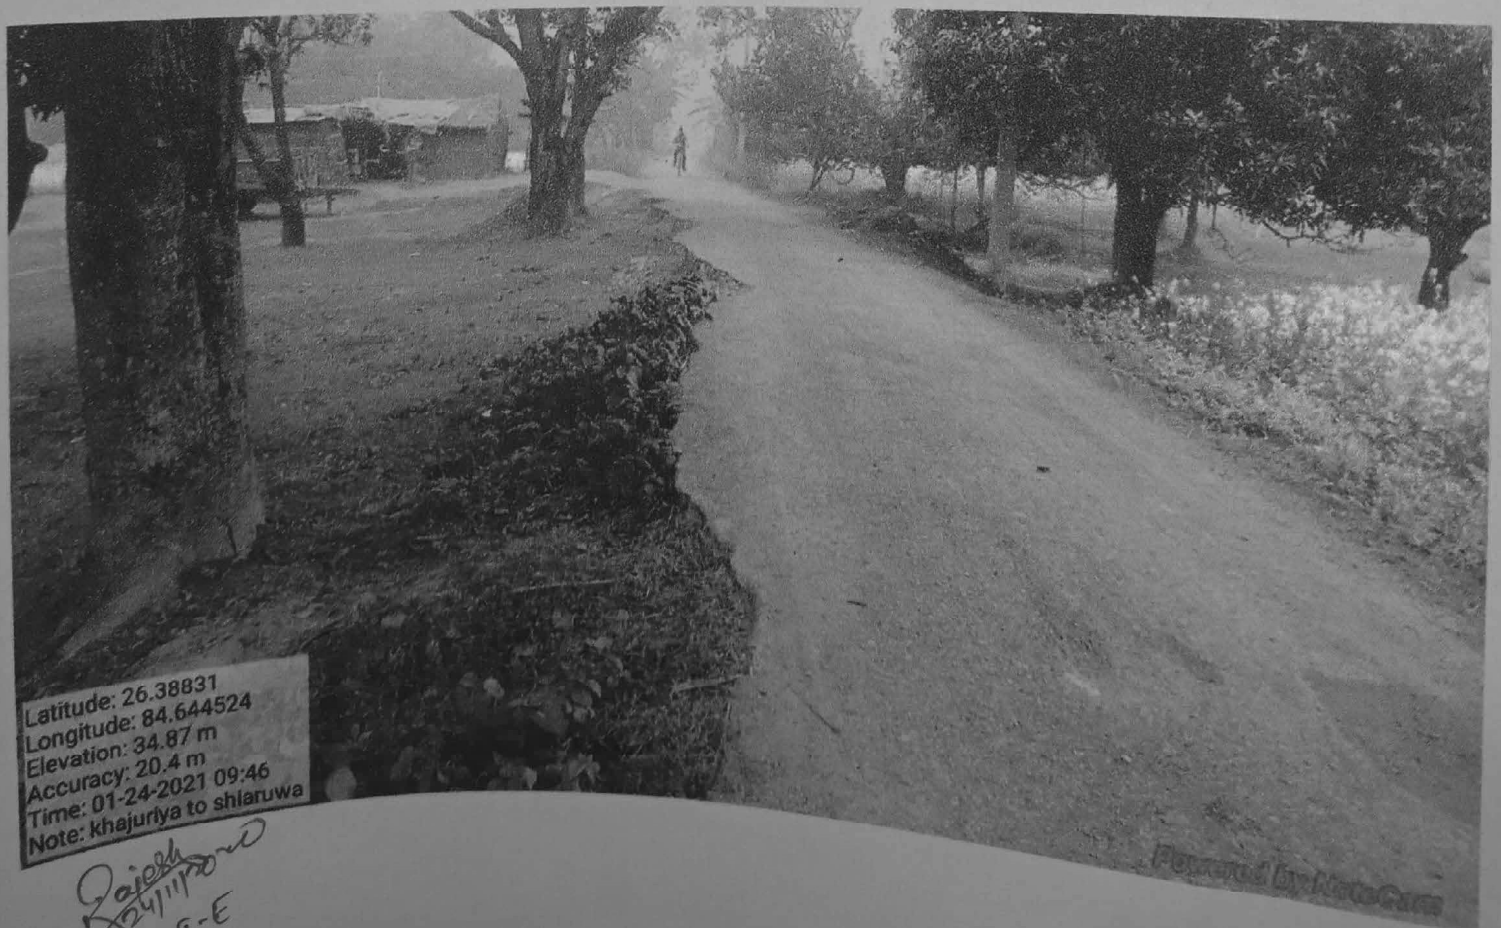

Latitude: 26.38831
Longitude: 84.644524
Elevation: 34.87 m
Accuracy: 20.4 m
Time: 01-24-2021 09:46
Note: khajuriya to shikharwa

Rajesh
24/1/2021
S-E

Powered by NoteCam



Latitude: 26.389859
Longitude: 84.636187
Elevation: 71.82 m
Accuracy: 28.9 m
Time: 01-24-2021 09:40
Note: khajuriya to shiaruwa

Powered by NoteCam



Latitude: 26.386087
Longitude: 84.631541
Elevation: 58.91 m
Accuracy: 4.3 m
Time: 01-24-2021 09:31
Note: khajuriya to shiaruwa

Powered by NoteCam

Signature