

प्रतिवेदन

कार्य का नाम:- शमशेर चौक से लालपुर मरीचा

पथ में अप्रत्याशित बाढ़/अतिवृष्टि 2020 से क्षतिग्रस्त पथ में यातायात चालू करने हेतु आपातकालीन मरम्मत कार्य।

प्रखण्ड- कुर्हनी
वित्तीय वर्ष - 2020-2021
प्राक्कलित राशि - Rs. 13.579 लाख

प्रस्तुत प्राक्कलन जिसकी प्राक्कलित राशि रु० 13.579 लाख कार्य प्रणाल्य मुजफ्फरपुर पूर्व-1, प्रखंड-कुर्हनी में यातायात बहाली हेतु आपातकालीन मरम्मत के लिए तैयार किया गया है।

अभियंता प्रमुख, ग्रामीण कार्य विभाग, बिहार पटना के पत्रांक 2521 दिनांक 05.08.2020 द्वारा दिये गये निर्देश के आलोक में उक्त पथ के क्षतिग्रस्त पथ में Brick Bats & Local Sand भरकर पथ को चालू करने का प्रावधान किया गया है। प्राक्कलन वर्तमान चलू अनुसूचित दर पर तैयार किया गया है। इसकी घटनोत्तर स्वीकृति अपेक्षित है।

10/11/20
कनीय अभियंता

K Amblesh
10/11/20
सहायक अभियंता,
R.W.D. Works Sub Division
Kurhani

22-11-20
कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमंडल मुजफ्फरपुर
पूर्व-1

Inspection Report for Flood Damage Work

Date


- 1 Name of PIUs- EXECUTIVE ENGINEER RWD (W) DIV. Muzaffarpur East-1
- 2 Name of Block/Road- Kudhani/Rampur chowk Se Sahpur Maricha


A For Road

- 1 Damage Location/Chainage At Many palaces
- 2 Damage Length 353.48M
- 3 Nature of Damage Complete road blocked due to breached of road due to flood water.
- 4 Details of Restoration Works-
 - i Material being used in Restoration Works- Bricks bats
 - ii Equipments/Tools being used in Restoration Works- Statics roller, tractor of road due to flood water.
 - iii Procedure Taken up in Restoration Works- Immediate repairs for water restoration.
 - iv Restored Length 353.48M

B. For Bridge

- 1 Damage Location/Chainage
- 2 Damage Length
- 3 Nature of Damage
- 4 Details of Restoration Works-
 - i Material being used in Restoration Works-
 - ii Equipments/Tools being used in Restoration Works-
 - iii Procedure Taken up in Restoration Works-
 - iv Restored Length


Signature of JE/ AE/ EE


Signature
(Name of Inspector)

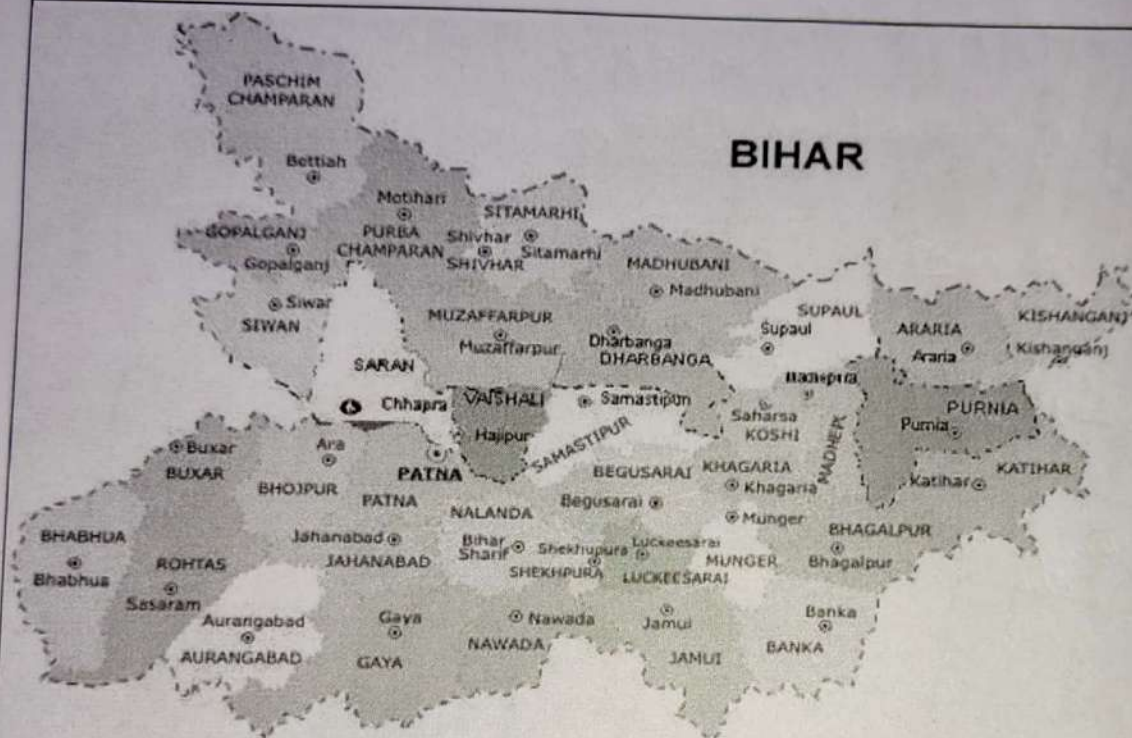
Scanned with CamScanner



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

DETAILED PROJECT REPORT FOR FDR



Name of the Road :-

Rampur chowk se Sahpur Maricha

DISTRICT

Muzaffarpur

DIVISION

Muzaffarpur East-1

BLOCK

Kurhani

TOTAL LENGTH OF ROAD

:

7.400

KM

CONSTRUCTION COST

:

13.579

Lac

Submitted By :- Executive Engineer
RWD Work Division Muzaffarpur East-1

GENERAL ABSTRACT


of the Road :- Rampur chowk se Sahpur Maricha
District Muzaffarpur
Block Kurhani
Division Muzaffarpur East-1


7.4 KM

Length of Road (in Km)


Sl. No.	DESCRIPTION	AMOUNT (LAKHS)
1	Jhama metal / Brick Bat	13.579
2	Sand Filling	0.000
3	Sand bag	0.000
4	Bamboo Piles	0.000
	GRAND SUB TOTAL	13.579
TOTAL COST OF PROJECT IN LACS =		13.579



JE
RWD


AE
RWD


EE
RWD

Technically Approved for Rs 13.579 lacs (Rupees
Thirteen lacs fifty seven thousand nine hundred only)


Superintending Engineer
R.W.D, WORKS CIRCLE
MUZAFFARPUR


31.12.20

Name of the Road :- Rampur chowk se Sahpur Maricha

Sl. No.	SDB SL NO	MORD Ref. No	Description	Unit	QUANTITY	RATE	AMOUNT (in Rs.)
1		13.7 SoR Bihar Govt. (1985)	Jhama metal / Brick Bat Labour for consolidation in Jhama metal by Road Roller in proper grade camber and super elevation dry and wet rolling including cost of running charge of roller diver and khalasi making and maintaining diversion light barrier - do - do - danger signal etc. Including cost of labour and Materials all complete				
			Appendix - I	Cum	667.8		
				Total	667.83	2033.34	1357931.89
2		11.20	Sand Filling Filling in foundation trenches as per drawing and technical specification Clause 305.3.9				
			Appendix - II	Cum	0.000		
				Total	0.00	454.53	0.00
Total Cost :-							1357931.89


10/11/20
S.E

K. Anubhai
10/11/20
A.E


22.12.20
Executive Engineer
R.W.D. Works Division
Muzaffarpur East-1

Name of Road :- Rampur Chowk to Sahpur Maricha

Comparative Statement

S.N	Item of Work	Unit	Quantity (in cum)	Rate Quoted By Hira Infrastructure Bhagwampur Muzaffarpur		Rate Quoted By Manoj Kumar Bhagwampur, Nuntar, Muzaffarpur		Rate Quoted By Pihu Construction Dhummagar, Dhafari, Deoriya Kothi, Muzaffarpur	
				Rate (in Rs.)	Amount (in Rs.)	Rate (in Rs.)	Amount (in Rs.)	Rate (in Rs.)	Amount (in Rs.)
1	Providing and Laying of Brick Bats.	3	4	5	6	7	8	9	10
1	Labour for consolidation in Jhama metal by Road Roller in proper grade camber and super elevation by and wet rolling including cos of running charge of roller driver and khilasi making and maintaining diversion light barrier -do-do-danger singal etc. including cost of labour and materials all complete.	Cum	667.83	2033.30	1357898.74	2036.30	1359902.23	2039.30	1361905.72
Total Amount				L1	1357898.74	L2	1359902.23	L3	1361905.72
Say					1357899.00		1359902.00		1361906.00

C/S Prepared by

[Signature]
30/08/20
A.E./R.W.D
Kudhari

C/S Recommended by

[Signature]
16/11/20
D.A.O.

C/S Recommended by

[Signature]
16/11/20
E.E.

Approved

[Signature]
Superintending Engineer
RWD, Works Circle
Muzaffarpur

Lowest rate quoted by Hira Infrastructure and amount is 1357899.00
(i.e. thirteen lakh fifty seven thousand eight hundred ninety nine only)
Hence quotation