

RURAL WORKS DEPARTMENT



GOVERNMENT OF BIHAR

CIRCLE – R.W.D. works Circle, Chapra

DIVISION – R.W.D. works Division , Chapra-2

Name of Work - Restoration/Motrable of Road from Gandar se
Prarthmik Garhi

Block - Isuapur

Estimated cost - Rs 1408363.00

Year : 2020-21

Inspection Report for Flood damage work

Date:

1. Name of PIUs-

2. Name of Block/Road- Istkefur - Restoration / Motorable of Road from
Gandar to Prathmik garh.

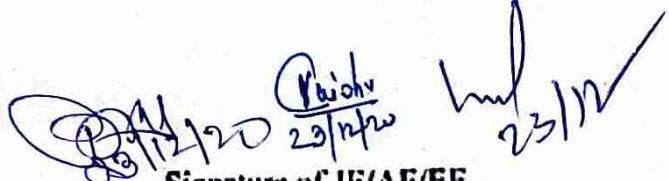
A. For Road

1. Damage Location/Chainage : In Istkefur partly damaged
2. Damage Length : 135m, 140m, 110m, 145m
3. Nature of Damage :
4. Details of Restoration :

i Material being used in Restoration : Brick bats, local sand
ii Equipment/Tools being used in Restoration works: Tractor, Road Roller
iii Procedure taken up in Restoration works :
iv Restored Length : 560 m.

B. For Bridge

1. Damage Location/Chainage :
2. Damage Length :
3. Nature of Damage :
4. Details of Restoration :
i Material being used in Restoration :
ii Equipment/Tools being used in Restoration works:
iii Procedure taken up in Restoration works :
iv Restored Length :


Signature of JE/AF/EE


Signature
VINOD KUMAR
(Name of Inspector)
Executive Engineer
W.D. (W) Division Chapra-1

प्रतिवेदन

कार्य का नाम :- Restoration/Motable of Road from Gandar se Prathmik Gorkh
शीर्ष :- FDR
प्राक्कलित राशि:- 14,08,363=00
प्रखण्ड का नाम:- Isuapur जिला-सारण।


प्रस्तुत प्राक्कलन शीर्ष PMGSY/MMGSY/GTSNY/NABARD/MR-3054 अर्तगत निर्मित/निर्माणाधीन पथ के गत महीने में इस जिला में आये बाढ़/अतिवृष्टि के कारण क्षतिग्रस्त हुए पथों को चलने लायक (Motarable) बनाने हेतु विभागीय दिशा-निर्देशानुसार कार्यपालक अभियंता, ग्रा0का0वि0, कार्य प्रमंडल Chapra-2 के दिशा-निर्देशन में कुल रु0 14,08,363=00 के लिए तैयार किया गया है।

आवश्यकतानुसार तत्काल प्रभाव से पथों को चलने लायक बनाने हेतु प्राक्कलन में Bricks Bats, Sand Bag, Hume-Pipe इत्यादी का प्रावधान आवश्यक लम्बाई, चौड़ाई एवं मोटाई में प्राक्कलन के अनुसार प्रावधान किया गया है।

योजना एवं कार्य की महत्ता के साथ-साथ जनहित के लिए अतिउपयोगी प्राक्कलन को कार्यहित में स्वीकृति हेतु प्रस्तुत किया जा रहा है।


23/12/20


23.12.20
AC


कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, Chapra-2।


ABSTRACT OF COST

Name of Work - Restoration/Mottrable of Road from Gandar se Prarthmik Garhi


Block - Isuapur

S.L No.	Particulars	Amount (In Rs.)
A	Cost of Restoration work	Rs 1246339.00
B	Add 12 % GST on (A)	Rs 149561.00
C	Add 1 % L. Cess on (A)	Rs 12463.00
	Total Cost	Rs 1408363.00


J.E.
RWD
Chapra-2


A.E.
R.W.D
Chapra-2


E.E.
R.W.D
Chapra-2

T/A work 1408363 = (fourteen lakh eight
thousand three hundred sixty three rupees only)



Detailed Estimate

Name of work :-

Restoration/Motrable of Road from Gandar se Prarthmik Garhi

SI No	Item	No	Length	Width	Avg.H/D	Qty	Unit	Rate	Amount
1	Providing laying and spreading brick bats in Road ditches all complete as per approved design, specifications and direction of E/I	1	135.00	4.45	0.20	120.15			
		1	170.00	4.34	0.27	199.21			
		1	110.00	4.17	0.277	127.06			
		1	145.00	4.19	0.24	145.81			
		Total					592.23	cum	1909.87
2	Filling and spreading local sand over brick bats as per drawing and technical specification Clause 305.3.9	1	135.00	4.45	0.10	60.08			
		1	170.00	4.34	0.10	73.78			
		1	110.00	4.17	0.10	45.87			
		1	145.00	4.19	0.10	60.76			
		Total					240.49	cum	479.27
TOTAL								1246339.00	


 J.E.
 RWD
 Chapra-2


 A.E.
 R.W.D
 Chapra-2


 E.E.
 R.W.D
 Chapra-2