


DETAILED PROJECT REPORT FOR FDR

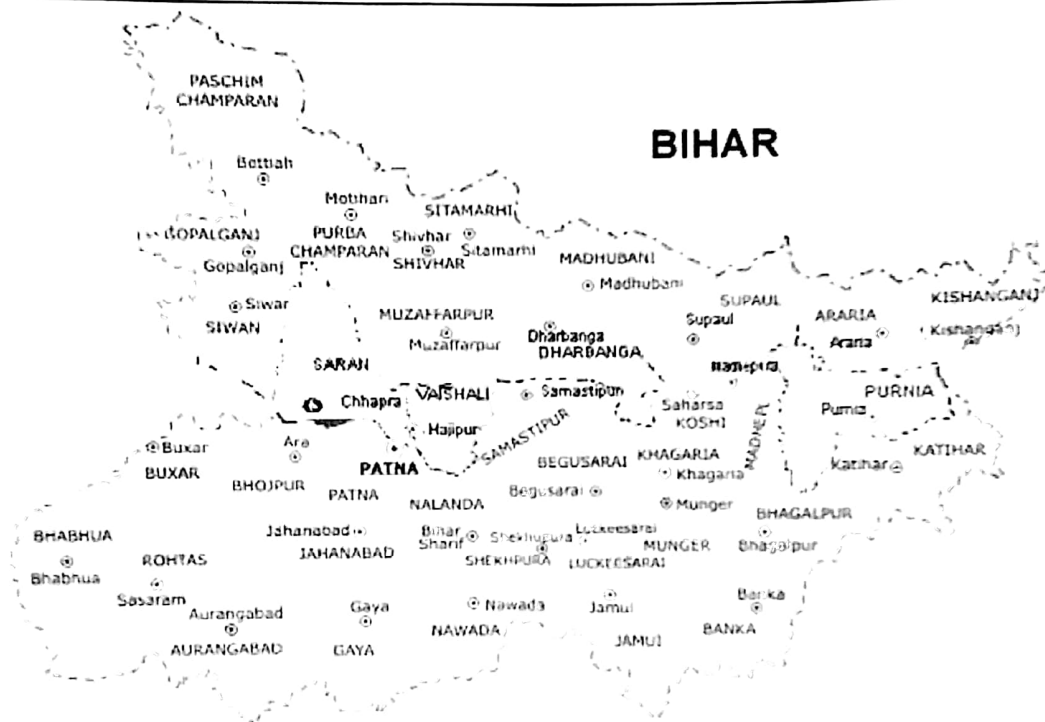

Name of the Road :-		T02 to Sundarpur Ratwara Harijan Tola		
DISTRICT		Muzaffarpur		
DIVISION		Muzaffarpur East-1		
BLOCK		Bandra		
TOTAL LENGTH OF ROAD		:	1.069	KM
CONSTRUCTION COST		:	2.378	Lac

**Submitted By :-
Executive Engineer
RWD Work Division Muzaffarpur East-1**

प्रतिवेदन

कार्य का नाम:- IL-2 से सुन्दरपुर रतवारा हरिजन दोला

..... पथ में अप्रत्याशित बाढ़/अतिवृष्टि 2020 से क्षतिग्रस्त पथ में यातायात चालू करने हेतु आपातकालीन मरम्मत कार्य।

प्रखण्ड- बन्दरा

वित्तीय वर्ष - 2020-21

प्राक्कलित राशि - Rs. 2,348 लाख

प्रस्तुत प्राक्कलन जिसकी प्राक्कलित राशि 2,348 लाख है, कार्य प्रमण्डल मुजफ्फरपुर पूर्वी-1, प्रखण्ड बन्दरा में यातायात बहाली हेतु आपातकालीन मरम्मत के लिए तैयार किया गया है।

अभियंता प्रमुख, ग्रामीण कार्य विभाग, बिहार पटना के पत्रांक 2521, दिनांक 05.08.2020 द्वारा दिये गये निर्देश के आलोक में उक्त पथ के क्षतिग्रस्त पथ में ईट लुकड़ा म्यानीय बाधु भरकर पथ को चालू करने का प्रावधान किया गया है। प्राक्कलन वर्तमान चलू अनुसूचित दर पर तैयार किया गया है। इसकी चटनोत्तर स्वीकृति अपेक्षित है।

Suma
11.11.2020

कनीय अभियंता

ग्रामीण कार्य विभाग

कार्य प्रशासक बन्दरा

Suma
11.11.2020

सहायक अभियंता

ग्रामीण कार्य विभाग

कार्य श्वर प्रमण्डल बन्दरा

Suma
15.12.20

कार्यपालक अभियंता

ग्रामीण कार्य विभाग

कार्य प्रमण्डल मुज0

पूर्वी-1

Inspection Report for Flood Damage Work

Date

- 1 Name of PIUs- EXECUTIVE ENGINEER RAD (W) DIV. Muzaffarpur East-1
2 Name of Block/Road- Baidya / Tola to Sunderpur Baidya
Harnigan Tola.

A For Road

- 1 Damage Location/Chainage At many places
2 Damage Length 57.00 m
3 Nature of Damage Complete traffic block due to breach of road.
4 Details of Restoration Works-
i Material being used in Restoration Works- Brick Bat, local Sand
ii Equipments/Tools being used in Restoration Works- Road Roller, Tractor
JCB, Manual
iii Procedure Taken up in Restoration Works- JCB, Manual
mediate traffic restoration.
iv Restored Length 57.00 m

B. For Bridge

- 1 Damage Location/Chainage
2 Damage Length
3 Nature of Damage
4 Details of Restoration Works-
i Material being used in Restoration Works-
ii Equipments/Tools being used in Restoration Works-
iii Procedure Taken up in Restoration Works-
iv Restored Length

N/A

Signature of JE/ AE/ EE

Signature
(Name of Inspector)

GENERAL ABSTRACT

me of Road T02 to Sundarpur Ratwara Harijan Tola

istrict Muzaffarpur

ck Bandra

vision Muzaffarpur East-1

ngth of Road (in Km) 1.069 Km

No.	DESCRIPTION	AMOUNT (LAKHS)
1	Jhama metal	2.314
2	Sand Filling	0.063
3	H.P.	0.000
4	Bamboo Piles	0.000
	GRAND SUB TOTAL	2.378
OTAL COST OF PROJECT IN LACS =		2.378

[Signature]
11.11.2022
JE
RWD

[Signature]
11.11.2022
AE
RWD

[Signature]
15.12.20
EE
RWD

Technically approved for Rs. 237800 = 00 (Rs. Two lakhs thirty seven thousand eight hundred only).

[Signature]
12.12.20
SE, RWD
Muzaffarpur

Sl. No.	SDB SL NO	MORD Ref. No	Description	Unit	QUANTITY	RATE	AMOUNT (in Rs.)
1		13.7 SoR Bihar Govt. (1985)	Jhama metal Labour for consolidation in Jhama metal by Road Roller in proper grade camber and super elevation dry and wet rolling including cost of running charge of roller diver and khalasi making and maintaining diversion light barrier - do - do- danger signal etc. all complete .				
			Appendix - I	Cum	113.81		
				Total	113.81	2033.34	231414.43
2		11.20	Sand Filling Fillling in foundation trenches as per drawing and technical specification Clause 305.3.9				
			Appendix - II	Cum	13.970		
				Total	13.97	454.53	6349.78
Total Cost :-							237764.21

Bhuv
11.11.2020
JE

11.11.2020
A JE

15.12.20
JE