

Inspection Report for Flood Damage Work

Date:

1. Name of PIUs RWD, works Division, Gopalganj-2
2. Name of Block/Road - Sidhwa/ Kateyola to Kashi tangrahi

A. For Road

1. Damage Location/Chainage :
2. Damage Length : 606 M
3. Nature of Damage : Road partially wash out
4. Details of Restoration Works :
 - i. Material being used in Restoration works : Brickbats, Earth
 - ii. Equipments/Tools being used in Restoration works: JCB, Tractor with Trolley
 - iii. Procedure taken up in Restoration works :
 - iv. Restored Length : 606 M

B. For Bridge

1. Damage Location/Chainage :
2. Damage Length :
3. Nature of Damage : NA
4. Details of Restoration Works :
 - i. Material being used in Restoration works :
 - ii. Equipments/Tools being used in Restoration works: NA
 - iii. Procedure taken up in Restoration works :
 - iv. Restored Length :


JE


AE


EE


Signature
Executive Engineer
(Name of Inspector)
Hathua

Report.

Name of work : - Kateya tola to kashi tangrahi

Estimated Cost :- Rs 1399920.00

Total length of road :- 7.03 KM

Description :- The present estimate has been framed under the supervision of Assistant engineer in accordance with the order of Executive Engineer , RWD , WD Gopalganj-2 , letter no – 1574 dated 18-08-2020. The part of above mentioned road has been damaged due to heavy rain/flood. And due to this damage the transportation has been obstructed . The immediate motorable work is necessary in public interest . Villagers will be benefitted by the completion of this motorable work.

In the estimate there has been a provision of repairing the damaged part of the road & making it motorable by filling brickbats. This provision has a purpose to put a check on the erosion of embankment along the road .

In this estimate the rate of raw materials and labour wages has been prepared after the analysis of new rate. This estimate is as per the specifications. The estimate is devoted to technical and administrative acceptance.


18-09-20
J.E.


18/09/20
A.E.


23/9/20
E.E.

Detailed Estimate For Motorable Work in road from Kateya tola to kashi tangrahi
damaged due to Heavy rain / Flood for Year . 2020-2021

| Sr. | Items | no. | L (M.) | W M.) | D (M.) | Qty. | unit | rate | Amount |
|-----|--|------|--------|-------------|--------|---------|----------------|---------|--------------|
| 1 | Providing brick bats billed in ditches including all cost of Labour & Material with all complete job . | | | | | | | | |
| | Near Railway Dhala | | | | | | | 2412-11 | 108545.00 |
| | CH- 3600 | 1 | 6.00 | 3.75 | 2.00 | 45.00 | M ³ | 2427.65 | 109244.25 |
| 2 | Construction of embankment with material obtained from borrow pits with lead upto 1000 m -do do-as per T/S | | | | | | | | |
| | | 2x10 | 30.00 | 1.00+4.00/2 | 1.50 | 2250.00 | M ³ | | |
| | | 2x10 | 30.00 | 1.00+5.00/2 | 2.00 | 3600.00 | M ³ | | 1276821.00 |
| | | | | | | 5850.00 | M ³ | 218.26 | 1276821.00 ✓ |
| | | | | | | | | 1385366 | 1386065.25 |
| | Add 1% contingency | | | | | | | 13854 | 13860.65 |
| | | | | | | | | Total | 1399925.90 |
| | | | | | | | | Say | 1399920.00 |

Say Rs 13.992 Lacs

[Signature]
18-09-20
JE

[Signature]
18/09/20
AE

[Signature]
23/9/20
EE

Technically Approved for Rs 13.992 Lacs (Rupees Thirteen Lacs.
Ninety Nine Thousand & Two Hundred) only


[Signature]
24/10/20
u



~~18-09-20~~
18-09-20
J.E.

18/09/20
AK

Kateya tola to kashi tangrahi

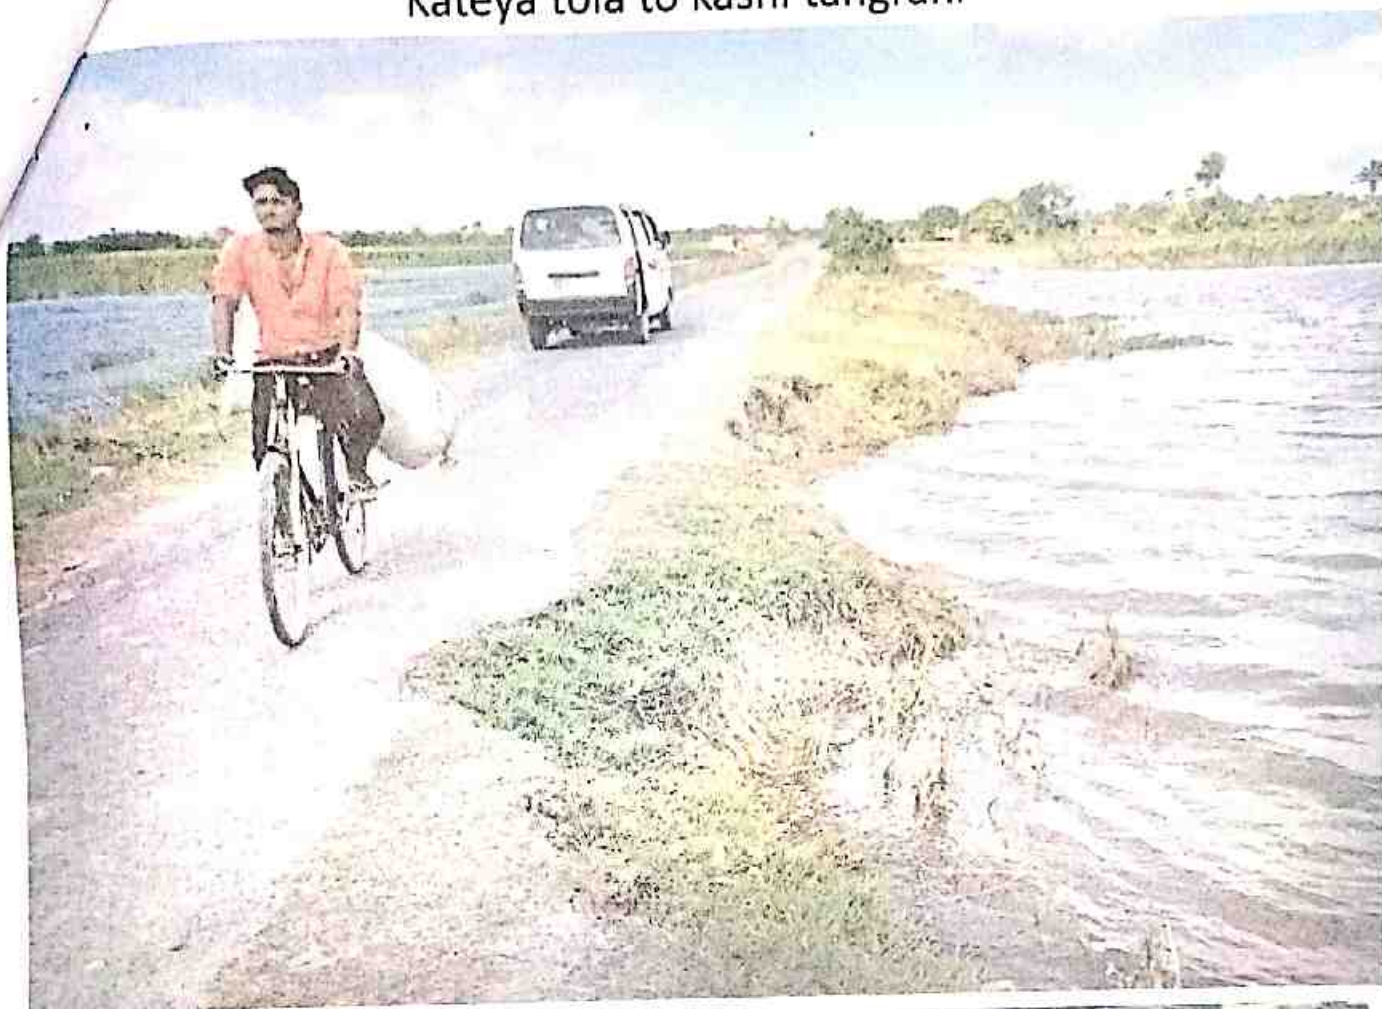

~~18-09-20~~
J. E

18/9/20
AL