

Inspection Report For Flood Damage Work

Date :

1 Name of PIUs : Gopalganj - 2

2 Name of Block/Road : Baikunthapur / P.M.G.S. Azad Nig, Ke chauri TO
Khafeelater Shukla Talg

A For Road

1 Damage Location / Chainage : 400 m to 1300 m

2 Damage Length : 327 m

3 Nature of Damage : Heavy Rain / Flood

4 Details of Restoration Works:

i. Material being used in Restoration Works: Brick Bats

ii Equipments / Tools being used in Restoration Works: JCB, Tractor, Trolly, Belcha, shawl
Roller

iii Procedure taken up in Restoration Works: Yes

iv Restored Length: 327 m

B For Bridge

N/A

1 Damage Location / Chainage:

2 Damage Length:

3 Nature of Damage:

4 Details of Restoration Works:

i. Material being used in Restoration Works :

ii Equipments / Tools being used in Restoration Works :

iii Procedure taken up in Restoration Works:

iv Restored Length :

[Signature]
JE

[Signature]
25.05.2020
AE

[Signature]
25/5/20
EE

[Signature]
10/12
Executive Engineer
(Name of Inspector)
Hathua

Report

Name of Work :- Motorable work of PMGSY Azad Miya Ke Chimani To Khajuhatti Shukla Tola

Estimated Cost :- ~~1931000.00~~ 1588800.00


Total length of Road :- 1.468 km

Description :- The present estimate has been farmed under the supervision of Assistant engineer in accordance with the order of Executive Engineer, RWD, WD Gopalganj-2, letter No. - 1574 dated 18-08-2020. The part of above mentioned road has been damaged due to heavy rain/flood. And due to this damage the transporation has been obstructed. The immediate motorable work is necessary in public interest. Villagers will be benefitted by the completion of this motorable work.

In the estimate there has been a provision of repairing the damaged part of the road & making it motorable by filling brickbats. In the context of post flood scenario there is still the flow of water which prevails through the damaged part of the road. Hence there has been a provision of laying R.C.C. NP3 1000MM Dia hume pipe.

In this estimate the rate of raw materials and labour wages has been prepared after the analysis of new rate. This estimate is as per the specifications. The estimate is devoted to technical and administrative acceptance.


19/9/2020
J.E.


19.09.2020
A.E.


19/9/20
E.E.

tailed Estimate For Motorable Work in Road from PMGSY Azad Miya Ke Chimani To Khajuhatti Shukla Tola damaged due to Heavy rain/flood for year 2020-2021

Sr.	Items	No.	L (M.)	W (M.)	D (M.)	Qty.	Unit	Rate	Amount
1	Providing brick bats billed in ditches including all cost of labour & material with all complete job.								
	CH - 400 M to 1300 M	1	10.00	1.50	0.30	4.50	M3		
		1	18.00	1.40	1.10	27.72	M3		
		1	12.00	1.30	1.50	23.40	M3		
		1	15.00	1.50	1.30	29.25	M3		
		1	8.00	1.35	1.50	16.20	M3		
		1	12.00	1.10	1.30	17.16	M3		
		1	30.00	1.45 ^{0.90}	1.25	54.38 ^{32.35}	M3		
		1	4.00	6.00	0.60	14.40	M3		
		1	26.00	0.60	1.60	24.96	M3		
		1	29.00	1.30	1.00	37.70	M3		
		1	25.00	2.50 ^{1.65}	1.20	75.00 ^{47.50}	M3		
		1	24.00	1.10	2.50	66.00	M3		
		1	26.00	1.30	1.80	60.84	M3		
		1	28.00	1.40	2.20	86.24 [✓]	M3		
		1	30.00	2.60 ^{1.50}	2.40	187.20 ^{93.60}	M3		
		1	30.00	1.20	1.60	57.60	M3		
		1.58	1.23	1.23	5.00	11.95	M3	2412.11	1521728=0 1551526.92
						770.59	M3	2427.65	1870730.31
2	Providing & laying 1000 MM Dia NP3 Hume Pipe in single row -do-do- complete job.	4	2.50			630.82 10.00	M	2744.50 4159.56	2744.50=0 41595.60
								1549773=0	1573122.52
	Add 1 % Contigency							154972=0	1912325.91 1573122.52 19123.26
						TOTAL 1564665=0	Total		1583855.52 1931449.17
							Say		1931000.00

Say R 17 ^{13.647} 310 tone
Rs. 15,88,800.00

Phul
19/9/2020
J.E.

[Signature]
15.09.2020
A.E.

E.E.



~~Technically Approved for Rs. 19.310 Lacs (Rupees Nineteen Lacs
Thirty one Thousand) only~~

Technically Approved for Rs. 15.647 Lacs (Rupees Fifteen Lacs
Sixty four Thousand & Seven Hundred) only

अधीक्षण अभियंता
नगर कार्य विभाग कार्य अंकन-स्थान
पञ्चम
मल्लिकार्जुन
५


Name of Road :- PMGSY Azad Miya Ke Chimani to Khajuhatti Shukla Tola



Phul
19/05/2020
n

Qina
19-05-2020
H.C.

Name of Road :- PMGSY Azad Miya Ke Chimani to Khajuhatti Shukla Tola

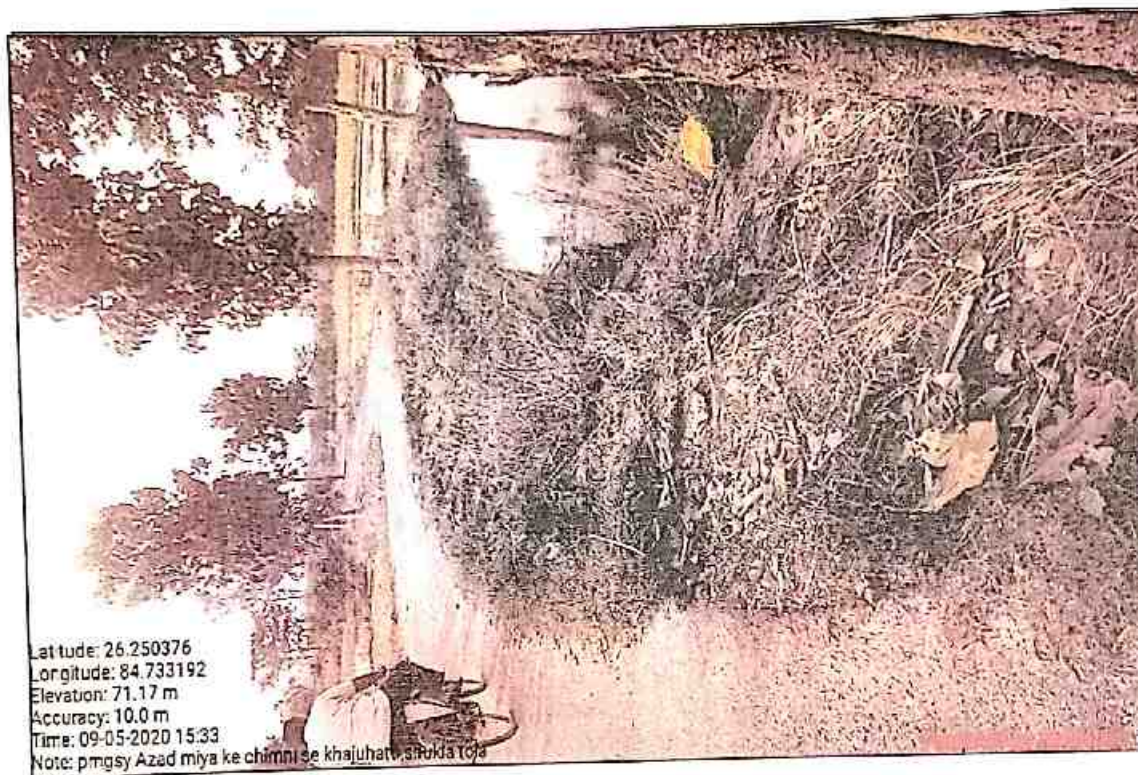

Phil
19/9/2020
N

Simi
19.09.2020
AK