

कार्यपालक अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य प्रमंडल, सिवान-2

पत्रांक.....2159..... सिवान, दिनांक.....29/12/20.....

प्रेषक,

कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, सिवान-2

सेवा में,

सचिव-सह-प्राधिकृत पदाधिकारी
बिहार ग्रामीण पथ विकास एजेन्सी
भूमि विकास बैंक भवन
बुद्ध मार्ग, पटना।

विषय:- योजना शीर्ष नई अनुरक्षण निति 2018 MR/3054 अन्तर्गत पथों में मरम्मत हेतु
अधियाचना के संबंध में।

महाशय,

उपर्युक्त विषयक प्रासंगिक पत्र के आलोक में कहना है कि योजना शीर्ष नई अनुरक्षण
निति 2018 MR/3054 अन्तर्गत संलग्न विहित प्रपत्र में 63.02656 लाख (तीरसठ लाख दो
हजार छः सौ छप्पन) रुपये मात्र आवंटन देने की कृपा की जाय।

अनु0-अधियाचना पत्र, Bump Integrator Equipment Report की छाया प्रति,
एकरारनामा की छाया प्रति,

विश्वासभाजन

29/12/20
कार्यपालक अभियंता
ग्रामीण कार्य विभाग, कार्य प्रमंडल,
सिवान-2

Requisition Format for Scheme Head - MR (3054) Under Bihar Rural Road Maintenance Policy-2018 (Initial Rectification and Surface Renewal)

Name of Works Division :- RWD, WORKS DIVISION, SIWAN-2																		
S.N.	Package No.	Name of Road	Project ID as per MIS	Administrative Approval (AA) Letter No. & Date	Administrative Approval (AA)		Agreement Amount (in Lakh)		Agreement No. & Date	Date of Completion as per Agreement	Actual Date of Completion	Value of IRI (in mm/km)	Thickness of Bitumen Layer (in mm)	Value of Bitumen Content in Percentage	Previous Total Allotted Amount (in Lakh)	Up-to-date expenditure as per MIS (in Lakh)	Requisition against work done (in Lakh)	Remarks
					Length (in Km)	Amount (in Lakh)	Initial Rectification with Surface Renewal (in Lakh)	5 Year Routine Maintenance Maint. (in Lakh)										
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
1	MR-N/19-20 Siwan-2/02	Guthani to Sohagra	31406708029	1877/24.06.2019	11.00	454.1160	284.94236	94.81598	139MBD/19-20 16.01.20	30.12.2020	30.12.2020	Good	25 mm	5.031	273.325	273.325	0	Complete
2		Guthani Darauli Salarao Road to Harpur	31406701003	1877/24.06.2019	2.800	94.5320	58.00427	21.17897	139MBD/19-20 16.01.20	30.12.2020	30.12.2020	Good	25 mm	5.038	40.855	40.855	0	Complete
3		Sohagra Road to Bakulari	31406701006	1877/24.06.2019	1.70	59.8580	36.12334	13.84236	139MBD/19-20 16.01.20	30.12.2020	30.12.2020	Good	25 mm	5.037	36.12334	36.12334	0	Complete
4	MR-N/19-20 Siwan-2/01	Makarwar to Anoni Path	31406701019	1877/24.06.2019	1.800	62.4230	38.17403	14.14724	141MBD/19-20 15.02.20	31.12.19	30.12.2020	Good	25 mm	5.036	34.03423	34.03423	0	Complete
5		PWD Road to Bisawaniya	220001242	1877/24.06.2019	4.40	155.6160	94.14988	36.41117	141MBD/19-20 15.02.20	30.12.2020	30.12.2020	Good	25 mm	5.032	93.90567	93.90567	0	Complete
6	MR-N/19-20 Siwan-2/05	T02 Sarai Via Safi Tola to Amarpur	31406702047	5139/24.09.2019	3.20	111.2009	65.47033	32.86766	105MBD/20-21 17.09.20	16.06.21	30.12.2020	0.00	0	0.000	0.00	0.00	0	
7		PWD Path Se Tarwan Taruwani	31406602033	5139/24.09.2019	3.90	135.8480	80.10775	40.04263	105MBD/20-21 17.09.20	16.06.21	01.11.2020	Good	25 mm	5.031	79.14848	79.14848	0	Complete
8		CMDG Road to Bishwaniya Via Balhu	314671033666	6132/20.11.2019	7.00	254.6024	155.25400	69.47072	105MBD/20-21 17.09.20	16.06.21	30.12.2020	0.00	0	0.000	0.00	0.00	0	
9	MR-N/19-20 Siwan-2/10	Babhanauli to Bargawa Tak Via Kathauliya	31406602016	5139/24.09.2019	6.10	205.2256	125.29266	60.69045	104MBD/20-21 17.09.20	16.06.21	30.12.2020	Good	25 mm	5.031	0.00	0.00	0	Complete
11		L026 to Nautan to Kurmauta (VR10)	31406702033	5139/24.09.2019	2.50	84.4215	51.33843	25.15108	104MBD/20-21 17.09.20	30.12.2020	01.11.2020	Good	25 mm	5.034	50.8059	50.8059	0	Complete
11		Akolohi to Valuhi Via Sishani	31406701001	1877/24.06.2019	3.30	104.8720	64.0953	23.79127	140MBD/19-20 15.02.20	14.11.2020	30.11.2020	0.00	0	0	0.00	0.00	0	
12		Guthani Balua to Mamur Path	31406701014	1877/24.06.2019	2.50	82.9270	51.4269	17.9899	140MBD/19-20 15.02.20	14.11.2020	09.11.2020	Good	25 mm	5.034	40.79	51.41	10.62	Complete

13	MR-N/19 20 Siwan- 2/03	Guthani Darauli Road to Damodara	31406701004	1877/ 24.06.201 9	1.46	48.5180	29.0178	11.53854	140MBD/ 19-20 15.02.20	14.11.2020	30.11.2020	Good	25 mm	5.033	25.8989	26.6948	0.7959	Complete
14		Guthani Mairwa (Takaniya) to Chavariya Path	31406701015	1877/ 24.06.201 9	2.50	80.4920	49.581	17.73496	140MBD/ 19-20 15.02.20	14.11.2020	30.11.2020	Good	25 mm	5.032	0.00	0.00	49.3165	Complete
15		Guthani Nainijore Via Sematar Chilmarwa	31406701005	1877/ 24.06.201 9	1.40	55.3266	28.7748	21.02097	140MBD/ 19-20 15.02.20	14.11.2020	06.11.2020	Good	25 mm	5.032	27.9989	28.77226	0.77336	Complete
16		Guthani Mairwa Path to Kolharua to Bhagwappur via Boheliya	31406701023	1877/ 24.06.201 9	2.40	82.5300	50.2353	18.88126	140MBD/ 19-20 15.02.20	14.11.2020	06.11.2020	Good	25 mm	5.031	45.4859	47.0038	*1.5179	Complete
															748.37316	762.08322	63.02656	

प्रमुख लेखा पदाधिकारी
ग्रामीण कार्य विभाग, कार्य प्रबंधन,
सिवान-2

Executive Engineer
RWD Works Division

Siwan-2
23.12.2020

FORM GFR 19-A

(See Government of India's Decision (I) below Rule-150)
Form of Utilisation Certificate up to 29th December 2020
NEW MAINTENANCE POLICY (2018)

PIU.....

Sl.No	Name of Scheme	Sanction No.& Date with Amount, (in Rs. Lacs)	Amount Received (in Rs. Lacs)	Particulars
1	Construction of Rural roads under NEW MAINTENANCE POLICY (2018)	24/19.03.2020 59/18.08.2020 78/29.10.2020 82/13.11.2020 86/11.12.2020	309.44834 40.85500 127.93990 129.95438 140.17554	Certified that out of Rs 748.37316 lacs received during the years 2020-21 in favour of Ex. Engineer, RWD, Works Division, siwan-2 Bihar, a sum of Rs 748.37316 Lacs has been utilized for the purpose of NEW MAINTENANCE POLICY-2018 Schemes as given in the margin for which it was sanctioned and that the balance of Rs 0.00 lacs remaining unutilized at the end of the period under.
	Total :		748.37316	

2. Certified that I have satisfied myself that the conditions on which the grants-in-aid was sanctioned have been duly fulfilled/are being fulfilled and that I have exercised the following checks to see that the money was actually utilized for the purpose for which it was sanctioned.

Kind of Checks exercised :-


- Works have been supervised by Executive Engineer/Superintending Engineer.
- Periodical inspection has been conducted by Executive Engineer/ Superintending Engineer.
- Construction materials have been tested.
- Measurements have been recorded in the MBs and test check conducted by the Assistant Engineer/ Executive Engineer.
- All other codal formalities have been observed.

3. **Physical Progress achieved :-**

- Construction of Road works.
- Construction of CD works.


DAO

RWD, WORKS DIVISION
SIWAN-2

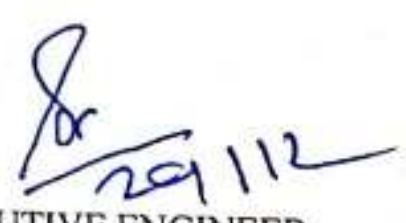
EXECUTIVE ENGINEER
RWD, WORKS DIVISION

SIWAN-2
29.12.2020

Road Name :- Baluwa se Mammaur road

Date	Time	Section No.	Length in km	Bumps in mm	Speed Rate	OR mm/km	IRI CATEGORY mm/km ROAD	Latitude	Longitude	Event
10/11/20	16:37:0	41	0.1	190	0	1900	2068 G	26.16	84.43568	Normal
10/11/20	16:37:17	41	0.1	110	0	1100	1370 G	26.15938	84.44242	Normal
10/11/20	16:38:28	41	0.1	130	0	1300	1545 G	26.15894	84.4507	Normal
10/11/20	16:39:3	41	0.1	250	0	2500	2592 G	26.15844	84.45858	Curve
10/11/20	16:39:39	41	0.1	280	0	2800	2854 G	26.15766	84.46295	Curve
10/11/20	16:40:14	41	0.1	240	0	2400	2505 G	26.15707	84.46885	Curve
10/11/20	16:41:0	41	0.1	170	0	1700	1894 G	26.15673	84.4776	Culvert
10/11/20	16:41:24	41	0.1	140	10.1	1400	1632 G	26.15624	84.48552	Normal
10/11/20	16:42:0	41	0.1	180	10.1	1800	1981 G	26.15593	84.49443	Normal
10/11/20	16:43:0	41	0.1	100	10.1	1000	1283 G	26.15579	84.50387	Curve
10/11/20	16:43:10	41	0.1	180	10.1	1800	1981 G	26.15499	84.50555	Normal
10/11/20	16:43:45	41	0.1	150	10.1	1500	1719 G	26.15409	84.50453	Normal
10/11/20	16:44:21	41	0.1	120	10.1	1200	1457 G	26.15325	84.50202	Culvert
10/11/20	16:44:21	41	0.1	170	10.1	1700	1894 G	26.15242	84.49882	Normal
10/11/20	16:45:0	41	0.1	160	10.1	1600	1806 G	26.1516	84.49545	Normal
10/11/20	16:45:31	41	0.1	210	10.1	2100	2243 G	26.15085	84.49107	Normal
10/11/20	16:46:7	41	0.1	140	10.1	1400	1632 G	26.15	84.48803	Culvert
10/11/20	16:46:42	41	0.1	240	10.1	2400	2505 G	26.14919	84.4845	Curve
10/11/20	16:47:17	41	0.1	190	10.1	1900	2068 G	26.14916	84.47558	Curve
10/11/20	16:48:0	41	0.1	210	10.1	2100	2243 G	26.1494	84.4673	Normal
10/11/20	16:48:28	41	0.1	120	10.1	1200	1457 G	26.14925	84.45958	Normal
10/11/20	16:49:3	41	0.1	120	20.2	1200	1457 G	26.14934	84.44948	Normal
10/11/20	16:49:38	41	0.1	180	0	1800	1981 G	26.14956	84.43955	Curve
10/11/20	16:50:14	41	0.1	190	10.1	1900	2068 G	26.14923	84.43182	Curve
10/11/20	16:51:0	41	0.1	170	10.1	1700	1894 G	26.14901	84.42255	Normal
10/11/20	16:51:24	41	10.1	200	0	2000	2156 G	26.14907	84.41262	Speed Breaker
10/11/20	16:52:0	41	0.1	160	10.1	1600	1806 G	26.14921	84.40638	Normal
10/11/20	16:52:0	41	0.012	20	70.7	1667	1865 G	26.14923	84.40505	Normal

$$Y = 0 * X^2 + 0.873 * X + 410.1$$

$$X = 1667$$

$$Y = 1865$$

(R) RURAL ROAD

Good Average Poor
<4000 4001-5000 >5001


[Signature]
10-11-2020
JE

[Signature]
11/11/2020
Executive Engineer
Rural Work Department
Work Division Shivan-2

Steco Analyzer

Name of Customer :	Shree Vijay Singh	Test Date :	28-Apr-10	Road Name :	Baluwa se Mammaur road
Name of Work/ Road :	Baluwa se Mammaur road	Machine No :	390	Road Type :	(R) RURAL ROAD
Lab Job number :		Start S No :		Side :	
Date :	02-Jun-09	Start E No :		Interval	
Section No. :	41	Weather :		UIV Range :	283 To 4000 1000 mm/km
		Start Location :		Dist Range :	0 To 2.9 0.1 * 1000 m
		End Location :		Equation :	$Y = 0 * X^2 + 0.873 * X + 410.1$

Print Generate Report and Graph Redraw Graph Map View

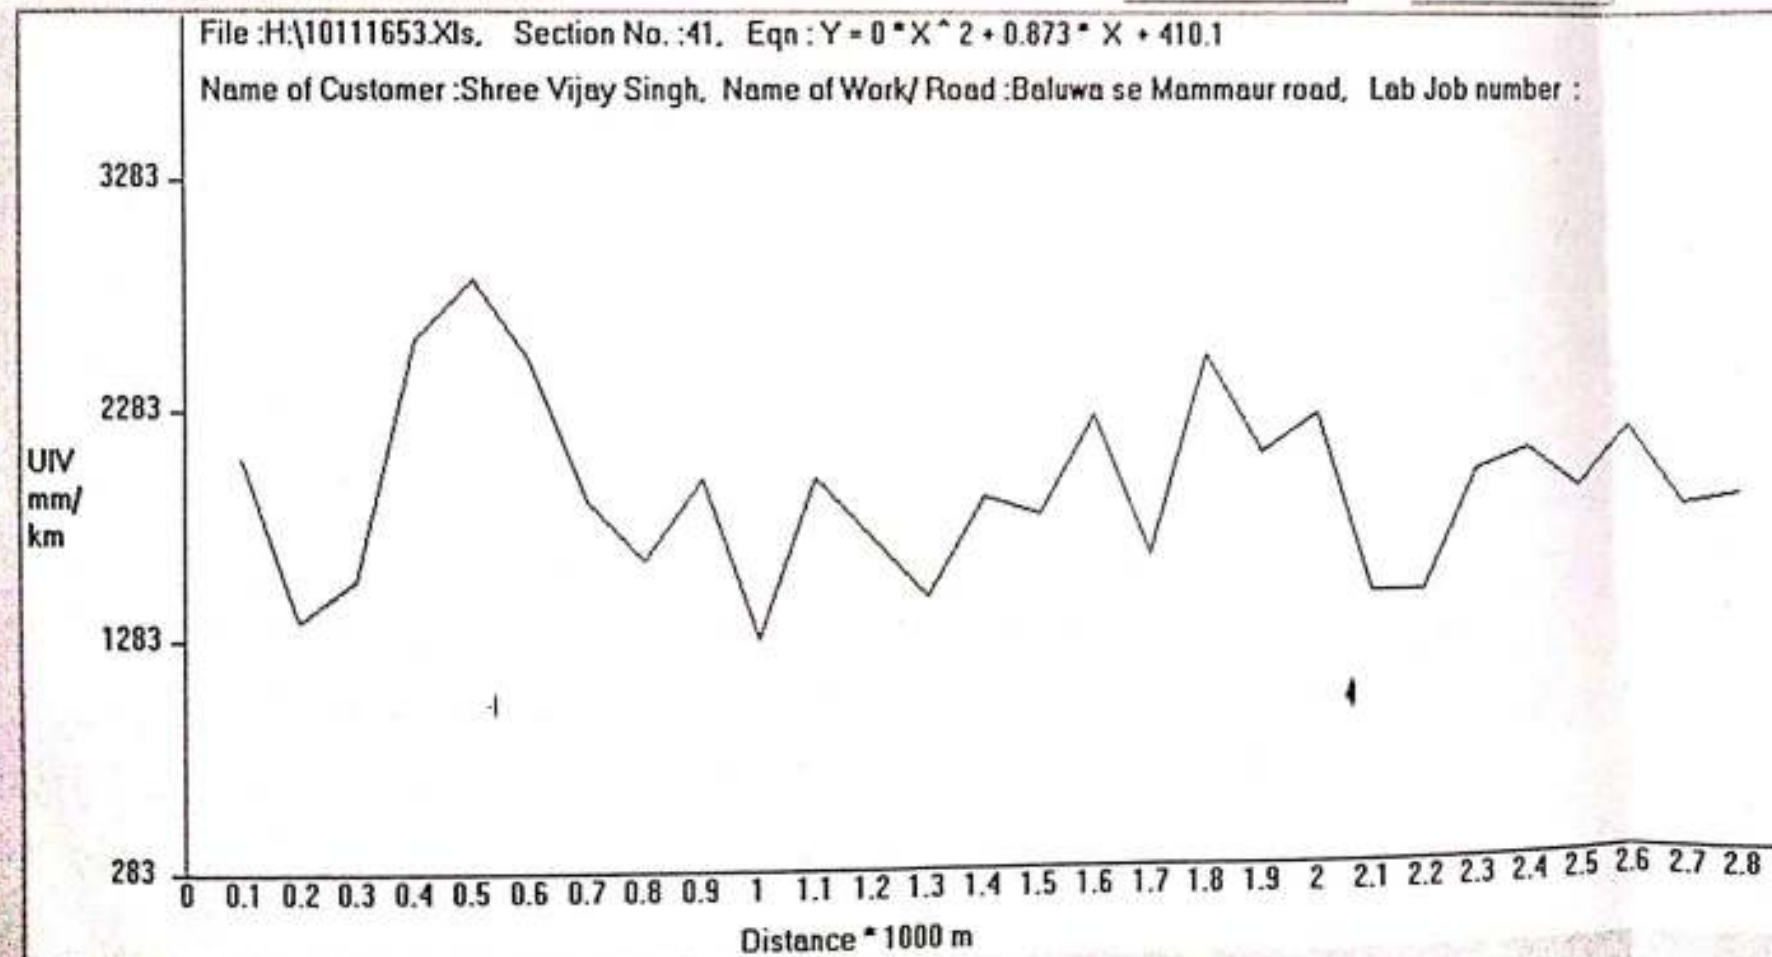

[Signature]
 10-11-2020
 J.E

[Signature]
 11/11/20
 Executive Engineer
 Rural Work Department
 Work Division Shran-2

भारतीय गैर न्यायिक INDIA NON JUDICIAL

एक हजार रुपये

रु.1000

ONE THOUSAND RUPEES

Rs.1000

बिहार BIHAR 7702

विजय सिंह
14-2-2020
Nijay Singh.

AG 309220

जनादन यादव
मुन्नाक विजेता सीमाना
सा. नं-3/98

(A) Standard Form of Agreement

Notes on Standard Form of Agreement

The Agreement should incorporate any correction or modification to the Bid resulting from corrections of errors (Instructions to Bidders, Clause 26)

Work Start Date:- 31.12.19
Work End Date:- 30.09.20

Standard Form: Agreement

(Below-10%)

Agreement No. 14-0... MBD, MR/3054 of 2019-20

This agreement, made the day of November 2017 between EXECUTIVE ENGINEER, RURAL WORKS DEPARTMENT, WORKS DIVISION, SIWAN-2 [name and address of Employer] (hereinafter called "the Employer") of the one part, Vijay Singh, Vill. Srinagar, Po.- Siwan, Dist.- Siwan. [name and address of Contractor] (hereinafter called "the Contractor" of the other part).

Whereas the Employer is desirous that the Contractor execute under MR (3054) in Block-Guthani, Jiradei, Dist- Siwan of Repair of Road From M/R 3054, MR-N/19-20, Siwan-2/03, (Tender ID-79258) (BID ID- 361026) from Length of 13.56 Km and Construction Cost Rs. 27312725.00 + Maintainance Cost for Five Years Rs. 11095690.00 [name and identification number of Contract] (hereinafter called "the Works") and the Employer has accepted the Bid by the Contractor for the execution and completion of such works and the remedying of any defects therein at a cost of Rupees Total 38408415.00 Three Corer Eighty Four Laes Eight Thousand Four Hundred Fifteen Only.

EXECUTIVE ENGINEER
RWD, WORKS DIVISION,
SIWAN-2

15.02.2020