

कार्यपालक अभियंता का कार्यालय,
ग्रामीण कार्य विभाग, कार्य प्रमण्डल, हिलसा।

पत्रांक...../2/.....

/ हिलसा, दिनांक: 13-01-21

प्रेषक

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल, हिलसा।

सेवा में,

नोडल पदाधिकारी,
नई अनुरक्षण निति-2018 (3054),
ग्रामीण कार्य विभाग, बिहार, पटना।

विषय- नई अनुरक्षण निति 2018 शीर्ष 3054 के अंतर्गत वित्तीय वर्ष 2020-21 में व्यय हेतु आवंटन की मांग।

महोदय,

उपर्युक्त विषय के संबंध में नई अनुरक्षण निति 2018 शीर्ष 3054 के अंतर्गत वित्तीय वर्ष 2020-21 में व्यय हेतु संलग्न विवरणी के अनुसार रु० 135.36622 (रु० एक करोड़ पैंतीस लाख छत्तीस हजार छः सौ बाईस मात्र) रुपये का आवंटन उपलब्ध कराने की कृपा की जाए ताकि किये गये कार्यों का भुगतान किया जा सके।
अनुलग्नक :- विहित प्रपत्र में अधियाचना।

विश्वासभाजन

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल, हिलसा।


13/01/21


Requisition Formate for Scheme Head - MR(3054) under Bihar Rural Road Maintenance Policy - 2018 (Initial Rectification and Surface Renewal)

Name of Works Division :-Hilsa

SI No.	Package No.	Name of Road	Project ID as per MIS	Administrative Approval (AA)	Agreement Amount (in Lakh)	Agreement No. & Date	Date of Completion as per Agreement	Actual Date of Completion	Value of IRI (in mm/km)	Thickness of Bitumen Layer (in mm)	Value of Bitumen Content in Percentage	Previous Total Allocated Amount (in Lakh)	up-to-date expenditure against MIS (in Lakh)	Requisition against work done (in Lakh)	Remarks					
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19		
1	RM/NA/HIL/20/0001	Ekangarsarai parwalpur mukhya path se atramchak chora to rasilia tak path marammati	1281033307	5275/04.10.19	1.387	41.40	31.82427	12.90600	02/MBD/20-21	02.12.2020	25.11.2020	3387	25.02	5.18	19.09456	0.00	12.72971			
2	RM/NA/HIL/20/0001	Mushar rasilia road to chakdah	1281033309	5275/04.10.19	1.303	52.496	45.91463	12.00200	02/MBD/20-21	02.12.2020	23.11.2020	3456	25.02	5.17	27.54878	0.00	18.36585			
3	RM/NA/HIL/20/0001	Panchayat Jamuwan ke nischalganj Islampur road to rasilia gaon	1281033308	5275/04.10.19	1.332	54.546	48.22170	12.40900	02/MBD/20-21	02.12.2020	26.11.2020	3288	25.05	5.11	28.93302	0.00	19.28868			
4	RM/NA/HIL/20/0001	Diawan-Berthu Rd. to Pakari	10200802023	5275/04.10.19	1.219	41.162	33.15173	10.56200	02/MBD/20-21	02.12.2020	27.11.2020	3481	25.03	5.16	19.89104	0.00	13.26069			
5	RM/NA/HIL/20/0001	Islampur Nischalganj to Road to Bakaur via Rampur	1281033299	5275/04.10.19	2.574	90.073	75.67772	23.59300	02/MBD/20-21	02.12.2020	24.11.2020	3469	25.04	5.13	45.40663	0.00	30.27109			
6	RM/NA/HIL/20/0001	Panchayat Mandach ke lodipur khaddi gawn se radhli Chikka	1281033290	5275/04.10.19	1.980	80.394	71.11154	18.17000	02/MBD/20-21	02.12.2020	26.11.2020	3217	25.03	5.13	42.66692	0.00	28.44462			
7	RM/NA/HIL/19/0006	Hilsa Chiksaura main road to Chamarbigha	1281033303	5275/04.10.19	0.415	32.53	32.51395	3.96021	01/MBD/20-21	02.12.2020	27.11.2020	3390	25.04	5.16	19.50837	0.00	13.00558			
TOTAL																				

- Signed Hard Copy and Soft Copy (in Excel) of recorded IRI is enclosed.
- Up-to-date Physical Progress has been uploaded in MIS.

18/11/2021
18/11/21
Executive Engineer
RWD, Works Division,
Hilsa

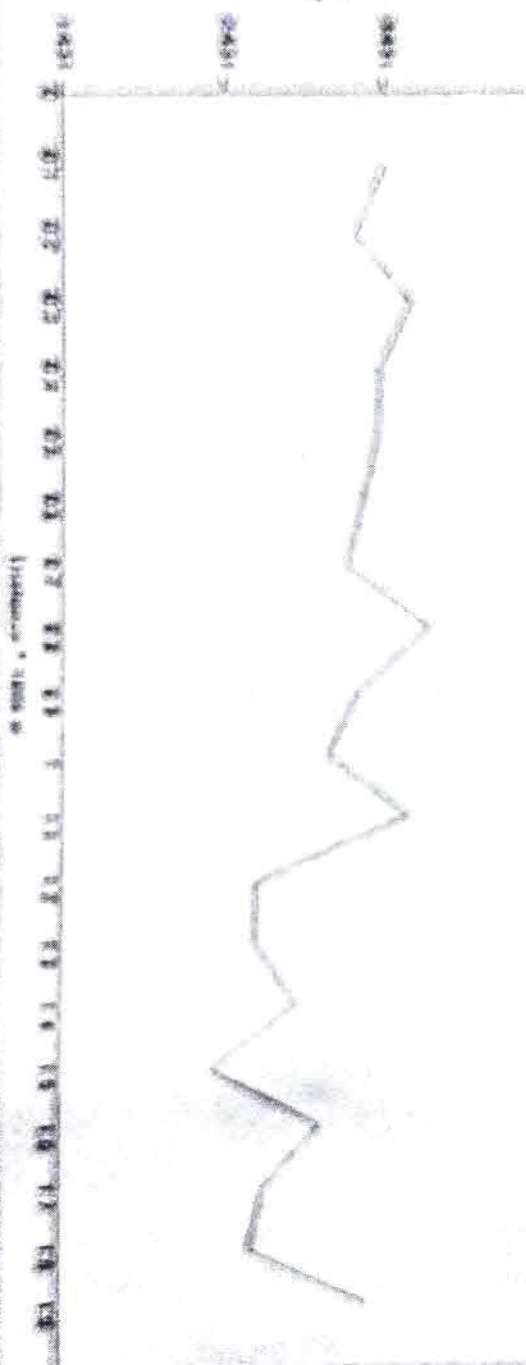

NAME OF THE ROAD : PANCHAYAT MANDACH LODIPUR KHADDI GAWN TO RADHIL CHILKA

PACKAGE NO. : MR-N/19-20/HILSA/05

DIVISION : HILSA

BLOCK : EKANGARSARAI

CONTRACTOR : SUNNY ENGINEERING WORKS

LENGTH OF THE ROAD : 1.980 KM

Date	Time	Section No.	Length In km	Bumps In mm	Speed Rate	OR mm/km	UIV mm/km	CATEGORY ROAD	IRI	Latitude	Longitude	Event				
21/12/20	12:30:19	28	0.1	340	0	3400	3460	G	4.57	25.275195	85.210235	Normal				
21/12/20	12:30:30	28	0.1	320	20.2	3200	3273	G	4.35	25.275198	85.209225	Normal				
21/12/20	12:31:10	28	0.1	360	30.3	3600	3648	G	4.79	25.275298	85.208232	Normal				
21/12/20	12:31:20	28	0.1	340	30.3	3400	3460	G	4.57	25.275322	85.207238	Normal				
21/12/20	12:31:29	28	0.1	340	30.3	3400	3460	G	4.57	25.275342	85.20616	Normal				
21/12/20	12:31:39	28	0.1	330	30.3	3300	3367	G	4.46	25.275348	85.20513	Normal				
21/12/20	12:31:49	28	0.1	320	30.3	3200	3273	G	4.35	25.275507	85.204192	Normal				
21/12/20	12:32:3	28	0.1	380	20.2	3800	3835	G	5.01	25.275645	85.203182	Normal				
21/12/20	12:32:13	28	0.1	330	30.3	3300	3367	G	4.46	25.275698	85.202238	Normal				
21/12/20	12:32:23	28	0.1	310	30.3	3100	3180	G	4.24	25.275745	85.201245	Normal				
21/12/20	12:32:39	28	0.1	370	30.3	3700	3741	G	4.9	25.275822	85.200185	Normal				
21/12/20	12:32:49	28	0.1	260	30.3	2600	2712	G	3.68	25.275878	85.199225	Normal				
21/12/20	12:33:0	28	0.1	260	30.3	2600	2712	G	3.68	25.275588	85.198282	Normal				
21/12/20	12:33:14	28	0.1	290	30.3	2900	2992	G	4.01	25.2757	85.197205	Normal				
21/12/20	12:33:24	28	0.1	230	30.3	2300	2431	G	3.34	25.275802	85.196212	Normal				
21/12/20	12:33:34	28	0.1	310	30.3	3100	3180	G	4.24	25.275877	85.195235	Normal				
21/12/20	12:33:49	28	0.1	270	30.3	2700	2805	G	3.79	25.275695	85.194292	Normal				
21/12/20	12:34:0	28	0.1	260	30.3	2600	2712	G	3.68	25.27556	85.193248	Normal				
21/12/20	12:34:24	28	0.092	320	10.1	3478	3533	G	4.66	25.275725	85.192222	Normal				
TOTAL			1.892	594	505	59678	61141		81.35	480.23575	1618.823183					
AVERAGE						3140.947	3217.94737		4.281579							


 22.12.20
 28/12/20

Date: 5/12/20

OFFICE OF THE EXECUTIVE ENGINEER

REGIONAL LABORATORY, R. W. D., GULZARBAGH, PATNA - 7
PHYSICAL AND GRADATION TEST OF COARSE AGGREGATE

Name of Project/Road :- Panchayat Mandara Ke Lodipur Khaddi gaur se Rashi' chika tak.
 Name of Scheme :- 3054/MR
 Name of Agency :- Sunny Engineering works
 Nature of sample : Bitumen content (S.D.B.C.)
 Location :- 12am.

Ref :- Material sent by E.E./A.E. R.W.D. WORKS Division/Sub Division Ekamgarh
 Agreement No / Package No. : 02/MAD/2020-21
 Date of Collection/Received :- 02/12/2020
 Date of Test :- 04/12/2020
 vide letter No. 186 Dt. 12.11.2020

SL. NO.	SAMPLE NO.	1	2	3	REMARKS
1	Wt. of mix taken before extraction (a)	506.00	508.00	507.00	
2	Wt. of Dry chips after extraction (b)	479.30	482.20	481.45	
3	Percentage of bitumen (in the mix) [(a-b)*100/a]	5.28	5.08	5.07	
4	Average % bitumen	5.13			

18/12/20
 L.A.

18/12/20

Regional Laboratory
 R.W.D. Guljarbagh patna - 7

Regional Laboratory
 R.W.D. Guljarbagh patna - 7

Regional Laboratory
 R.W.D. Guljarbagh patna - 7

Regional Laboratory
 R.W.D. Guljarbagh patna - 7

04/12/2020
 A.E.

04/12/2020
 E.E.