

कार्यपालक अभियंता का कार्यालय,
ग्रामीण कार्य विभाग, कार्य प्रमण्डल, हिलसा।

पत्रांक...../2/.....

/ हिलसा, दिनांक: 13-01-21

प्रेषक

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल, हिलसा।

सेवा में,


नोडल पदाधिकारी,
नई अनुरक्षण निति-2018 (3054),
ग्रामीण कार्य विभाग, बिहार, पटना।

विषय- नई अनुरक्षण निति 2018 शीर्ष 3054 के अंतर्गत वित्तीय वर्ष 2020-21 में व्यय हेतु आवंटन की मांग।

महोदय,

उपर्युक्त विषय के संबंध में नई अनुरक्षण निति 2018 शीर्ष 3054 के अंतर्गत वित्तीय वर्ष 2020-21 में व्यय हेतु संलग्न विवरणी के अनुसार रु० 135.36622 (रु० एक करोड़ पैंतीस लाख छत्तीस हजार छः सौ बाईस मात्र) रुपये का आवंटन उपलब्ध कराने की कृपा की जाए ताकि किये गये कार्यों का भुगतान किया जा सके।
अनुलग्नक :- विहित प्रपत्र में अधियाचना।

विश्वासभाजन


13-01-2021

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल, हिलसा।



13/01/21

Requisition Formate for Scheme Head - MR(3054) under Bihar Rural Road Maintenance Policy - 2018 (Initial Rectification and Surface Renewal)

Name of Works Division :-Hilsa

SI No.	Package No.	Name of Road	Project ID as per MIS	Administrative Approval (AA)	Agreement Amount (in Lakh)	Agreement No. & Date	Date of Completion as per Agreement	Actual Date of Completion	Value of IRI (in mm/km)	Thickness of Bitumen Layer (in mm)	Value of Bitumen Content in Percentage	Previous Total Allocated Amount (in Lakh)	up-to-date expenditure as per MIS (in Lakh)	Requisition against work done (in Lakh)	Remarks			
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
1	RM/NA/HIL/20/0001	Ekgarsarai parwalpur mukhya path se atramchak chora to rasisia tak path marammati	1281033307	5275/04.10.19	1.387	41.40	31.82427	12.90600	02/MBD/20-21	02.12.2020	25.11.2020	3387	25.02	5.18	19.09456	0.00	12.72971	
2	RM/NA/HIL/20/0001	Mushar rasisa road to chakdah	1281033309	5275/04.10.19	1.303	52.496	45.91463	12.00200	02/MBD/20-21	02.12.2020	23.11.2020	3456	25.02	5.17	27.54878	0.00	18.36585	
3	RM/NA/HIL/20/0001	Panchayat Jamuwan ke nischalganj Islampur road to rasisa gaon	1281033308	5275/04.10.19	1.332	54.546	48.22170	12.40900	02/MBD/20-21	02.12.2020	26.11.2020	3288	25.05	5.11	28.93302	0.00	19.28868	
4	RM/NA/HIL/20/0001	Diawan-Berthu Rd. to Pakari	10200802023	5275/04.10.19	1.219	41.162	33.15173	10.56200	02/MBD/20-21	02.12.2020	27.11.2020	3481	25.03	5.16	19.89104	0.00	13.26069	
5	RM/NA/HIL/20/0001	Islampur Nischalganj to Road to Bakaur via Rampur	1281033299	5275/04.10.19	2.574	90.073	75.67772	23.59300	02/MBD/20-21	02.12.2020	24.11.2020	3469	25.04	5.13	45.40663	0.00	30.27109	
6	RM/NA/HIL/20/0001	Panchayat Mandach ke lodipur khaddi gawn se radhli chikka	1281033290	5275/04.10.19	1.980	80.394	71.11154	18.17000	02/MBD/20-21	02.12.2020	26.11.2020	3217	25.03	5.13	42.66692	0.00	28.44462	
7	RM/NA/HIL/19/0006	Hilsa Chikhsaura main road to chamarbigha	1281033303	5275/04.10.19	0.415	32.53	32.51395	3.96021	01/MBD/20-21	02.12.2020	27.11.2020	3390	25.04	5.16	19.50837	0.00	13.00558	
TOTAL																		

- Signed Hard Copy and Soft Copy (in Excel) of recorded IRI is enclosed.
- Up-to-date Physical Progress has been uploaded in MIS.

18/11/2021
18/11/21


Executive Engineer
RWD, Works Division,
Hilsa

Name of Customer: SUNNY ENGG WORKS
 Name of Work: PANCHAYAT JAMUNWAN NIC
 Road: _____
 Lab Job number: _____
 Date: 21-12-2020
 Section No. 32

Test Date: 21-12-2020 Road Name: MPUR RD TO SARISA GAWN
 Machine No: _____ Road Type: (R) RURAL ROAD
 Start S. No: _____ Side: _____ Interval: _____
 Start E. No: _____
 Weather: _____
 Start Location: _____
 End Location: _____
 UV Range: 1618 To 5000 1000 mm/km
 Dist Range: 0 To 1.3 0.1 ~1000 m
 Equation: $Y = 0.5X^2 + 0.936X + 278.4$

Print Generate Report and Graph Redraw Graph Map View

File: C:\Users\SHAZ\Desktop\13 DEC 2020\1 DEC 2020\RAW DATA\32.Xls. Section No.: 32. Egn: $Y = 0.5X^2 +$
 Name of Customer: SUNNY ENGG WORKS. Name of Work: Road: PANCHAYAT JAMUNWAN NICHALGANJ

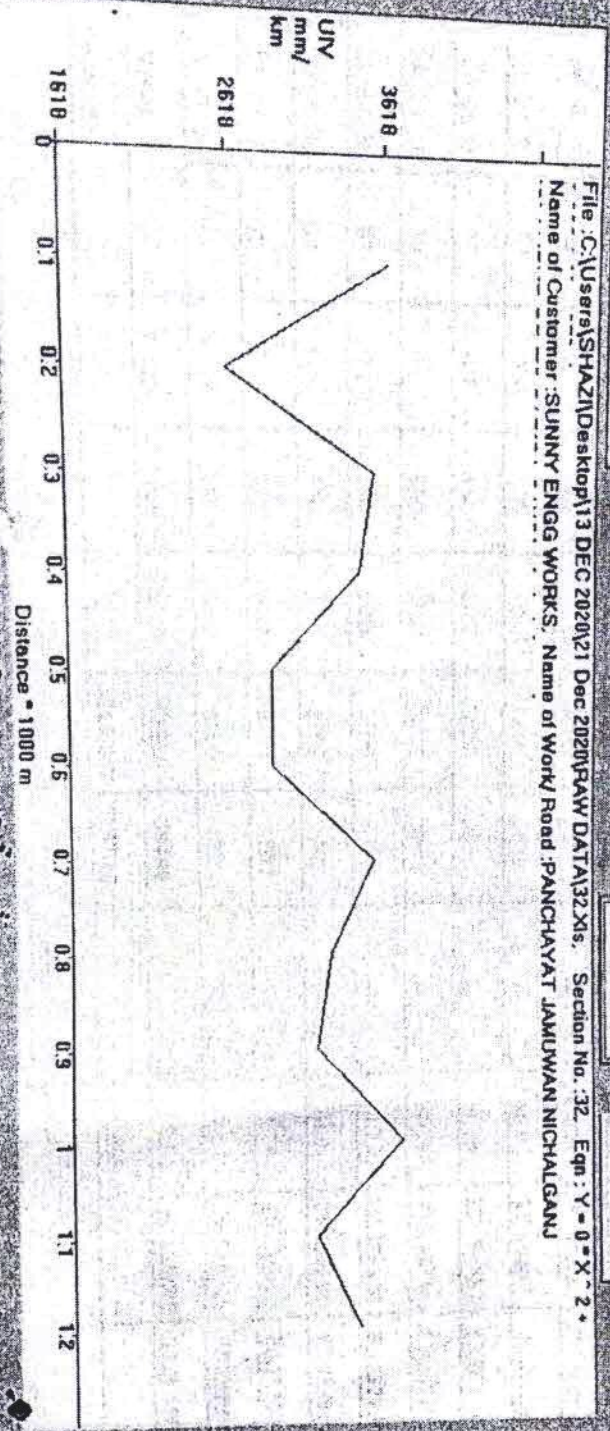

NAME OF THE ROAD : PANCHAYAT JAMUWAN NICHALGANU ISLAMPUR ROAD TO SARISA GAWN

LENGTH OF THE ROAD : 1.332 KM

PACKAGE NO. : MR-N/19-20/HILSA/05

DIVISION : HILSA

BLOCK : EKANGARSARAI

CONTRACTOR : SUNNY ENGINEERING WORKS

Date	Time	Section No.	Length in km	Bumps in mm	Speed Rate	OR mm/km	UIV mm/km	CATEGORY ROAD	IRI	Latitude	Longitude	Event	Y = 0 * X^2 + 0.936 * X + 278.4 X = 3400 Y = 3460		
21/12/20	14:32:22	32	0.1	360	0	3600	3648	G	4.79	25.179708	85.282727	Normal			
21/12/20	14:33:0	32	0.1	250	20.2	2500	2618	G	3.56	25.180335	85.282137	Curve			
21/12/20	14:33:15	32	0.1	350	20.2	3500	3554	G	4.68	25.181158	85.282305	Curve			
21/12/20	14:33:32	32	0.1	340	30.3	3400	3460	G	4.57	25.182038	85.282658	Normal			
21/12/20	14:33:42	32	0.1	280	30.3	2800	2899	G	3.9	25.182912	85.282878	Normal	(R) RURAL ROAD		
21/12/20	14:33:52	32	0.1	280	30.3	2800	2899	G	3.9	25.18387	85.28308	Normal	Good	Average	Poor
21/12/20	14:34:8	32	0.1	350	20.2	3500	3554	G	4.68	25.184636	85.282793	Curve	<4000	4001-5000	>5001
21/12/20	14:34:18	32	0.1	320	30.3	3200	3273	G	4.35	25.185518	85.282777	Normal			
21/12/20	14:34:28	32	0.1	310	30.3	3100	3180	G	4.24	25.186448	85.282793	Normal			
21/12/20	14:34:43	32	0.1	370	10.1	3700	3741	G	4.9	25.187385	85.282912	Speed Breaker			
21/12/20	14:35:0	32	0.1	310	30.3	3100	3180	G	4.24	25.188253	85.283097	Normal			
21/12/20	14:35:18	32	0.035	260	20.2	3400	3460	G	4.57	25.188627	85.282945	Normal			
TOTAL			1.135	3780	272.7	38600	39466		52.38	302.21089	1023.3931				
AVERAGE						3216.667	3288.833		4.365						

32.12.20
Sunny

B31

Date: 5/12/20

OFFICE OF THE EXECUTIVE ENGINEER

REGIONAL LABORATORY, R. W. D, GULZARBAGH, PATNA - 7
PHYSICAL AND GRADATION TEST OF COARSE AGGREGATE

Name of Project/Road :- Panchayat Samuam K. Nichalganj Islampur Road to Sarisa, Gum.
Name of Scheme :- 3054/MR
Name of Agency :- Sunny Engineering Works.
Nature of sample :- Bitumen, cement (3:0:0.8.C)
Location :- 420m
Ref :- Material sent by E/E./A.E. R.W.D. WORKS Division/Sub Division Eksangasaree
Agreement No / Package No. : 02/MBD/2020-21
Date of Collection/Received :- 02/12/2020
Date of Test :- 04/12/2020
vide letter No. 186 Dt. 12-11-2020

SL. NO.	SAMPLE NO.	1	2	3	REMARKS
1	Wt. of mix taken before extraction (a)	500.00	519.00	519.00	
2	Wt. of Dry chips after extraction (b)	474.35	492.40	492.65	
3	Percentage of bitumen (in the mix) [(a-b)*100/a] (%)	5.13	5.13	5.08	
4	Average % bitumen	5.11			

04.12.2020

Signature

04/12/2020

04/12/2020

Regional Laboratory
R.W.D. Guljarbagh patna - 7

Regional Laboratory
R.W.D. Guljarbagh patna - 7

Regional Laboratory
R.W.D. Guljarbagh patna - 7

Regional Laboratory
R.W.D. Guljarbagh patna - 7