



बिहार काय विभाग

बिहार ग्रामीण विकास एवं परिवहन विभाग

BIHAR RURAL ROADS PROJECT


Bihar Rural Road Development Agency (BRRDA)

Govt. of Bihar

FDR

YEAR - 2020-2021

FLOOD DAMEGED REPORT

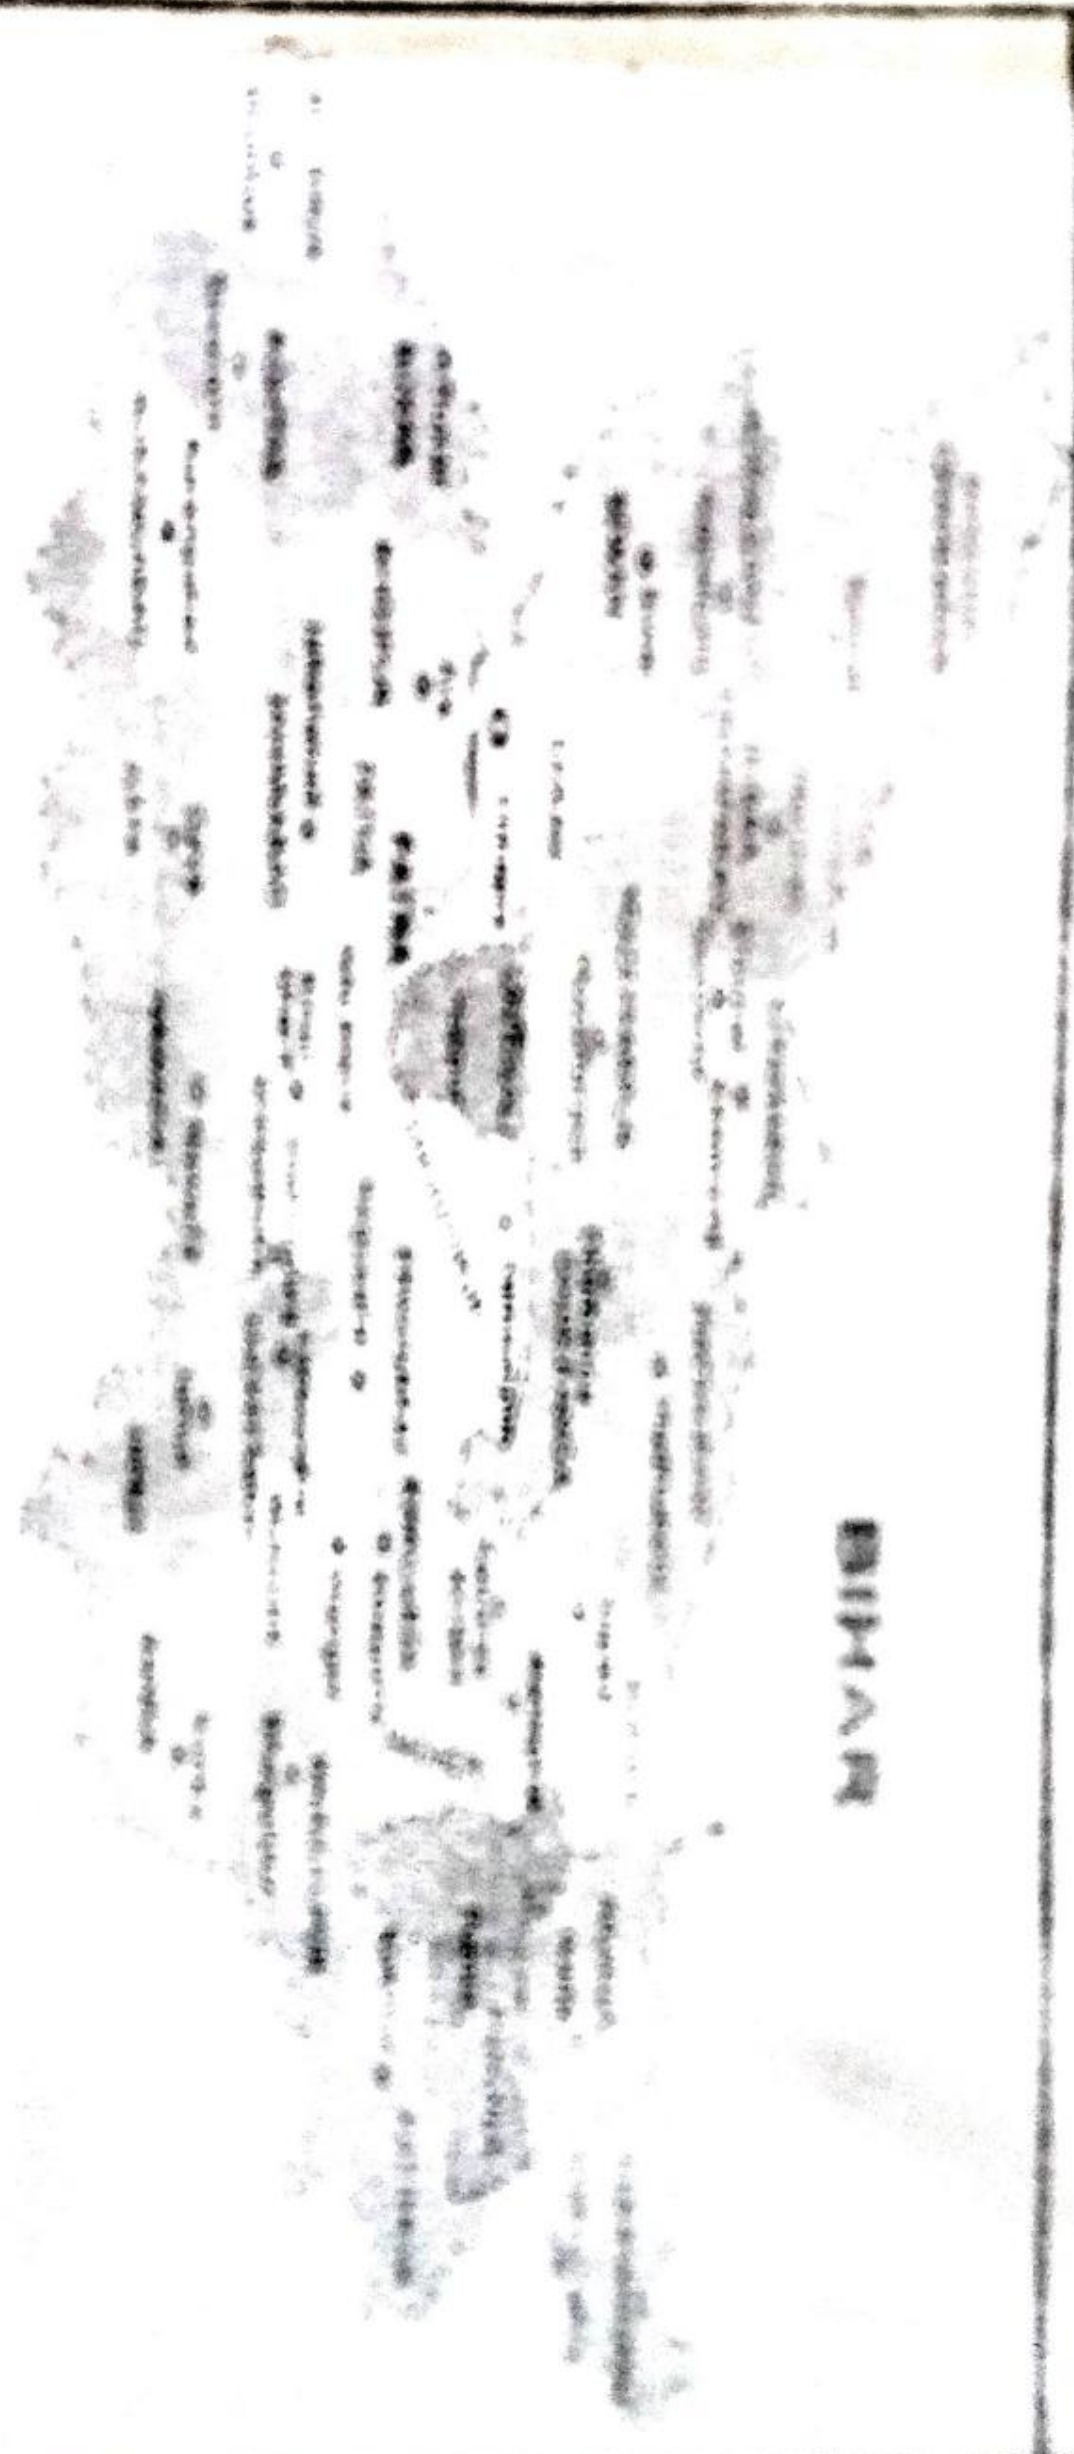

Name of the Road :

RESTORATION OF ROAD BHAGWANPUR MORA HT ROAD SAHSAON TQ3 TO GOPALPUR VAJ
ARUA PIPRAHIA

DISTRICT	:	SIWAN	
DIVISION	:	Maharajganj	
BLOCK	:	BHAGWANPUR HAT	
TOTAL LENGTH OF ROAD	:	0.000	KM
TOTAL COST OF CONSTRUCTION	:	4007 5.014	Lac
TOTAL COST OF PROJECT	:	4007 5.014	Lac

SUBMITTED BY:-

EXECUTIVE ENGINEER
RWD (W) DIVISION Maharajganj
SIWAN

YEAR-2020-2021

GENERAL ABSTRACT OF COST

Location: BHAGWANPUR HAJ

District:- SIWAN

Length of Road:--

0.000 KM

Name of Road:--

RESTORATION OF ROAD BHAGWANPUR MORA BT ROAD SAHSAON T03 TO
GOPALPUR VAI ARUA PIPRAHIA

No.	Item of Work	Amount
A	CONSTRUCTION COST	5.098 : 3.546 4.437 Lacs
	Add GST @ 12%	: 0.426 0.532 Lacs
	Add Labour Cess @ 1%	: 0.035 0.044 Lacs
	TOTAL CONSTRUCTION COST INCLUDING GST AND L.C	5.098 : 4.007 5.014 Lacs
	TOTAL	: 4.007 5.014 Lacs

5.098

[Signature]
20.11.2020
Junior Engineer

[Signature]
20/11/20
Asstt. Engineer

[Signature]
28/11
Executive Engineer

Technically Approved For Rs 5.098 lacs (Rupees Five lacs Nine Thousand & Eight Hundred only)

[Signature]
14/01/21
Superintending Engineer
RWD Work, Circle-Siwan

[Signature]
14/01/21
u.

Inspection Report For Flood Damage Work

Date

1 Name of P.W. Maharaajgarh

2 Name of District/Road Bhagpurpurhat/Bhagpurpurhat area lot road Shakti road To Gopur
via Anna Piprahia

A For Road

1 Damage Location/Chainage: 2000 m to 2900 m

2 Damage Length: 64 m

3 Nature of Damage Fully damage from heavy rainfall and flood

4 Details of Restoration Work:

i Material being used in Restoration Work: Brick bats and Earthwork

ii Equipments /Tools being used in restoration work: JCB, Tractor trolley, roller, shovel

iii Procedure taken up in Restoration Work:

iv Restored Length: 64 m

B For Bridge

1 Damage Location/Chainage:

2 Damage Length

3 Nature of Damage:

4 Details of Restoration Work:

i Material being used in Restoration Work:

ii Equipments /Tools being used in restoration Work:

iii Procedure taken up in Restoration Work:

iv Restored Length:

N/A

SE 20.11.2020

AE 20.11.20

EE 20.11.20

Signature 20/11/20

(Name of Inspector)

Sl. No.	Item No.	Particulars	Unit	NOS	LENGTH	WIDTH	HEIGHT	QUANTITY	RATE	AMOUNT (In Rs.)
		SUB HEAD: PREPARATORY WORKS, SITE CLEARANCE, DISMANTLING								
		(Construction of Embankment with material obtained from borrow pits with a lift upto 1.5 m, transporting to the site spreading, grading to required slope and compacting to meet requirement of Tables 300.1 and 300.2 with a lead upto 1000 m & 100 m as per Technical Specification Clause 301.5. (Including Royalty & Labour Cess).								
		AT shoulder	cum	2	75	1.3	0.3	58.50		
		Total quantity of earth work						58.50		
		For 1000 m lead @ 100 %						58.50	190.57	11,148.00
2	401	BRICK BATS								
		Providing and filling brick bats in ditches including cost of brick bats and labour all complete job as per specification and direction of E/L	cum		(31+29)/2	(5.5+6.5)/2	(0.3+6+1)/3	102.66		
			cum	1	30	5.4	0.63	113.40		
			cum		8+11/2	(5.5+6.5)/2	(0.4+0.5+0.6)/3	25.18		
			cum	2	9.5	5.3	0.5	57.00		
			cum		(16+14)/2	(5.5+6.5)/2	(0.9+1.0+1.1)/3	79.50		
			cum	1	15	5.3	1	90.00	2412.06	498657.00
		Total quantity	Cum					260.40	1,661.25	3,443,439
								206.74		4,32,590.00
										443738.00

354587.00
509805.00

JE
RWD
20.11.2020

AE
RWD
20.11.2020

EE
RWD
20.11.2020