



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar




BIHAR RURAL ROADS PROJECT Bihar Rural Road Development Agency (BRRDA) Govt. of Bihar

FDR

YEAR -2020-2021

FLOOD DAMEGED REPORT

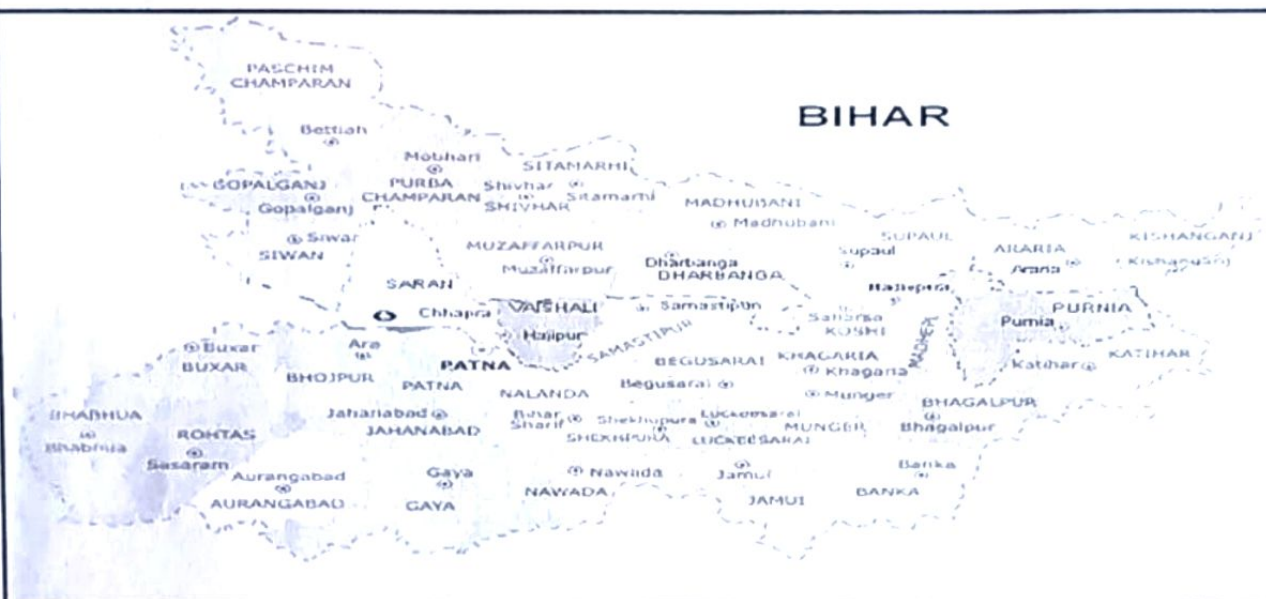

Name of the Road :-

RESTORATION OF ROAD DUMRA to TO Sikatiya

DISTRICT	:	SIWAN	
DIVISION	:	Maharajganj	
BLOCK	:	LAKRINABIGANJ	
TOTAL LENGTH OF ROAD	:	0.000	KM
TOTAL COST OF CONSTRUCTION	:	1.534 1.209	Lac
TOTAL COST OF PROJECT	:	1.534 1.209	Lac

SUBMITTED BY:-

EXECUTIVE ENGINEER
RWD (W) DIVISION Maharajganj
SIWAN

YEAR -2020-2021

GENERAL ABSTRACT OF COST

Block:- LAKRINABIGANI

District:- SIWAN

Length of Road:- 0.000 KM

Name of Road:- RESTORATION OF ROAD DUMRA to TO Sikatiya

SL. No.	Item of Work	Amount
A	CONSTRUCTION COST :	1.070 Lacs
	Add GST @ 12% :	0.120 Lacs
	Add Labour Cess @ 1% :	0.011 Lacs
	TOTAL CONSTRUCTION COST INCLUDING GST AND L.C : 1.539	1.209 Lacs
	TOTAL : 1.539	1.209 Lacs

[Signature]
24/11/20
Junior Engineer

[Signature]
24/11/20
Asstt. Engineer

[Signature]
28/11
Executive Engineer

Technically Approved for Rs 1.534 lac (Rupees One lac Fifty Three Thousand & Four Hundred Only)

[Signature]
14/10/21
Superintending Engineer
RWD Circle-Siwan

[Signature]
12/11/2021
4

SUMMARY OF COST ESTIMATE FOR THE PROJECT

PACKAGE NO.

NAME OF ROAD :

RESTORATION OF ROAD DUMRA to TO Sikatiya

DISTRICT

SIWAN

BLOCK

LAKRINABIGANJ

DIVISION

Maharajganj

LENGTH OF ROAD (in Km)

0.000

LENGTH OF BT PAVEMENT

0

LENGTH OF CC PAVEMENT

0

CD STRUCTURES

HUME PIPE

0

RCC CULVERT

0

BOX CELL CULVERT

0

CAUSEWAY / MINOR BRIDGE

0

Sl. No.	DESCRIPTION	AMOUNT (LAKHS)
2	EARTHWORK	4162.000
3	BRICK BATS	102790.000
4	HP Pipe NP3	
5	EC bag	0.000
TOTAL		106952.000
ADD GST @ 12 %		12834.240
ADD LABOUR CESS @ 1 %		1069.520
TOTAL COST OF PROJECT IN LACS =		120855.760


JE
RWD


AE
RWD


EE
RWD

Inspection Report For Flood Damage Work

Date

1 Name of PIUs: - Maharajganj

2 Name of Block/Road: - Lakshmanpur / Dumra to Sakatiya

A For Road

1 Damage Location/Chainage: 4000 - 4300 mtrs.

2 Damage Length: - 28 mtrs.

3 Nature of Damage: Heavy Rainfall & Flood.

4 Details of Restoration Work:

i Material being used in Restoration Work: → Brick Bats & E/W

ii Equipments /Tools being used in restoration Work: - JCB, Tractor, Tallooy, Roller, & Shovel

iii Procedure taken up in Restoration Work:

iv Restored Length: - 28 mtrs.

B For Bridge

1 Damage Location/Chainage:

2 Damage Length

3 Nature of Damage:

4 Details of Restoration Work:

i Material being used in Restoration Work:

ii Equipments /Tools being used in restoration Work:

iii Procedure taken up in Restoration Work:


iv Restored Length:

N/A


JE
27/11/2020


AE
27.11.2020


EE
28/11/20


Signature
27/11/20

(Name of Inspector)

Sl. No.	SDB SL. NO.	MORD Ref. No.	Description	Unit	NOS	LENGTH	WIDTH	HEIGHT	QUANTITY	RATE	AMOUNT (in Rs.)
1	3.4	301.5	SUB HEAD : PREPARATORY WORKS SITE CLEARANCE, DISMANTLING Construction of Embankment with material obtained from borrow pits with a lift upto 1.5 m, transporting to the site spreading, grading to required slope and compacting to meet requirement of Tables 300.1 and 300.2 with a lead upto 1000 m & 100 m as per Technical Specification Clause 301.5. (Including Royalty & Labour Cess). AT shoulder								
			Total quantity of earth work	cum	2	28	1.3	0.3	21.84		
			For 1000 m lead @ 100 %						21.840		
									21.84	190.57	4,162.00
2		401	BRICK BATS Providing and filling brick bats in ditches including cost of brick bats and labour all complete job as per specification and direction of E/L.								
				cum	1	3.5	3.75	0.6			
				cum	1	10	3.75	0.6	7.88		
				cum	1	14	3.75	0.6	22.50		
			Total quantity	Cum					31.50	2412.56	1,49,246.00
									61.88	1,661.25	1,02,797.00
											106952.00

153908=0

JE
24.10.20
RWD

JE
24.10.20
RWD

JE
24.10.20
RWD