



NABARD

YEAR -2020-2021

GENERAL ABSTRACT OF COST

Block:- BHAGWANPUR HATT

District:- SIWAN

Length of Road:- 0.000 KM

Name of Road:- RESTORATION OF ROAD L047 TO LAHURI KAWAIIYA

SL. No.	Item of Work	Amount
A	CONSTRUCTION COST	0.920 : 6.642 -0.841 Lacs
	Add GST @ 12%	: 0.077 -0.101 Lacs
	Add Labour Cess @ 1%	0.920 : 0.006 -0.008 Lacs
	TOTAL CONSTRUCTION COST INCLUDING GST AND L.C	: 0.725 0.951 Lacs
	TOTAL	0.920 : 0.725 -0.951 Lacs

[Signature]
20.11.2020
Junior Engineer

[Signature]
20.11.2020
Asst. Engineer

[Signature]
20.11.2020
Executive Engineer

Technically Approved for Rs 0.920 lacs (Rupees Ninety Two Thousand) order

Superintending Engineer
RWD, SIWAN
RWD, SIWAN
12/11/2021

u

Inspection Report For Flood Damage Work

Date

1 Name of PIUs : Maharajgarh

2 Name of Block/Road : Bhagwanpur hat / L047 to Lahuri kwaiya

A For Road

1 Damage Location/Chainage: 400 m to 600 m

2 Damage Length: 16 m

3 Nature of Damage: Fully damaged from heavy rainfall and flood.

4 Details of Restoration Work:

i Material being used in Restoration Work: Brick bats and earthwork

ii Equipments /Tools being used in restoration Work: JCB, Tractor trolly, roller.

iii Procedure taken up in Restoration Work:

iv Restored Length: 16 m

B For Bridge

1 Damage Location/Chainage:

2 Damage Length

3 Nature of Damage:

4 Details of Restoration Work:


i Material being used in Restoration Work:

ii Equipments /Tools being used in restoration Work:

iii Procedure taken up in Restoration Work:

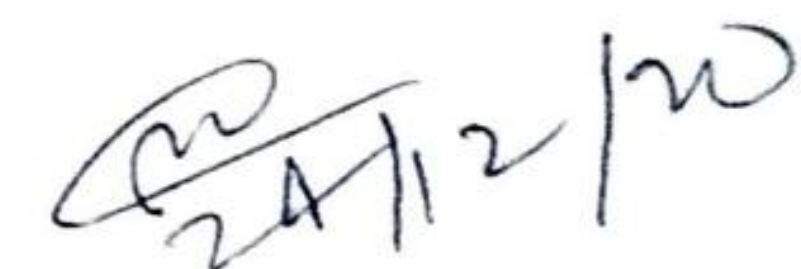
iv Restored Length:

N/A


JE 20.11.2020


AE
20.11.20


EE
28/11


Signature

(Name of Inspector)

Sl. No.	SDB SL.NO	MORD Ref.No	Description	Unit	NOS	LENGTH	WIDTH	HEIGHT	QUANTITY	RATE	AMOUNT (in Rs.)
SUB HEAD : PREPARATORY WORKS ,SITE CLEARANCE , DISMANTLING											
1	3.4	301.5	Construction of Embankment with material obtained from borrow pits with a lift upto 1.5 m , transporting to the site spreading , grading to required slope and compacting to meet requirement of Tables 300.1 and 300.2 with a lead upto 1000 m & 100 m as per Technical Specification Clause 301.5 . (Including Royalty & Labour Cess)								
			AT shoulder								
				cum	2	18	1.3	0.3	14.04		
			Total quantity of earth work						14.040		
			For 1000 m lead @ 100 %						14.04	190.57	2,676.00
2		401	BRICK BATS								
			Providing and filling brick bats in ditches including cost of brick bats and labour all complete job as per specification and direction of E/L.								
				Cum	1	10+12/2	4.5 4.5	0.5+0.7/2			
				Cum	1	11	4.5	0.6	29.70		
				cum	1	2.5+3/2	3.8 4.80	0.4+0.5/2	29.00		
				1		2.75	4.30	0.45	5.32		
				1		2	2.5	0.4	2.00		
				cum	0	0	0	0	0.00	2412.26	89,294.00
			Total quantity	Cum					49.03	1,001.25	61,502.00
									37.02		
											84119.00

64178/-
91,940.00

[Signature]
JE 20.11.2020
RWD

[Signature]
20/11/20
AE
RWD

[Signature]
28/11
EE
RWD