

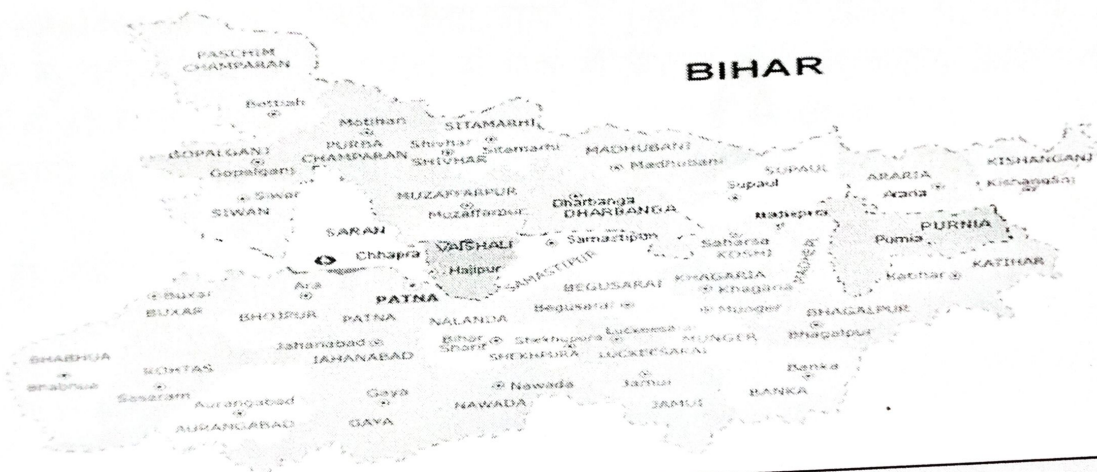


ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

FDR

PLAN HEAD FDR(2245) (2020-2021)



MOTORABLE OF ROAD FROM MALAKHACHAK TO TRILOKICHAK

DISTRICT	:-	Saran	
DIVISION	:-	Sonpur	
BLOCK	:-	Dighwara	
TOTAL LENGTH OF ROAD	:-	1.800	KM
TOTAL COST OF CONSTRUCTION	:-	4.765	Lac
TOTAL COST OF PROJECT	:-	4.765	Lac

FDR(2020-2021)

प्रतिवेदन

प्रमंडल का नाम :- ग्रामीण कार्य विभाग कार्य प्रमंडल सोनपुर

पथ का नाम :- मलखाचक से त्रिलोकीचक

पथ की लम्बाई:- 1.800 Km.

प्राक्कलित राशि:- 476463 रु

प्रखंड:- दिघवारा

जिला:- सारण

प्रस्तुत प्राक्कलन सारण जिला अंतर्गत दिघवारा प्रखंड के बस्ती मलखाचक से त्रिलोकीचक तक पथ बाढ़ से क्षतिग्रस्त (F.D.R.) पथांश का यातायात पुनस्थापन (Motorable) कार्य का तैयार किया गया है। इस वर्ष अचानक अत्यधिक बाढ़ आने के कारण पथ के 9th Km. में पथ में कटाव होने के कारण आवागमन बाधित हो गया, तत्काल पथ मरम्मत हेतु पथांश में Brick Bats भरकर कटाव से बचाव का कार्य करते हुए यातायात को पुनस्थापित किया गया है। पथ मरम्मत कार्य का प्राक्कलन वर्तमान अनुसूची दर पर ही तैयार किया गया है प्राक्कलन की स्वीकृति अपेक्षित है।


कनीय अभियंता


सहायक अभियंता


कार्यपालक अभियंता

Inspection Report for flood damage work

Date :

1. Name of PIUs : Akhlesh Kumar.

2. Name of Block/Road : Dighwara

(A) For Road — Malkha chak to Trilokichak

1. Damage Location/Chainage : 1000 — 1800 M.

2. Damage Length : 130 M.

3. Nature of Damage : Road cutting do to flood.

4. Details of Restoration :

(i) Material being used in Restoration : Brick bats.

(ii) Equipment/Tools being used in Restoration works : tractor.

(iii) Procedure taken up in Restoration works : Brick bat filling in

(iv) Restored Length : 130 M.

(B) For Bridge

1. Damage Location/Chainage : x

2. Damage Length : y

3. Nature of Damage : y


4. Details of Restoration : x


(i) Material being used in Restoration : y

(ii) Equipment/Tools being used in Restoration works : y

(iii) Procedure taken up in Restoration works : y

(iv) Restored Length : y


Signature of JE/AF/EE


Signature

(Name of Inspector)

FDR

GENERAL ABSTRACT OF COST

Block:- Dighwara


District:- Saran

Length of Road:-- 1.800 KM

Name of Road:-- Motorable of Road From Malakhachak To Trilokichak

SL. No.	Item of Work	Amount
A	TOTAL COST	: 4.765 Lacs
	TOTAL	: 4.765 Lacs


Junior Engineer


Asstt. Engineer


Executive Engineer

T/A Approved for RS-4.765 lacs

SE
RWD


S.E. Chapra

Name Of Road :-		Motorable of Road From Malakhachak To Triloktchak				Block :-	Dighwara	DISTRICT:-	Saran	LENGTH :- 1.800 KM.		
Sl. No.	SDB SL NO	MORD Ref.No	Description	Unit	NOS	LENGTH	WIDTH	HEIGHT	QUANTITY	RATE	AMOUNT (in Rs.)	
1	8.1.3.2		BRICK BATS Providing brick bats including spreading laying,Labour for dry graded jhama khoa folter under Brick Pitching or boulder pitching in slope or apron including light ramming etc. All complete job as per approved design specification and direction of E/I,including carriage cost of bricks.									
	(iii)											
					Cum	1.00	100.00	3.750	0.50	187.50	✓	
					Cum	4.00	1.50	1.500	0.50	4.50	✓	
					Cum	1.00	15.00	3.000	0.40	18.00	✓	
					Cum	4.00	1.50	1.500	0.50	4.50	✓	
				Cum	2.00	3.00	3.750	0.30	6.75	✓		
							Total Quantity=		221.25	2,153.51	4,76,463.00	
									TOTAL COST IN RS. =		4,76,463.00	


 JE
 RWD


 AE
 RWD


 JE
 RWD