


Abstract of cost for Restoration work of road from Basahiya Seikh to Rosoul via Gadhwala Tola after flood 2020.

Sl. No.	Item of work	Unit	Quantity	Rate	Amount
1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.				
	(a) Bricks bat	cum	202.75	1546.00	313452.00
	(b) Rubbish	cum	50.69	742.00	37612.00
Total					351064.00
Add 1% labour Cess					3511.00
Add 12% GST					42128.00
Grand Total					396703.00
Say Rs					396700.00


8-4-21

J.E.

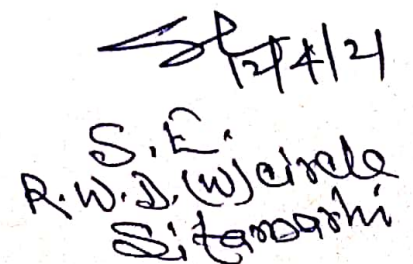

05/04/21

A.E.


E.I.
6-4-21


यह प्राकृतिक अबाधित अभियंता कार्य अचय सीतामही द्वारा गहिल
गोविंदपुर (कार्यपालक अभियंता सीतामही) के निदेशानुसार
254/28-1-21


Technically Approved for Rs 396700.00 (Rupees Three
Lakh Ninety Six Thousand Seven hundred) Only.


S.E.
R.W.D. (W) Circle
Sitapur

Detailed Estimate of Restoration work of road from Basahiya Seikh to Rosoul via Gadhwa Tola after flood 2020

sl no. 1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.						
	from chainage in M	to chainage in M	length in M	width in M	depth in M		Quantity in CUM
1	700	744	44.00	3.3	0.45		65.34
2	900	952	52.00	3	0.6		93.60
3	1105	1165	60.00	3.5	0.45		94.50
							253.44
(a)	Brick Bats 80%						202.75
(b)	Local Sand/ Rubbish 20%						50.69


J.E.


A.E.


E.E.