



Abstract of cost for Restoration work of Sheohar to Daud Chapra after flood 2020.

Sl. No.	Item of work	Unit	Quantity	Rate	Amount
1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.				
	(a) Bricks bat	cum	424.52	1546.00	656308.00
	(b) Rubbish	cum	106.13	742.00	78748.00
2	S/F/F1000 dia NP3 Hume Pipe ..do..do..E/I.	M	10	3348.6	33486.00
Total					768542.00
Add 1% labour Cess					7685.00
Add 12% GST					92225.00
Grand Total					868452.00
Say Rs					868450.00

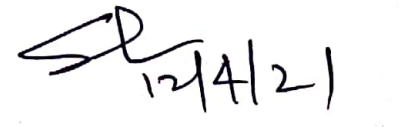

J.E.


A.E.


E.E.


यह प्रावजन अभियान अभियन्ता कार्य अंशेष सूतामदी द्वारा गठित
जीवदस (कार्यपालक अभियन्ता सूतामदी) के बीच प्रतिवेदन
254/29-1-21


Technically Approved for Rs 868450.00 (Rupees
Eight lakh Sixty eight thousand Four hundred
Fifty) only.

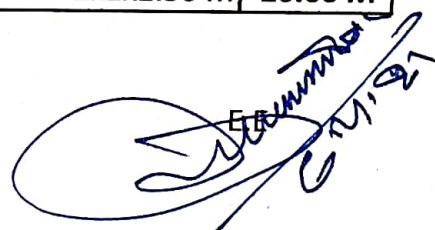

S.E.
R.W.D. (W) Circle
Sitamarhi

Detailed Estimate of Restoration work of road from Sheohar to Daud Chapra after flood 2020

sl no. 1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.						
	from chainage in M	to chainage in M	length in M	width in M	depth in M		Quantity in CUM
3	1400	1424	24.00	(6.5+3.5)/2	4		480.00
4	1650	1653	3.00	3.5	0.6		6.30
5	1700	1704.4	4.40	3.5	0.5		7.70
6	2120	2123.5	3.50	4.1	0.45		6.46
7	2400	2404.5	4.50	3.5	0.75		11.81
8	2430	2437	7.00	3.5	0.75		18.38
							530.65
(a)	Brick Bats 80%						424.52
(b)	Local Sand/ Rubbish 20%						106.13
Sl. No. 2	S/F/F1000 dia NP3 Hume Pipe ..do..do..E/I.						
	2x2x2.50 M						10.00 M


J.E. 8-4-21


A.E. 8.04.21


E. Kumar 8-4-21