

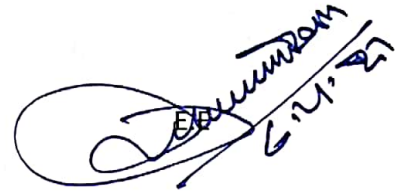


**Abstract of cost for Restoration work of road from Sonoul High School to Narayanpur
Bindi after flood 2020**

Sl. No.	Item of work	Unit	Quantity	Rate	Amount
1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.				
	(a) Bricks bat	cum	349.37	1546.00	540126.00
	(b) Rubbish	cum	87.34	742.00	64806.00
Total					604932.00
Add 1% labour Cess					6049.00
Add 12% GST					72592.00
Grand Total					683573.00
Say Rs					683570.00


J.E.


A.E.


S.E.

यह प्रामाणिक अन्वेषण अभियंता कार्य अंशस सीतामढ़ी द्वारा गहिरा
अन्वेषण (कार्यपासक अभियंता सीतामढ़ी) के अन्वेषण प्रतिवेदन
254/28-1-21


Technically Approved for Rs 683570.00 (Rupees Six
Lakh Eighty Three thousand Five hundred Seventy) only.



S.E.
R.W.D. (W) Circle
Sitamarhi

Detailed Estimate of Restoration work of road from Sonoul High School to Narayanpur Bindi after flood 2020

sl no. 1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.						
	from chainage in M	to chainage in M	length in M	width in M	depth in M		Quantity in CUM
1	3210	3222	12.00	4.00	0.60		28.80
2	3290	3305	15.00	3.90	0.60		35.10
3	3340	3360	20.00	3.50	0.50		35.00
4	3410	3425	15.00	3.80	0.40		22.80
5	3450	3456	6.00	3.00	0.60		10.80
6	3560	3585	25.00	2.00	0.60		30.00
7	3680	3716	36.00	3.00	0.45		48.60
8	3810	3822	12.00	3.50	0.60		25.20
9	3925	3941	16.00	2.40	0.50		19.20
10	4130	4151	21.00	2.10	0.30		13.23
11	4240	4266	26.00	2.00	0.40		20.80
12	4365	4386	21.00	2.20	0.30		13.86
13	4490	4508	18.00	2.10	0.25		9.45
14	4620	4657	37.00	3.00	0.30		33.30
15	4840	4852	12.00	4.00	0.60		28.80
16	5230	5245	15.00	3.70	0.50		27.75
17	5670	5691	21.00	3.60	0.45		34.02
							436.71
(a)	Brick Bats 80%						349.37
(b)	Local Sand/ Rubbish 20%						87.34


J.E.


A.E. Kumar
06.04.21

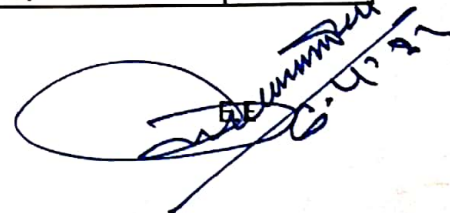
06.04.21