

Abstract of cost for Restoration work of road from Paharpur Talpur NHPC Sadak to Gosalpur Nilami Dharampur chowk hote huye Shahpur Siman after flood 2020

Sl. No.	Item of work	Unit	Quantity	Rate	Amount
1	Supplying & filling of brick bats with manual compaction ...do...do all complete job as per direction of E/l.				
	(a) Bricks bat	cum	688.2	1546.00	1063957.00
	(b) Rubbish	cum	172.05	742.00	127661.00
Total					1191618.00
Add 1% labour Cess					11916.00
Add 12% GST					142994.00
Grand Total					1346528.00
Say Rs					1346520.00


J.E.


A.E.


6.4.21

यह प्रावजन अब/आगू अनियंता कर्म अंशस सीतामढ़ी के कर्म
गहिन अविह्वल (कर्म प्रावक अनियंता सीतामढ़ी) के नयि
प्रतिविह्वल
254/29-1-21

Technically Approved for Rs 1346520.00 (Rupees
Thirteen Lakh forty six thousand five hundred
Twenty) only.


254/21

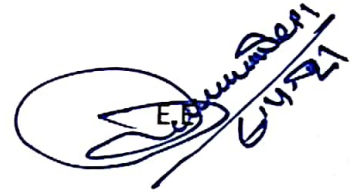
S.E.
R.W.D (W) Circle
Bihar

Detailed Estimate of Restoration work of road from Paharpur Tajpur NHPC Sadak to Gosaipur Nilami Dharampur chowk hote huye Shahpur Siman after flood 2020

sl no. 1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.						
	from chainage in M	to chainage in M	length in M	width in M	depth in M		Quantity in CUM
1	380	620	240.00	3.00	0.40		288.00
2	680	995	315.00	3.30	0.30		311.85
3	1010	1220	210.00	3.10	0.40		260.40
							860.25
(a)	Brick Bats 80%						688.20
(b)	Local Sand/ Rubbish 20%						172.05


J.E.


A.E.


E.A.