


**Abstract of cost for Restoration work of Dhankaul Mohanpur PMGSY Path se
Dakshinwari Tola after flood 2020.**

Sl. No.	Item of work	Unit	Quantity	Rate	Amount
1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.				
	(a) Bricks bat	cum	334.67	1546.00	517400.00
	(b) Rubbish	cum	83.67	742.00	62083.00
Total					579483.00
Add 1% labour Cess					5795.00
Add 12% GST					69538.00
Grand Total					654816.00
Say Rs					654810.00


J.E.


A.E.


S.E.

यह प्रारूपान अधीक्षण अभियंता कार्य अंशख सीतामढ़ी द्वारा
गठित आंचदल (कर्मपाख अभियंता सीतामढ़ी) के अधि
प्रतिवेदन
254/28-1-21

Technically Approved for Rs 654810.00 (Rupees Six
Lakh Fifty four thousand Eight hundred Ten) only.

254/21


S.E.
R.W.D. (W) Circle
Sitamarhi

**Detailed Estimate of Restoration work of Dhankaul Mohanpur PMGSY Path
se Dakshinwari Tola after flood 2020.**

sl no. 1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/l.					
	from chainage in M	to chainage in M	length in M	width in M	depth in M	Quantity in cum
	925	940	15.00	$(4.3+4.8)/2$	1.20	81.90
	940	955	15.00	$(4.1+4.5)/2$	1.40	90.30
	960	965	5.00	4.30	1.00	21.50
	1125	1149	24.00	$(3.00+4.8)/2$	2.40	224.64
						418.34
(a)	Brick Bats 80%					334.67
(b)	Local Sand/ Rubbish 20%					83.67


J.E.


A.E.

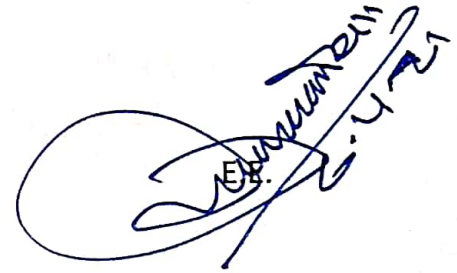
E.E.