
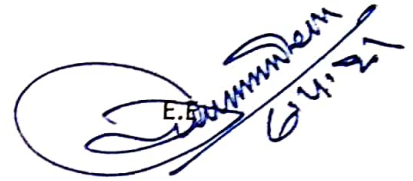


**Abstract of cost for Restoration work of Chhatauna Bazar Pakari Main Road Via
Bishanpur Road after flood 2020.**

Sl. No.	Item of work	Unit	Quantity	Rate	Amount
1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.				
	(a) Bricks bat	cum	129.6	1546.00	200362.00
	(b) Rubbish	cum	32.4	742.00	24041.00
Total					224403.00
Add 1% labour Cess					2244.00
Add 12% GST					26928.00
Grand Total					253575.00
Say Rs					253570.00


J.E.


A.E.


E.E.

यह प्राकल्पन अखीक्षण अनियंता कार्य अंशसुख सीतामही द्वारा
गठित अखीक्षण (कार्यपासक अनियंता सीतामही) के अखीक्षण
254/28-1-21


Technically Approved for Rs 253570.00 (Rupees Two
Lakh Fifty Three thousand Five hundred Seventy)
Only.


254/21

S.E.
R.W.D. (W) Circle
Sitamarhi

Detailed Estimate of Restoration work of road from Chhatauna Bazar Pakari Main Road Via Bishanpur Road after flood 2020

sl no.	1 Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.						
	from chainage in M	to chainage in M		length in M	width in M	depth in M	Quantity in CUM
1	0	35.00		35	2.4	0.3	25.2
2	340	352.00		12	2.5	0.4	12
3	710	733.00		23	2.4	0.5	27.6
4	1230	1235.00	2.00	5	3	0.6	18
5	2440	2450.00		10	3.1	0.6	18.6
6	2920	2925.00		5	2.6	0.6	7.8
7	3110	3130.00		20	3	0.5	30
8	3340	3347.00		7	2	0.6	8.4
9	3415	3419.00		4.00	3	1.2	14.4
							162.00
(a)							Brick Bats 80%
(b)							Rubbish 20%
							129.60
							32.40


J.E.


05.04.21
A.E.


05.04.21
J.E.