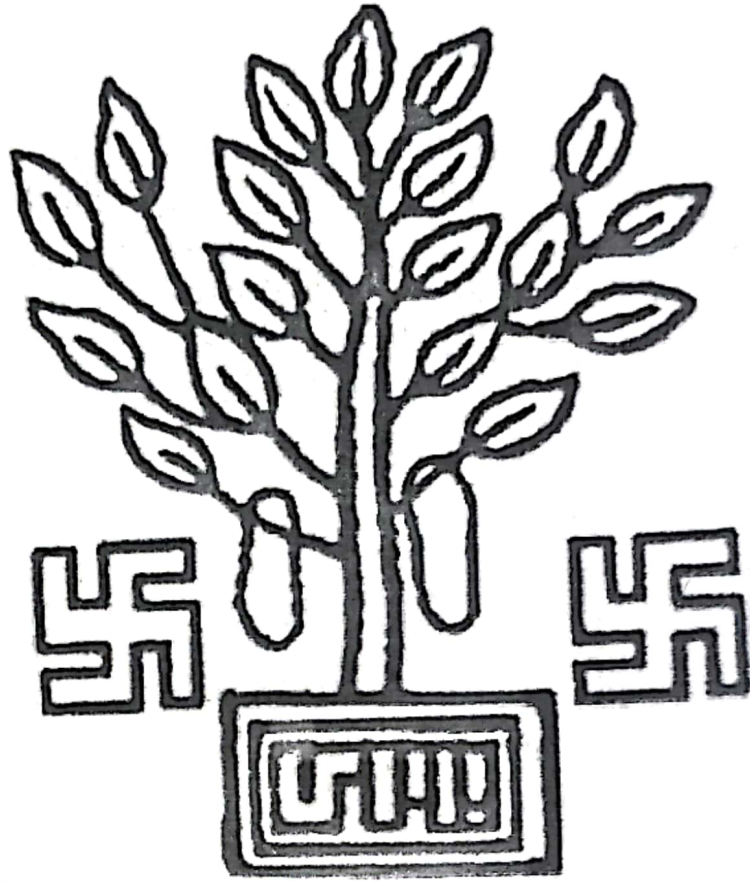


GOVERNMENT OF BIHAR
FDR (2020-21)



बिहार सरकार

Name of Road- Dhaka Phulwariya Road to Parsa	Length-3.275 Km
Estimated Cost- Rs.:-5,13,400.00	Block- Dhaka

Submitted By
Executive Engineer
R.W.D. (W) Division Dhaka

F.D.R (2020-21)

तकनीकी प्रतिवेदन

पथ का नाम :- ढाका-कुलकीड़ा रोड से परसा,

प्रखंड का नाम :- द. 176/

पथ की लम्बाई :- 3.275 कि.मी.

शीर्ष :- 3054,

प्राक्कलित राशि :- रु. 5,13,400.00


अनुरक्षण अवधि :-

प्रस्तुत प्राक्कलन ढाका-कुलकीड़ा रोड से परसा में अतिवृष्टि/वाढ़ से क्षतिग्रस्त पथाशों में यातायात पुर्नस्थापन हेतु तैयार किया गया है जिसकी प्राक्कलित राशि मो0 5,13,400.00 रु0 है। प्रस्तुत प्राक्कलन सचिव ग्रामीण कार्य विभाग बिहार पटना के पत्रांक:-2254, दिनांक:-30.06.2020 के निर्देशानुसार तैयार किया गया है। पथ में अतिवृष्टि/वाढ़ के कारण क्षतिग्रस्त पथाशों में Brick Bats से भरने का प्रावधान किया गया है, तथा आवश्यकता अनुसार पथ में ह्यूम पाईप का प्रावधान किया गया है।


प्राक्कलन में दिये गये दर वर्तमान अनुसूचित दर के अनुरूप है।


7.5.2020

कनीय अभियंता
ग्रामीण कार्य विभाग
कार्य प्रशाखा, ढाका।


07/09/2020

सहाय अभियंता
ग्रामीण कार्य विभाग
कार्य अवर प्रमंडल, ढाका



07/09/2020
कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमण्डल, ढाका


Estimate for Restoration work of Road from Dhaka Phuiwariya Road to Parsa for the year 2020-21 in Dhaka Block.

Length:-3.275Km

SL N.	Name of Item	Unit	Quantity M ³	Rate Rs.	Amount Rs.
1	Labour for laying dry graded jhama khoa or stone filter under Bricks pitching in slope or apron Including light ramming etc..... all complete as per approved design specification and direction of E/I. (Brick Bat) CH:- 1570M to 1600M $15.00 \times 4.50 + 5.50/2 \times 0.300 + 0.450 + 0.300/3 = 26.25M^3$ $15.00 \times 4.50 + 6.00/2 \times 0.600 + 1.80 + 0.800/3 = 84.00M^3$ CH:- 2050M to 2150M $50.00 \times 4.10 \times 0.450 = 92.25M^3$ CH:- 2120M to 2150 $30.00 \times 4.10 \times 0.300 \times 0.450 \times 0.300/3 = 43.05M^3$ Less for H.P. $1 \times 22/7 \div 4 (1.23)^2 \times 5.00 = (-) 5.94M^3$ $= 239.61M^3$	M ³	239.61	2053.84	4,92,121.00
2	Supplying Fitting and and fixing Hume pipe 1000mm dia Hume pipe all complete as per approved design specification and direction of E/I. 1Row x 2 Nos. x 2.50M = 5M	M	5	4258.65	21293.00
			Total=	Rs.	5,13,414.00
				Say Rs.	5,13,400.00


4.9.2020
JE.


07/09/2020
AE.


07/09/2020
EE.

Red Fatch T.A.T/S is accorded for Rs. 5,13,400 =

(.....) crore. Five lacs. This few

Four hundred


29/12/20
SE (R.W.D.)
WORKS
Moulana
29-12-20

Inspection Report for Flood Damage Works:-

Date:-

1. Name of PIUs:- Executive Engineer. R.W.D. (W) Div.ⁿ Dhaka
2. Name of Block:- Dhaka
3. Name of Road :- Dhaka Phulwariya Road to Parsa.

(A) For Road


1. Damage Location Chainage:-

2. Damage Length:- 110 M

3. Name of Damage:- Road damaged due to Flood.

4. Details of Restoration Work:-

- (i) Material being used in Restoration works:- Brick bats
- (ii) Equipments Tools being used in restoration works:-
- (iii) Procedure take up in restoration works:- Departmental.
- (iv) Restored Length:- 110 M


Executive Engineer
R.W.D. (W) Div.ⁿ
Raxaul