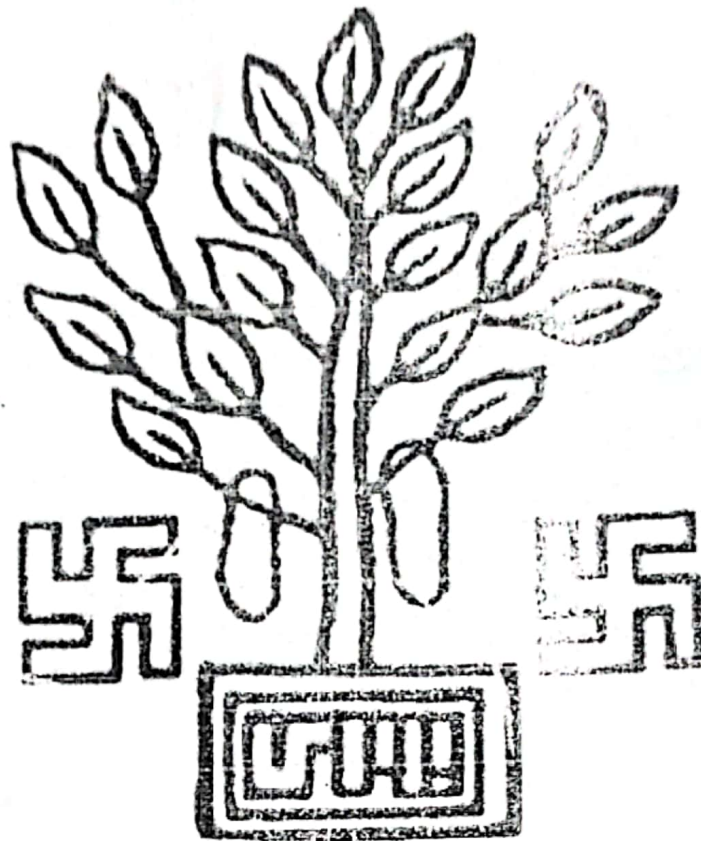


GOVERNMENT OF BIHAR
FDR (2020-21)



बिहार सरकार

Name of Road- Dhaka Ghorasahan Turkaulia	Length-2.333 Km
Estimated Cost- Rs.:- 967600.00	Block- Dhaka

Submitted By
Executive Engineer
R.W.D. (W) Division Dhaka

F.D.R (2020-21)

तकनीकी प्रतिवेदन

पथ का नाम :- दाका - सोडासहा - सुरकोलिया

प्रखंड का नाम :- दाका

पथ की लम्बाई :- 2.3 कि०मी०

शीर्ष :- 3054

प्राक्कलित राशि :- ₹ 9,67,500.00

अनुरक्षण अवधि :- निर्माणाधीन

प्रस्तुत प्राक्कलन दाका - सोडासहा - सुरकोलिया में अतिवृष्टि/बाढ़ से क्षतिग्रस्त पथाशों में यातायात पुर्नस्थापन हेतु तैयार किया गया है जिसकी प्राक्कलित राशि मो० 9,67,500.00 रु० है। प्रस्तुत प्राक्कलन सचिव ग्रामीण कार्य विभाग बिहार पटना के पत्रांक:-2254, दिनांक:-30.06.2020 के निर्देशानुसार तैयार किया गया है। पथ में अतिवृष्टि/बाढ़ के कारण क्षतिग्रस्त पथाशों में Brick Bats से भरने का प्रावधान किया गया है, तथा आवश्यकता अनुसार पथ में ह्यूम पाईप का प्रावधान किया गया है।

प्राक्कलन में दिये गये दर वर्तमान अनुसूचित दर के अनुरूप है।

कनीय अभियंता

ग्रामीण कार्य विभाग

कार्य प्रशाखा, दाका।

सहाय अभियंता

ग्रामीण कार्य विभाग

कार्य अवर प्रमंडल, दाका

कार्यपालक अभियंता

ग्रामीण कार्य विभाग


कार्य प्रमण्डल, दाका


Estimate for Restoration work of Road from Dhaka Ghorasahan Turkaulia for the year 2020-21 in Dhaka Block.


Lenth:- 2.333 Km

SL NO.	Name of Item	Unit	Quantity M ³	Rate Rs.	Amount Rs.
1	Labour for laying dry graded jhamra or stone filter under Bricks pitching in slope or apron including light ramming etc..... all complete as per approved design specification and direction of E/I. (Brick Bat) CH:- 563M to 600M. $37.00 \times 4.10 + 5.30/2 \times 0.700 + 0.900 + 0.700/3 = 133.32 \text{ M}^3$ CH:- 1800M to 1820 M. $20 + 18/2 \times 4.10 + 6.10/2 \times 3.0 + 4.0 + 3.0/3 = 323.00 \text{ M}^3$ 456.32 M³ Less for H.P $1 \times 22/7 : 4 \times (1.23) \times 5.00$ $(-) 5.94 \text{ M}^3$ Total= 450.38 M³	M ³	450.38	2053.84	925008.00
2	Supplying Fitting and and fixing Hume pipe 1000mm dia Hume pipe all complete as per approved design specification and direction of E/I. 2Row x 2 Nos. x 2.50M = 10M	M	10	4258.65	42587.00
				Rs.	967595.00
				Say Rs.	967600.00


 T. 9. 2020
 JE.


 22/09/2020
 AE.


 07/10/2020
 EE.


 25.12.20

 25.12.20

Inspection Report for Flood Damage Works:-

Date:-

1. Name of PIUs:- Executive Engineer. R.W.D. (W) Div.ⁿ Dhaka
2. Name of Block:- Dhaka
3. Name of Road :- Dhaka. Ghorasahan Turkaula.

(A)For Road

1. Damage Location Chainage:-

2. Damage Length:- 57 M

3. Name of Damage:- Road cutting due to flood

4. Details of Restoration Work:-

- (i) Material being used in Restoration works:- Brick bats
- (ii) Equipments Tools being used in restoration works:-
- (iii) Procedure take up in restoration works:- Departmental
- (iv) Restored Length:- 57 M


26/12/2020
Executive Engineer
R.W.D. (W) Div.ⁿ
Raxaul