




ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

DETAILED PROJECT REPORT FOR FDR

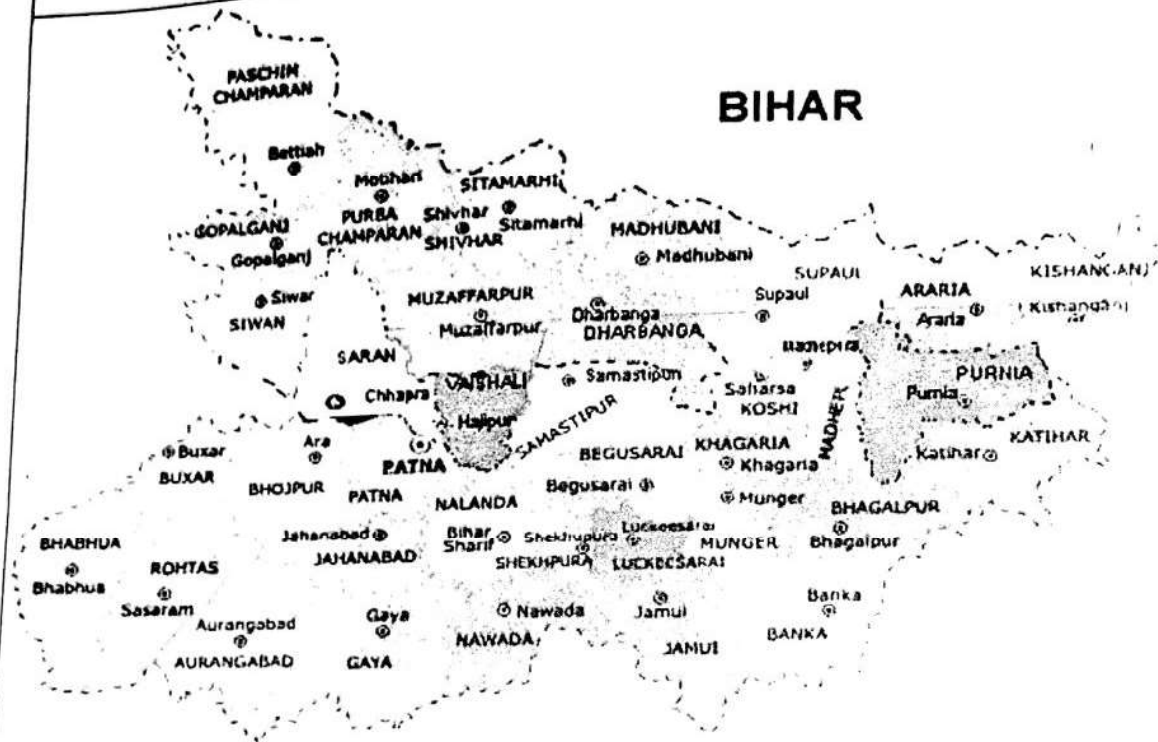

Name of the Road :- Dharmagatpur pitch road to Titra Ashanand 1041 tak

DISTRICT Muzaffarpur

DIVISION Muzaffarpur East-1

BLOCK Muraul

TOTAL LENGTH OF ROAD	:	3.340	KM
----------------------	---	-------	----

CONSTRUCTION COST	:	12.333	Lac
-------------------	---	--------	-----

Submitted By :- Executive Engineer
RWD Work Division Muzaffarpur East-1

GENERAL ABSTRACT

Name of the Road :-
District
Block
Division

Dharmagatpur pitch road to Titra Ashanand 1041 tak
Muzaffarpur
Muraul
Muzaffarpur East-1

3.34 KM

Length of Road (in Km)

Sl. No.	DESCRIPTION	AMOUNT (LAKHS)
1	Brick metal brick bats	9.333
2	Sand Filling	3.000
3	Sand bag	0.000
4	Bamboo Piles	0.000
	GRAND SUB TOTAL	12.333
TOTAL COST OF PROJECT IN LACS =		12.333

[Signature]
JE
RWD

[Signature]
AE
RWD

[Signature]
EE
RWD

Technically approved for Rs. 1233300 = (Rs. Twelve
lacs thirty three thousand three hundred) only.

[Signature]
S.E., RWD
Muzaffarpur

प्रतिवेदन

पथ का नाम

:- धर्मागतपुर पीच रोड से तितरा आशानन्द L041 तक पथ में बाढ़ से क्षतिग्रस्त भाग का मरम्मत कार्य का प्राक्कलन


प्राक्कलित राशि

:- रु0 1233300.00

इस वर्ष आये बाढ़ के कारण बुढ़ी गंडक नदी से निकले गंडक नहर का पूर्वी कैनाल SH के पास टूटने से बाढ़ के पानी से उक्त पथ के चैनेज 650 मीटर से 710 मीटर तक 60 मीटर लंबाई में बिल्कुल कटाव हो जाने से आवागमन बाधित हो गया। बाढ़ से कटाव वाले भाग में आवश्यकतानुसार लोकल बालू भराई एवं Brick Bats का प्रावधान किया गया है। प्राक्कलन वर्तमान स्वीकृत दर पर तैयार किया गया है।

प्राक्कलन अग्रेतर कार्रवाई हेतु समर्पित है।


कनीय अभियंता
मुरौल


सहायक अभियंता
मुरौल


कार्यपालक अभियंता
ग्रामीण कार्य विभाग, कार्य प्रमंडल
मुजफ्फरपुर पूर्वी-1

Inspection Report for Flood Damage Work

Date

- 1 Name of PIUs- EXECUTIVE ENGINEER RWD (W) DIV. Muzaffarpur East-1
2 Name of Block/Road- Muraul / Dharanagarapur Pith road to
Hira Ashangad local tank.

A For Road

- 1 Damage Location/Chainage CH. 650 to 710
2 Damage Length 60 Mtr
3 Nature of Damage Complete Traffic block due to breach of road.
4 Details of Restoration Works-
i Material being used in Restoration Works- Broken bit, local sand
ii Equipments/Tools being used in Restoration Works- Static Roller, Tractor
Mgomet.
iii Procedure Taken up in Restoration Works- Immediate to the
restoration.
iv Restored Length 60 Mtr

B. For Bridge

- 1 Damage Location/Chainage
2 Damage Length
3 Nature of Damage
4 Details of Restoration Works-
i Material being used in Restoration Works-
ii Equipments/Tools being used in Restoration Works-
iii Procedure Taken up in Restoration Works-
iv Restored Length

N/A

Signature of JE/ AE/ EE

Signature
(Name of Inspector)

Name of the Road :- Dharmagatpur pitch road to Titra Ashanand 1041 tak						
Sl. No.	SDB SL .NO	MORD Ref. No	Description	Unit	QUANTIT Y	AMOUNT (in Rs.)
1		13.7 SoR Bihar Govt. (1985)	Jhama metal Labour for consolidation in Jhama metal by Road Roller in proper grade camber and super elevation dry and wet rolling including cost of running charge of roller diver and khalasi making and maintaining diversion light barrier - do - do - danger signal etc. all complete.			
			Appendix - I	Cum	459.0	
2		11.20	Sand Filling Filling in foundation trenches as per drawing and technical specification Clause 305.3.9	Total	459.00	933303.06
			Appendix - II			
				Cum	660.000	
				Total	660.00	299989.80
Total Cost :-						1233292.86

26.11.2020
AC

26.11.2020
AC

27.11.20