


RURAL WORKS DEPARTMENT GOVT. OF BIHAR

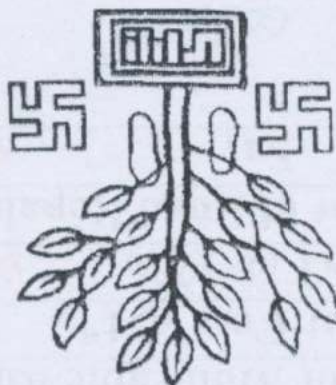

Name of Work:- Yadupati to Matauna and link Road Amanpur to Sakram..

Block:- Sursand.

F.D.R

Rs. 1378191.00

~~1244242.00/-~~
~~1362735.00~~

Year-2020-21

Name of Circle:- R.W.D, Works Circle, Sitamarhi.

Name of Division:- R.W.D., (W) Division, Pupri.

DETAILED ESTIMATE FOR F.D.R

General Abstract of Cost

Name of Road:-Yadupatti to Matauna and link Road Amanpur to

Sakram.

Length of Road:-

Block:- Sursand

District:-Sitamarhi

S. No.	Particulars	Total Cost (in Lakh)
1	Total Cost for Motorable Roads	1101055.00
2	Labour Cess @ 1%	12196.38
3	GST @ 12%	146356.56
	Total Cost of Road Repair	1378190.94
	Say	1244242.00/-1378191.00

JE
21.12.2020

JE
21.12.2020

JE
21/12/2020

अनुमानित और कर के बारे में जानकारी प्राप्त
और कर के बारे में जानकारी प्राप्त- 16/12/20
12/12-10.02.2021 के आदेश पर

AE

12/12/21
12/12/21

25.12.2020
25.12.2020

3/12/21
12/12/21
3/12/21

Technically approved for Rs. 1378191.00 (Thirteen lakh seventy eight thousand one hundred ninety one) only.
Technically approved for Rs. 1362735.00 (Thirteen lakh sixty two thousand seven hundred thirty five) only.
Technically approved for Rs. 1244242.00/- (Twelve lakh forty four thousand two hundred forty two) only.

3/12/21

of Road:-Vadupatti to Matana and link Road Amanpur to Sakram.

Description of Item

1219638.31	Total	1219638.31	1219638.31
1219638.00	Say	1219638.00	1219638.00

Details of Measurement of ditches filled by brick bats and rabbish

Name of Road:-Yadupatti to Matauna and link Road Amanpur to Sakram.

	L	W	H	VOLUME
Ch at 0.200km	13.00	3.500	0.75	34.1250
	12.00	3.500	0.60	25.2000
	3.00	2.000	0.80	4.8000
Ch at 0.300km	15.00	5.500	2.00	165.0000
	2.00	3.000	0.70	4.2000
Ch at 0.400km	15.00	5.500	2.00	165.0000
	12.50	4.000	0.40	20.0000
Ch at 0.500km	20.00	4.000	0.60	48.0000
Amanpur to Sakram At ch 0.100km	4.50	6.000	1.00	27.0000
	6.00	5.000	1.30	39.0000
	6.50	5.000	1.30	42.2500
At ch 0.250km	8.00	4.000	0.60	19.2000
	12.50	4.000	0.65	32.5000
	6.00	4.200	0.80	20.1600
	14.00	4.000	0.80	44.8000
	18.00	4.000	0.60	43.2000
	6.00	4.200	0.70	17.6400
At ch 1.10km Slab Culvert	15.00	5.500	0.80	66.0000
	6.00	5.500	1.20	39.6000
Total (in Cum)				857.6750
Laying Hume Pipe of 1000 mm dia	10	0	0	10.00
Cement Bage				

28.12.2020
for
RMS, Belgaum

21.12.20
for
RMS, Belgaum

21.12.20
for
RMS, Belgaum

21.12.20
for
RMS, Belgaum

772.10
33.00
41.815
98.80
33.60
32.50
30.00
47.00
140.85
160.05

