



ग्रामीण कार्य विभाग

पथ का नाम	:- PMJAY पब्लिक नष्ट रोड
कार्य प्रमण्डल	:- बेनीपुर।
कार्य अंचल	:- दरभंगा।
प्रखण्ड का नाम	:- बेनीपुर।
प्राक्कलित राशि	:- Rs. 2,51,57,000 2,60,459 = 00


प्रतिवेदन


पथ का नाम :- PMGSY पथ ले-नहर रोला
पथ की लं० :- 1.825 KM
प्राक्कलित राशि :- Rs. 225197=00


माह जुलाई अगस्त में हुई अतिवृष्टि के फलस्वरूप विभिन्न नदियों एवं नालों में आये बाढ़ के चलते अधिकांश पथ क्षतिग्रस्त हो गये एवं यातायात बाधित हो गया।

जनता की परेशानी, एवं आने वाले आम चुनाव (बिहार विधान सभा) एवं विभागीय आदेश -मु० अ०-04मु० विविध कार्य 23-40/2016-2729अनु० दिनांक-21.08.2020 के आलोक में क्षतिग्रस्त पथों के ईट टुकड़े एवं चिमनी छाई से भरकर यातायात पुर्नस्थापन किया गया। किये गये कार्य के अनुसार प्राक्कलन तैयार कर घटनोत्तर स्वीकृति हेतु समर्पित की जा रही है। कार्यहित में प्राक्कलन की स्वीकृति अपेक्षित है। ईट टुकड़ा की उपलब्धता कार्यस्थल से 8 कि०मी होने के कारण BRICK BATS के दर गणना में 8 कि०मी० लीड का प्रावधान किया गया।

प्राक्कलन को कार्य अंचल, दरभंगा द्वारा स्वीकृत अद्यतन दर के आधार पर तैयार कर अग्रेतर कार्यवाई हेतु समर्पित की जाती है।


कनीय अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रशाखा बेनीपुर,


सहायक अभियंता,
ग्रामीण कार्य विभाग,
कार्य अवर प्रमण्डल बेनीपुर,


कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल बेनीपुर,

Flood Estimate
Name of Road:- PMGSY Path to Nahar Tola

Sl No	Particulars of Item	Quantity (In M ³)	Rate	Amount
1	Providing and laying Filling in ditches with brick bats including loading, unloading and light ramming all complete job. As per specification & Direction of E/I	117.49 130.39	1867.76	2,19,443.20 243537.2264
				2,19,443.20

S.F. - 117.49 x 1063 x 107. - 12489.20
 Add 12% GST
 1% L.C

= 20224-26333.20
 = 2435 2194.20
 Total = 275197
 S.F. 12489.20
 Rs. 260459.20

[Signature]
 J.E
 RWD, Benipur

[Signature]
 21/12/2020
 A.E
 RWD, Benipur

[Signature]
 E.E
 RWD, Benipur

कार्पिपालक अभियंता साठ कां वि० कार्य प्रगति अगनका के फाउंड 798 (रु०) दि० 4-4-2021
 के द्वारा वसति गौच प्रतिवेदन में आधार पर
 Post facto T.A. for Rs. 2,60,459.20 (Rupees Two lakh sixty thousand four hundred fifty nine) only.

[Signature]
 09.04.21
 Superintending Engineer
 R.W.D. (W) Chirang, Dibrugarh
 09/04/2021

Flood Estimate

Name of Road:- PMGSY Path to Nahar Tola

Name of Road:- PMGSY Path to Nahar Tola					
Item No.1	Providing and laying Filling in ditches with brick bats including loading, unloading and light ramming all complete job. As per specification & Direction of E/I				
S.N	Chainage	Length (In M)	Average Width (In M)	Average Height (In M)	Qty
1	Ch 125-212 m	87.00	$(4.3+4.5)/2$	$(0.3+0.4)/2$	129.41
2		4.00	0.60	$(0.15+0.30)/2$	0.42
3		1.50	1.50	0.20	0.45
Total=					130.28

[Signature]
J.E
RWD, Benipur

[Signature]
A.E
RWD, Benipur

[Signature]
E.E
RWD, Benipur

Physically verified and corrected as per site

[Signature]
07.04.21
A.E

CL
[Signature]
219

Flood Estimate


Name of Road:- PMGSY Path to Nahar Tola

Providing and laying Filling in ditches with brick bats including loading, unloading and light ramming all complete job. As per specification & Direction of E/I					
Item No.1	Chainage	Length (In M)	Average Width (In M)	Average Height (In M)	Qty
1	Ch 125-212 m	87.00	$\frac{3.0+4.5}{2}$	$\frac{(0.3+0.4)}{2}$	129.41 116.62
2		4.00	0.60	$\frac{(0.15+0.30)}{2}$	0.42
3		1.50	1.50	0.20	0.45
Total=					130.28 117.49

[Signature]
J.E
RWD, Benipur


[Signature]
A.E
RWD, Benipur

[Signature]
E.E
RWD, Benipur

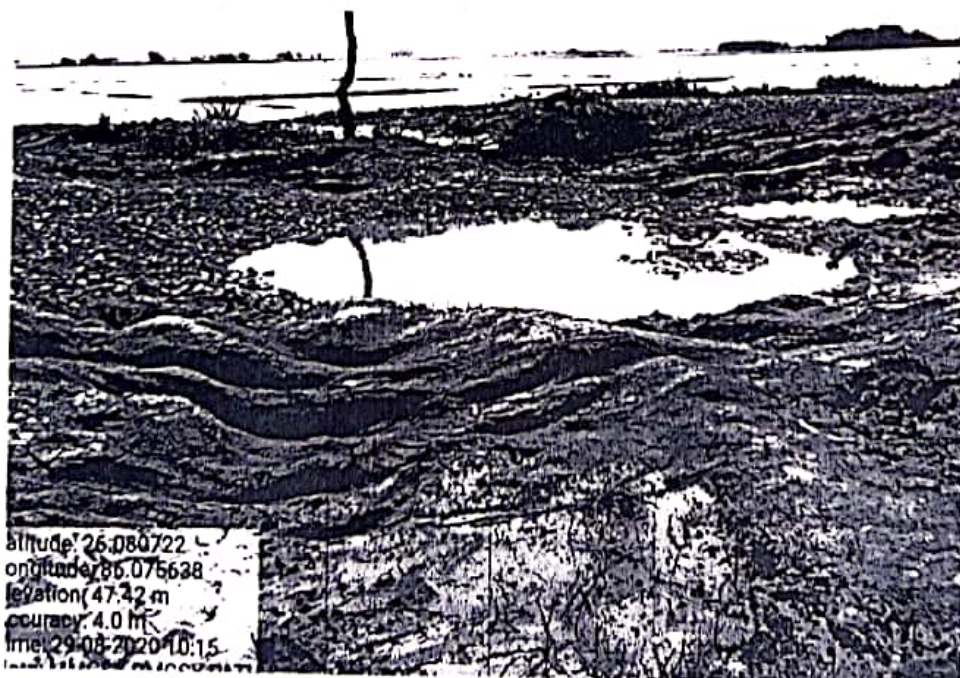

APC
2/12/2020

1.11.2020 11:04 3.96L 2501

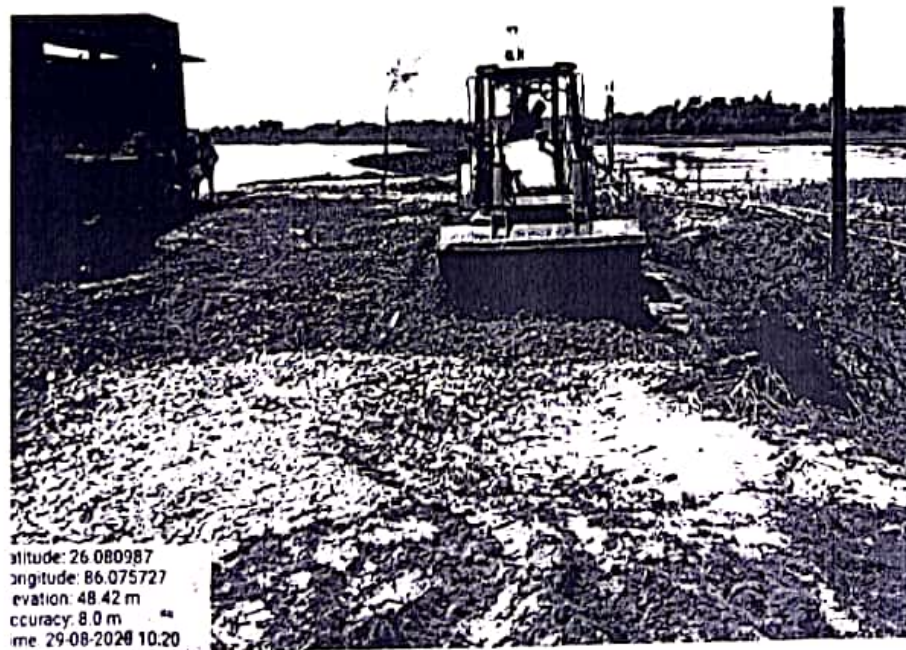

ABE
21/12/20

पिन्डस वष बें नहर रील



Altitude: 26 080704
Longitude: 86 075642
Elevation: 48 42 m
Accuracy: 3 5 m
Time: 29-08-2020 10:15



११/११/२०




ABE
5/17/22

PMGSY पथ व नहर रोम



21/2/20

PMGSY PATH TO NAHAR TOLA CH 200

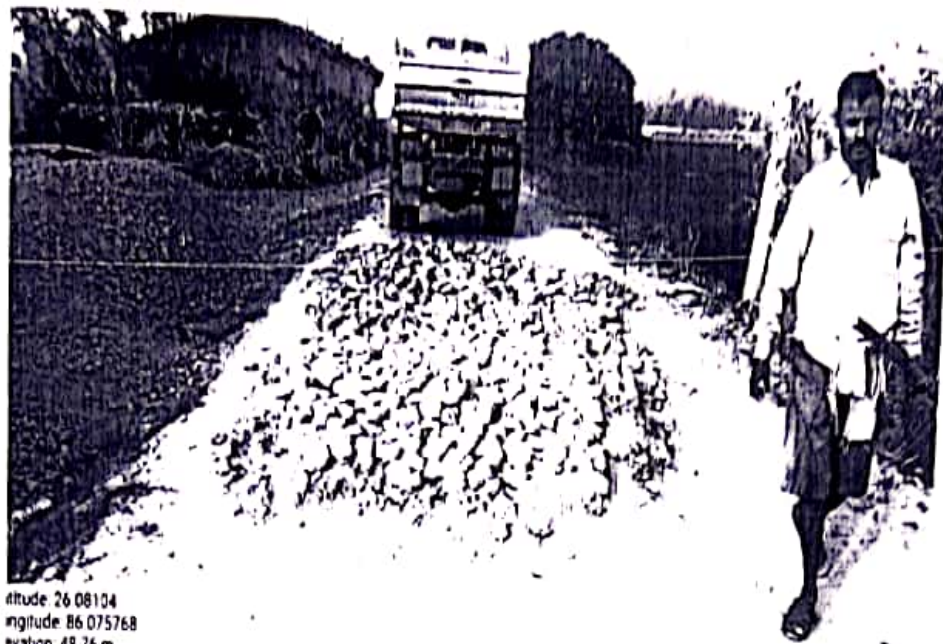

Latitude: 26.08104
Longitude: 86.075768
Elevation: 48.76 m
Accuracy: 3.2 m
Time: 01-06-2021 15:54

Powered by NoteCam



Latitude: 26.081021
Longitude: 86.07577
Elevation: 48.7 m
Accuracy: 3.2 m
Time: 01-06-2021 15:54
Note: PMGSY PATH TO NAHAR TOLA CH 200

Powered by NoteCam

APC
21/12/20